




△△△ SPECIFICATION
 Current Rating:1A
 Voltage Rating:100V AC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

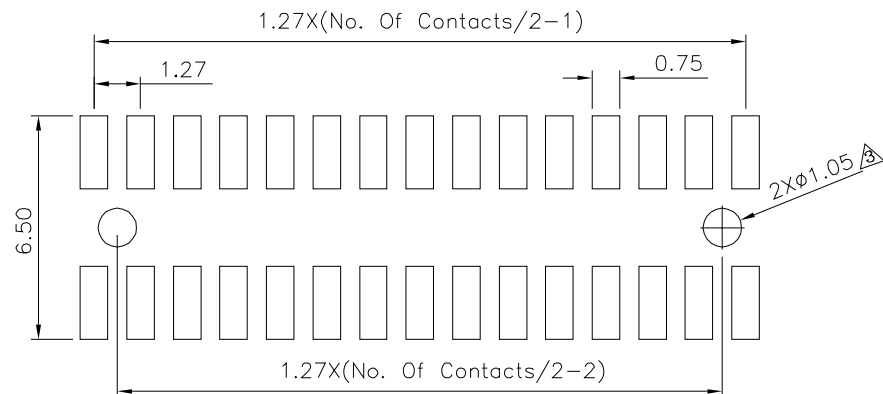

Recommended P.C.B. Layout

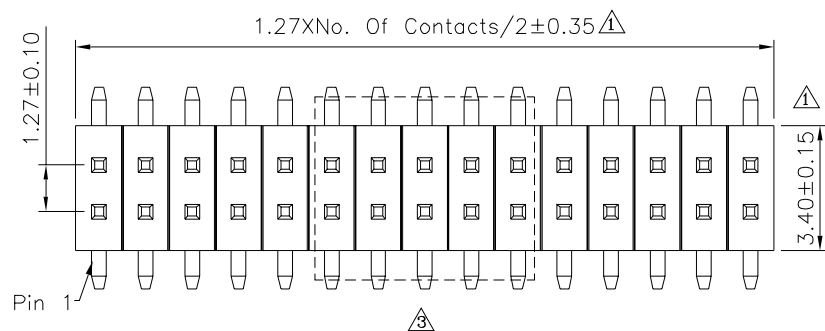


1.27X(No. Of Contacts/2-1)±0.20

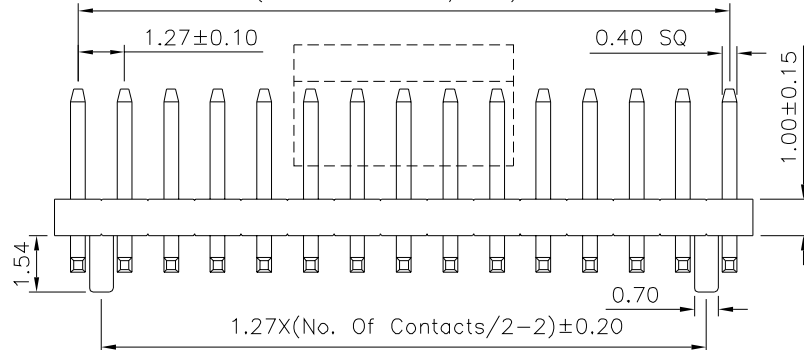


1.27X(No. Of Contacts/2-2)±0.20


△△△ 08~100 Pin

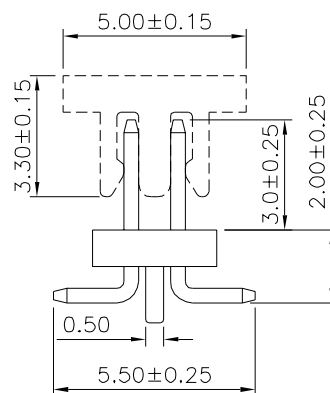

△△△

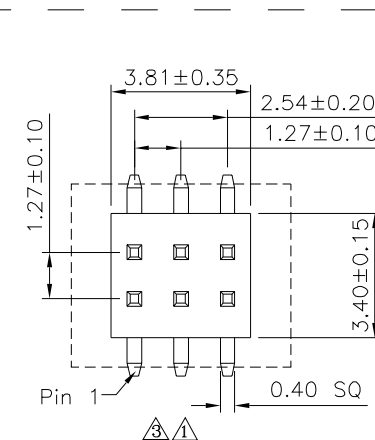


△△△

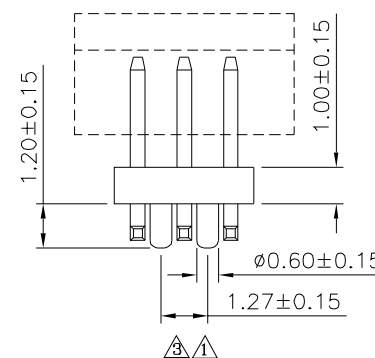


△△△

06 Pin

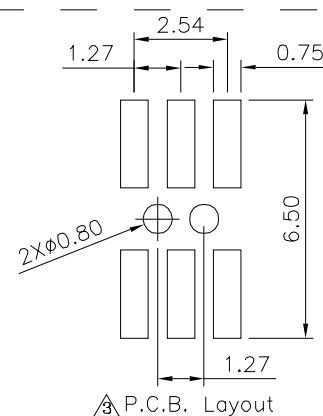

△△△ P.C.B. Layout



△△△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY MEI	
16932		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △			
.X ±0.38	△	A3	Modify Data
.XX ±0.25	△	A2	Modify Data
.XXX ±0.05	△	A1	Modify Data
	△	A0	NEW RELEASE
NO. REV.	REVISIONS		CHK DATE