


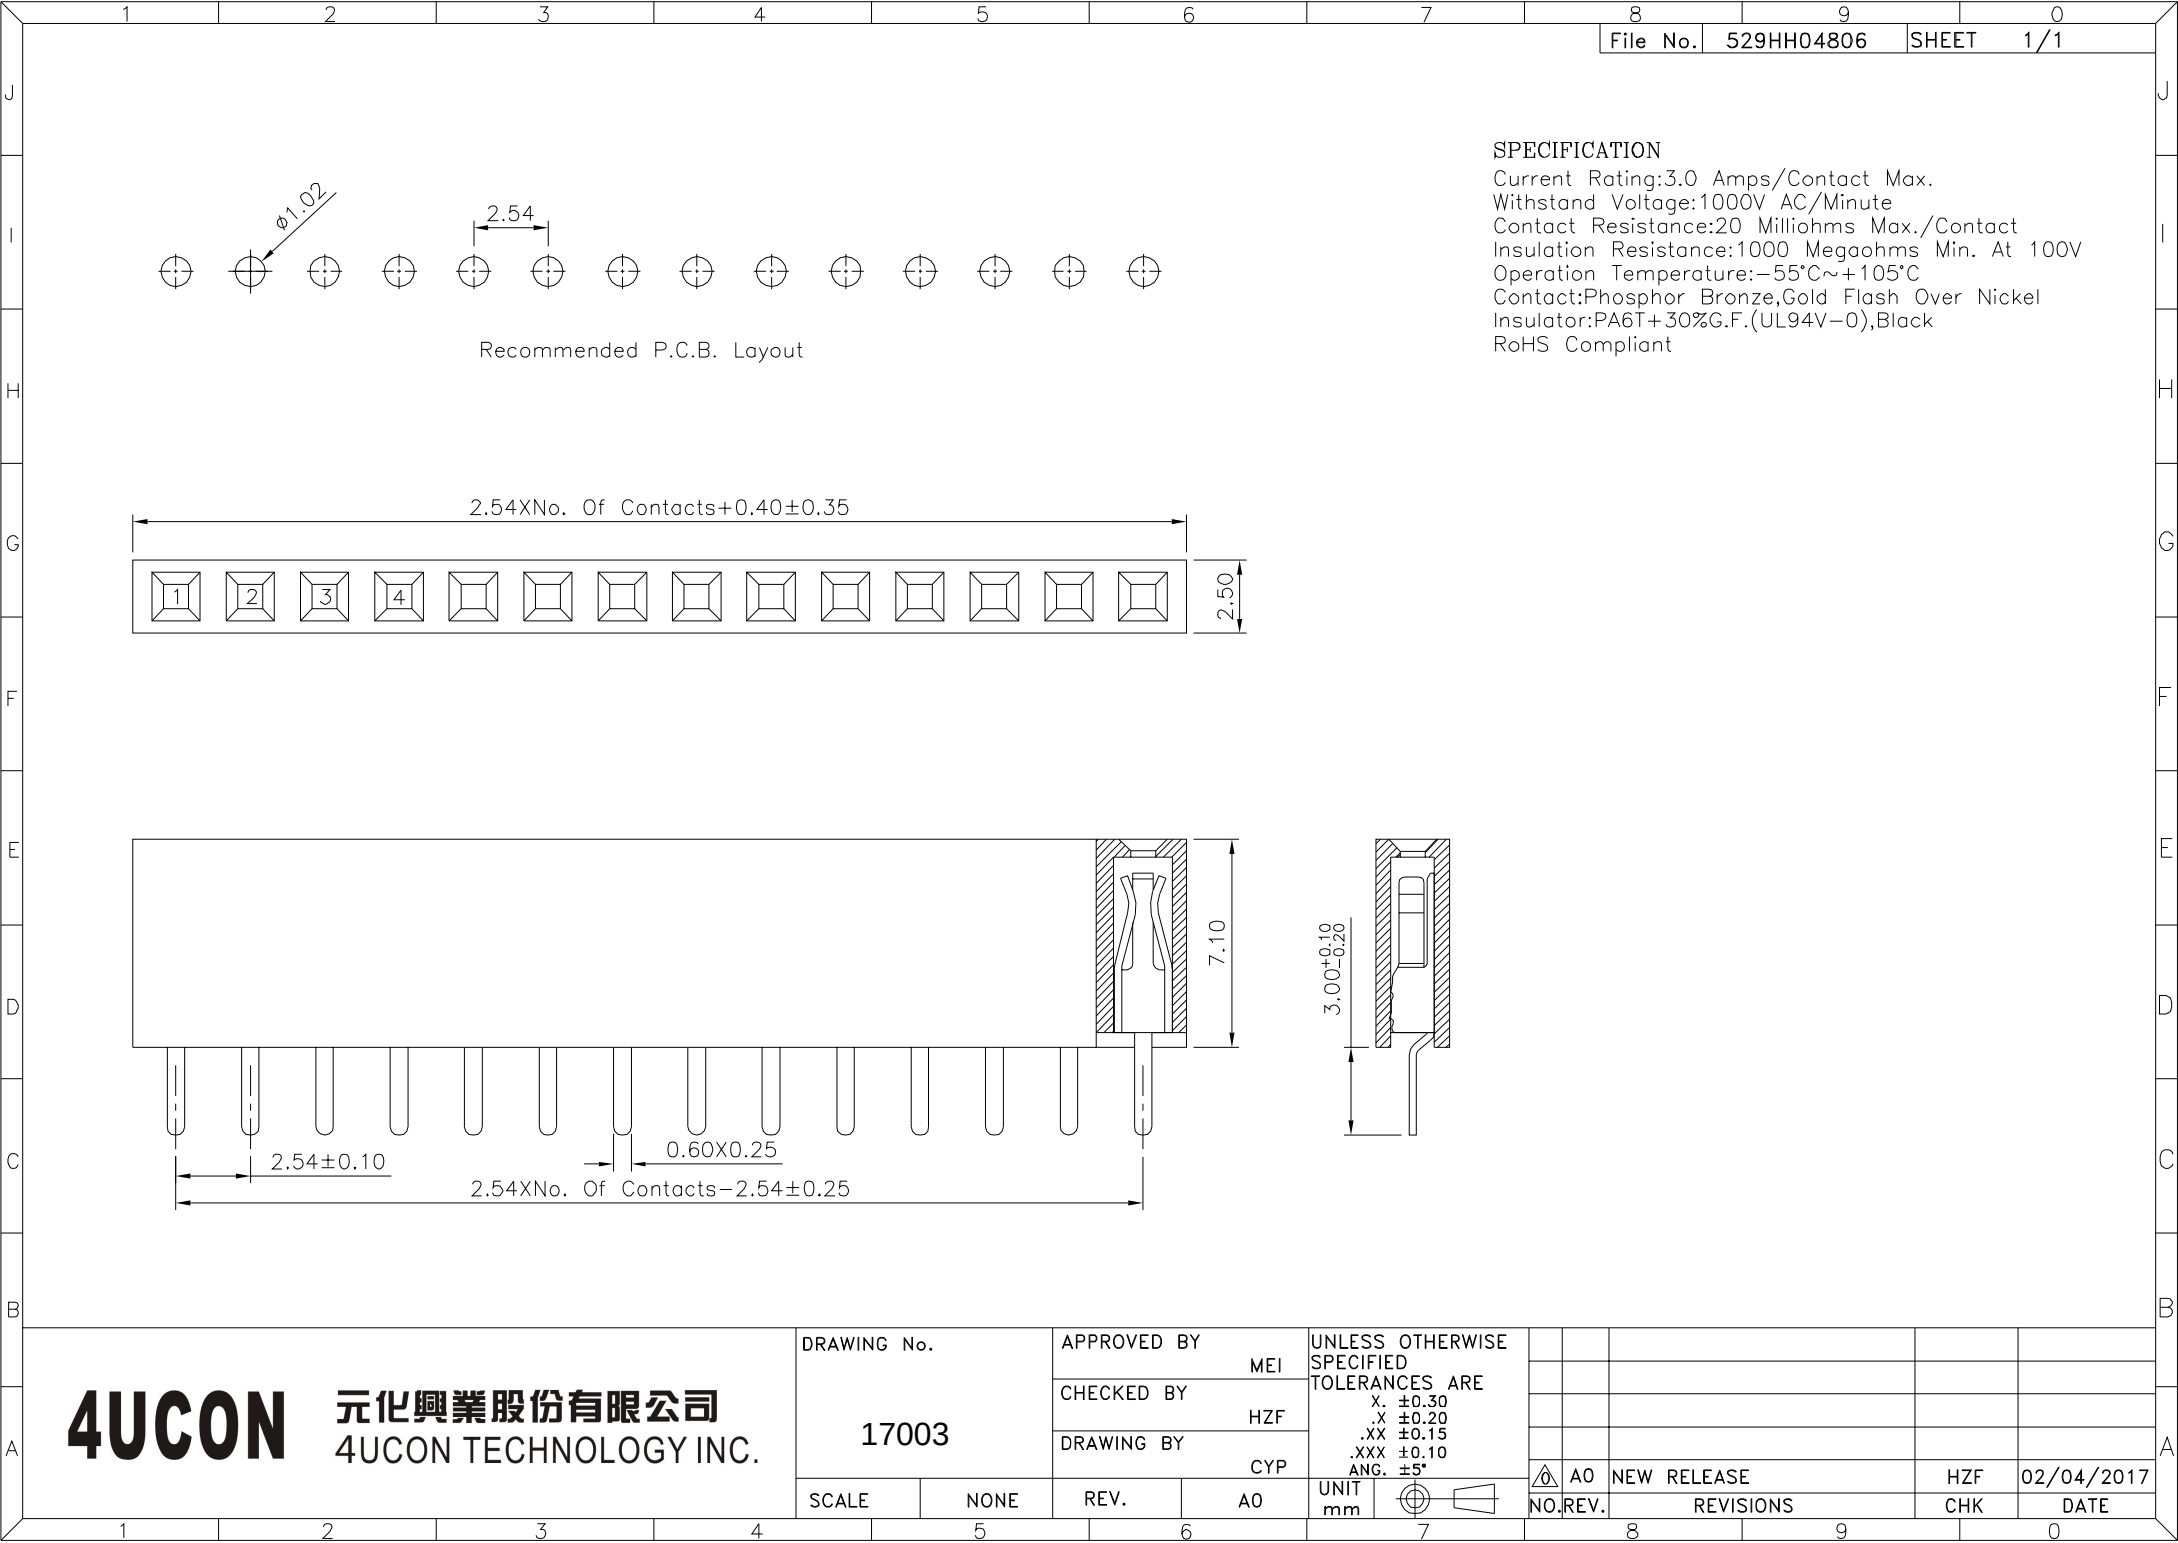

SPECIFICATION
Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
17003		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .X ±0.20 .XX ±0.15 .XXX ±0.10 ANG. ±5°							
UNIT	mm	NO.	REV.	REVISIONS	CHK	DATE	
		△ A0		NEW RELEASE	HZF	02/04/2017	