


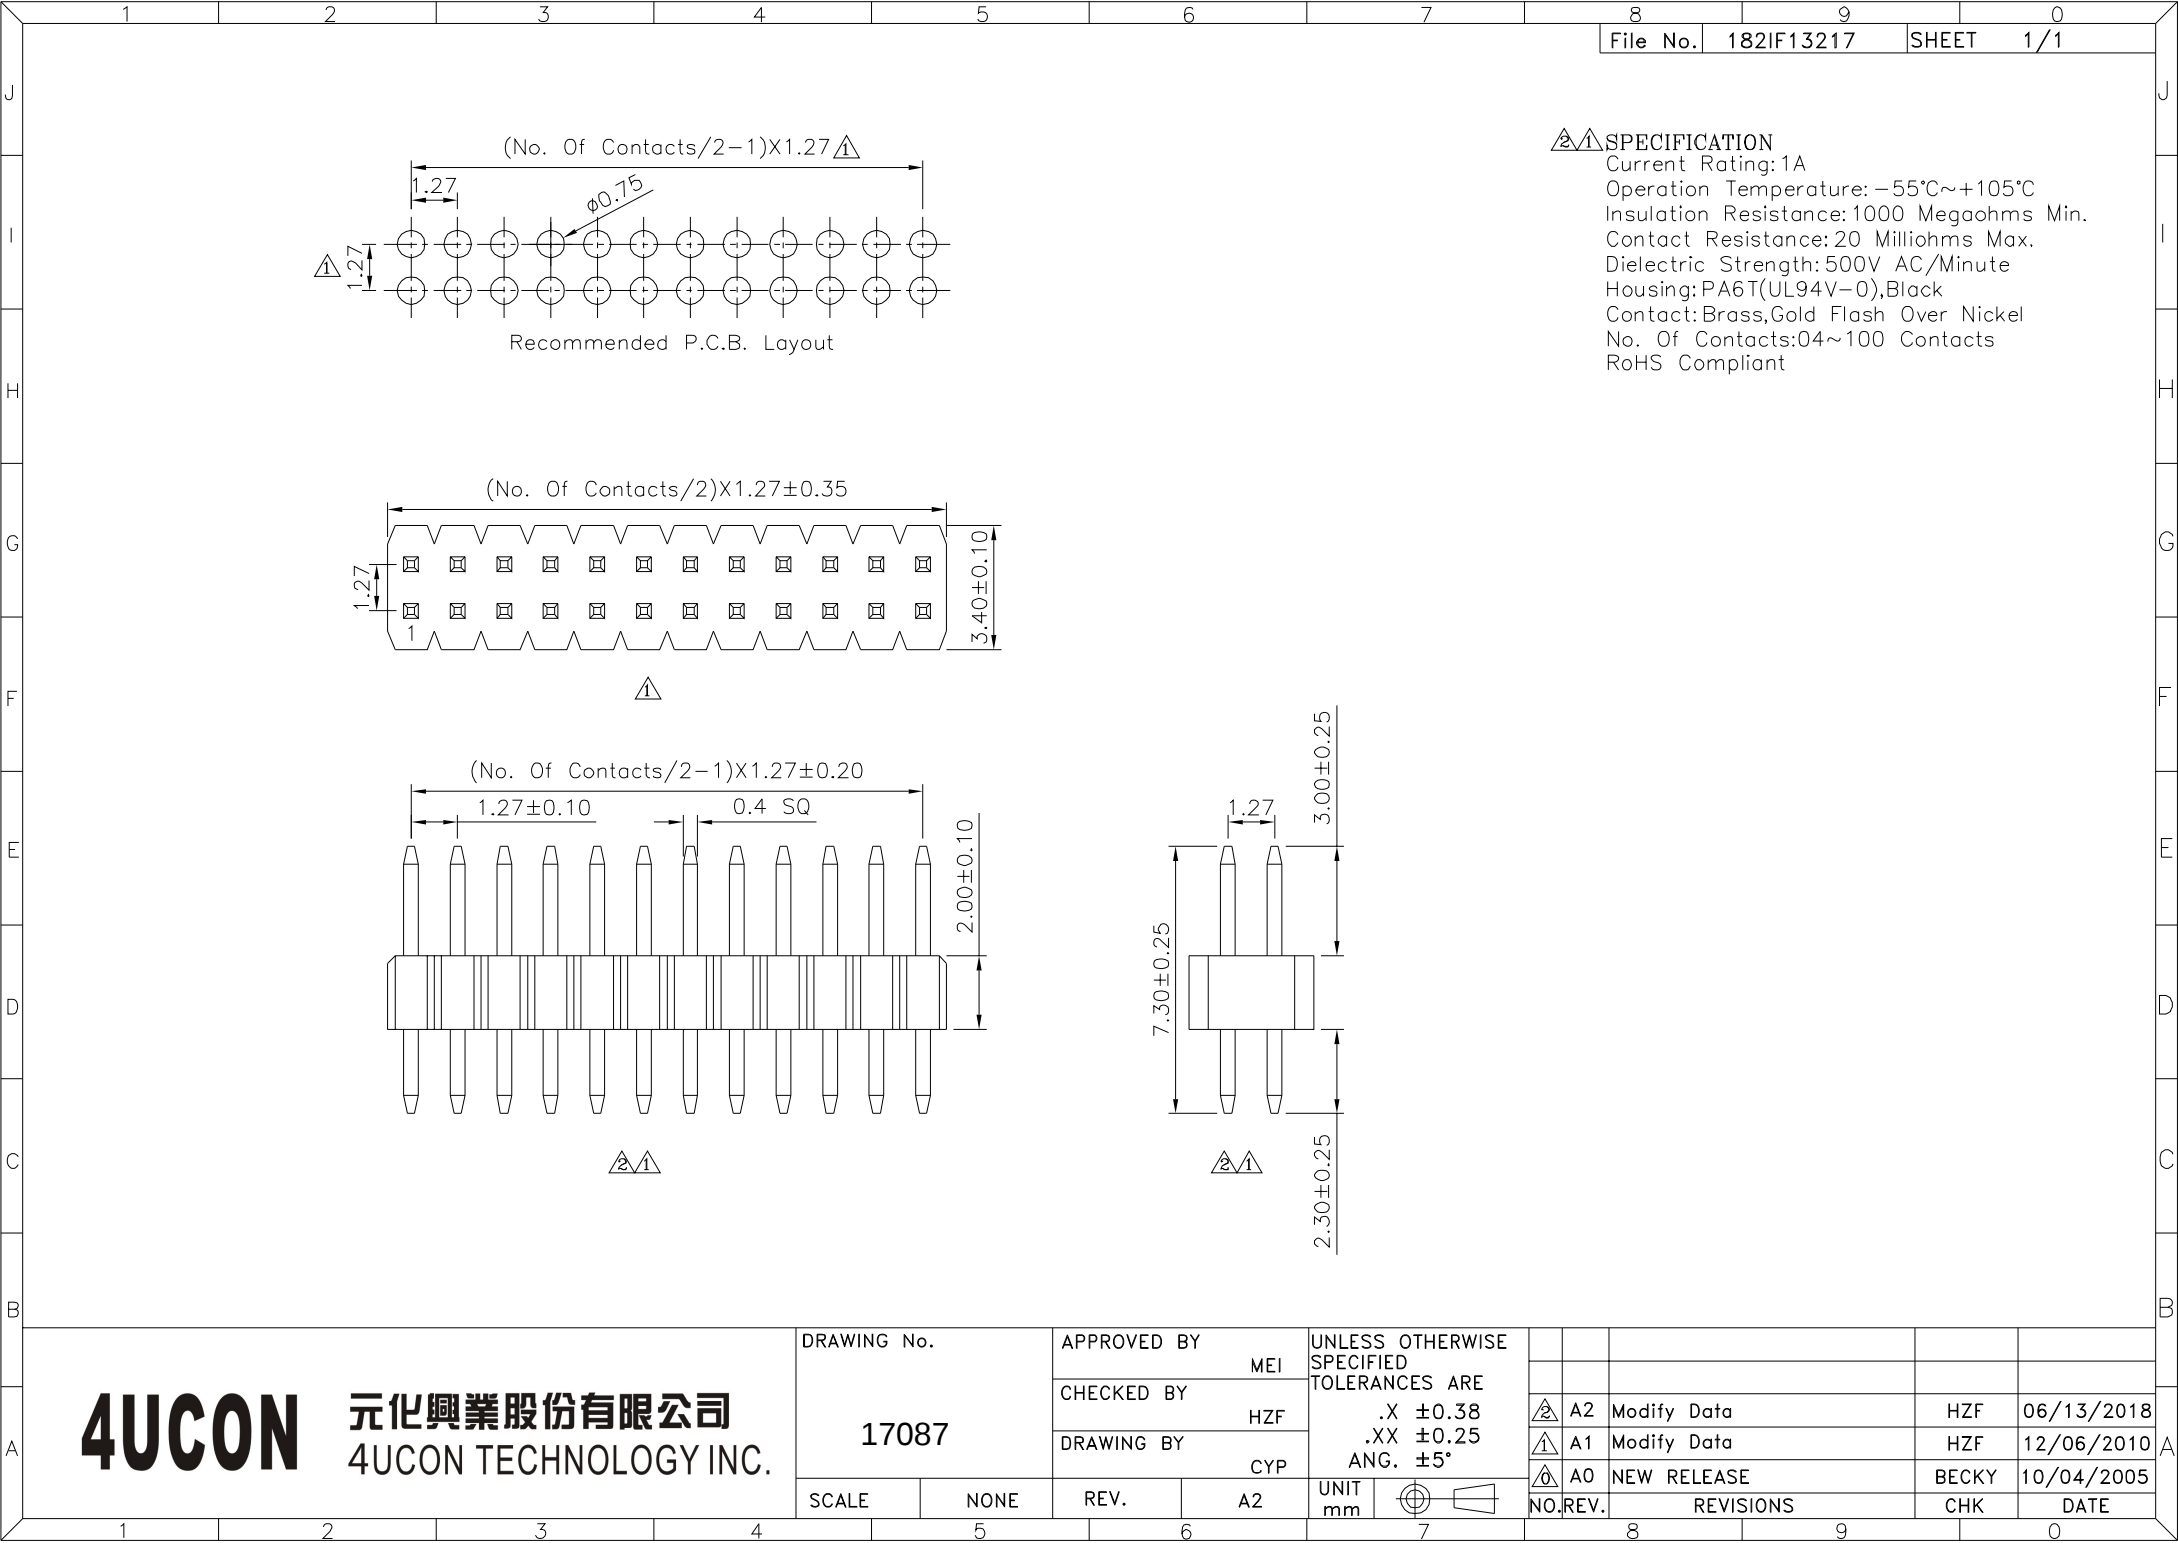


**SPECIFICATION**  
Current Rating: 1A  
Operation Temperature: -55°C~+105°C  
Insulation Resistance: 1000 Megaohms Min.  
Contact Resistance: 20 Milliohms Max.  
Dielectric Strength: 500V AC/Minute  
Housing: PA6T(UL94V-0), Black  
Contact: Brass, Gold Flash Over Nickel  
No. Of Contacts: 04~100 Contacts  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |      |             |    |
|-------------|------|-------------|----|
| DRAWING No. |      | APPROVED BY |    |
|             |      | MEI         |    |
|             |      | CHECKED BY  |    |
| 17087       |      | HZF         |    |
|             |      | DRAWING BY  |    |
|             |      | CYP         |    |
| SCALE       | NONE | REV.        | A2 |

|                                           |       |  |  |
|-------------------------------------------|-------|--|--|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |       |  |  |
|                                           |       |  |  |
|                                           |       |  |  |
|                                           |       |  |  |
| .X                                        | ±0.38 |  |  |
| .XX                                       | ±0.25 |  |  |
| ANG.                                      | ±5°   |  |  |
| UNIT                                      | mm    |  |  |



|          |             |       |  |            |  |
|----------|-------------|-------|--|------------|--|
|          |             |       |  |            |  |
|          |             |       |  |            |  |
| A2       | Modify Data | HZF   |  | 06/13/2018 |  |
| A1       | Modify Data | HZF   |  | 12/06/2010 |  |
| A0       | NEW RELEASE | BECKY |  | 10/04/2005 |  |
| NO. REV. | REVISIONS   | CHK   |  | DATE       |  |