


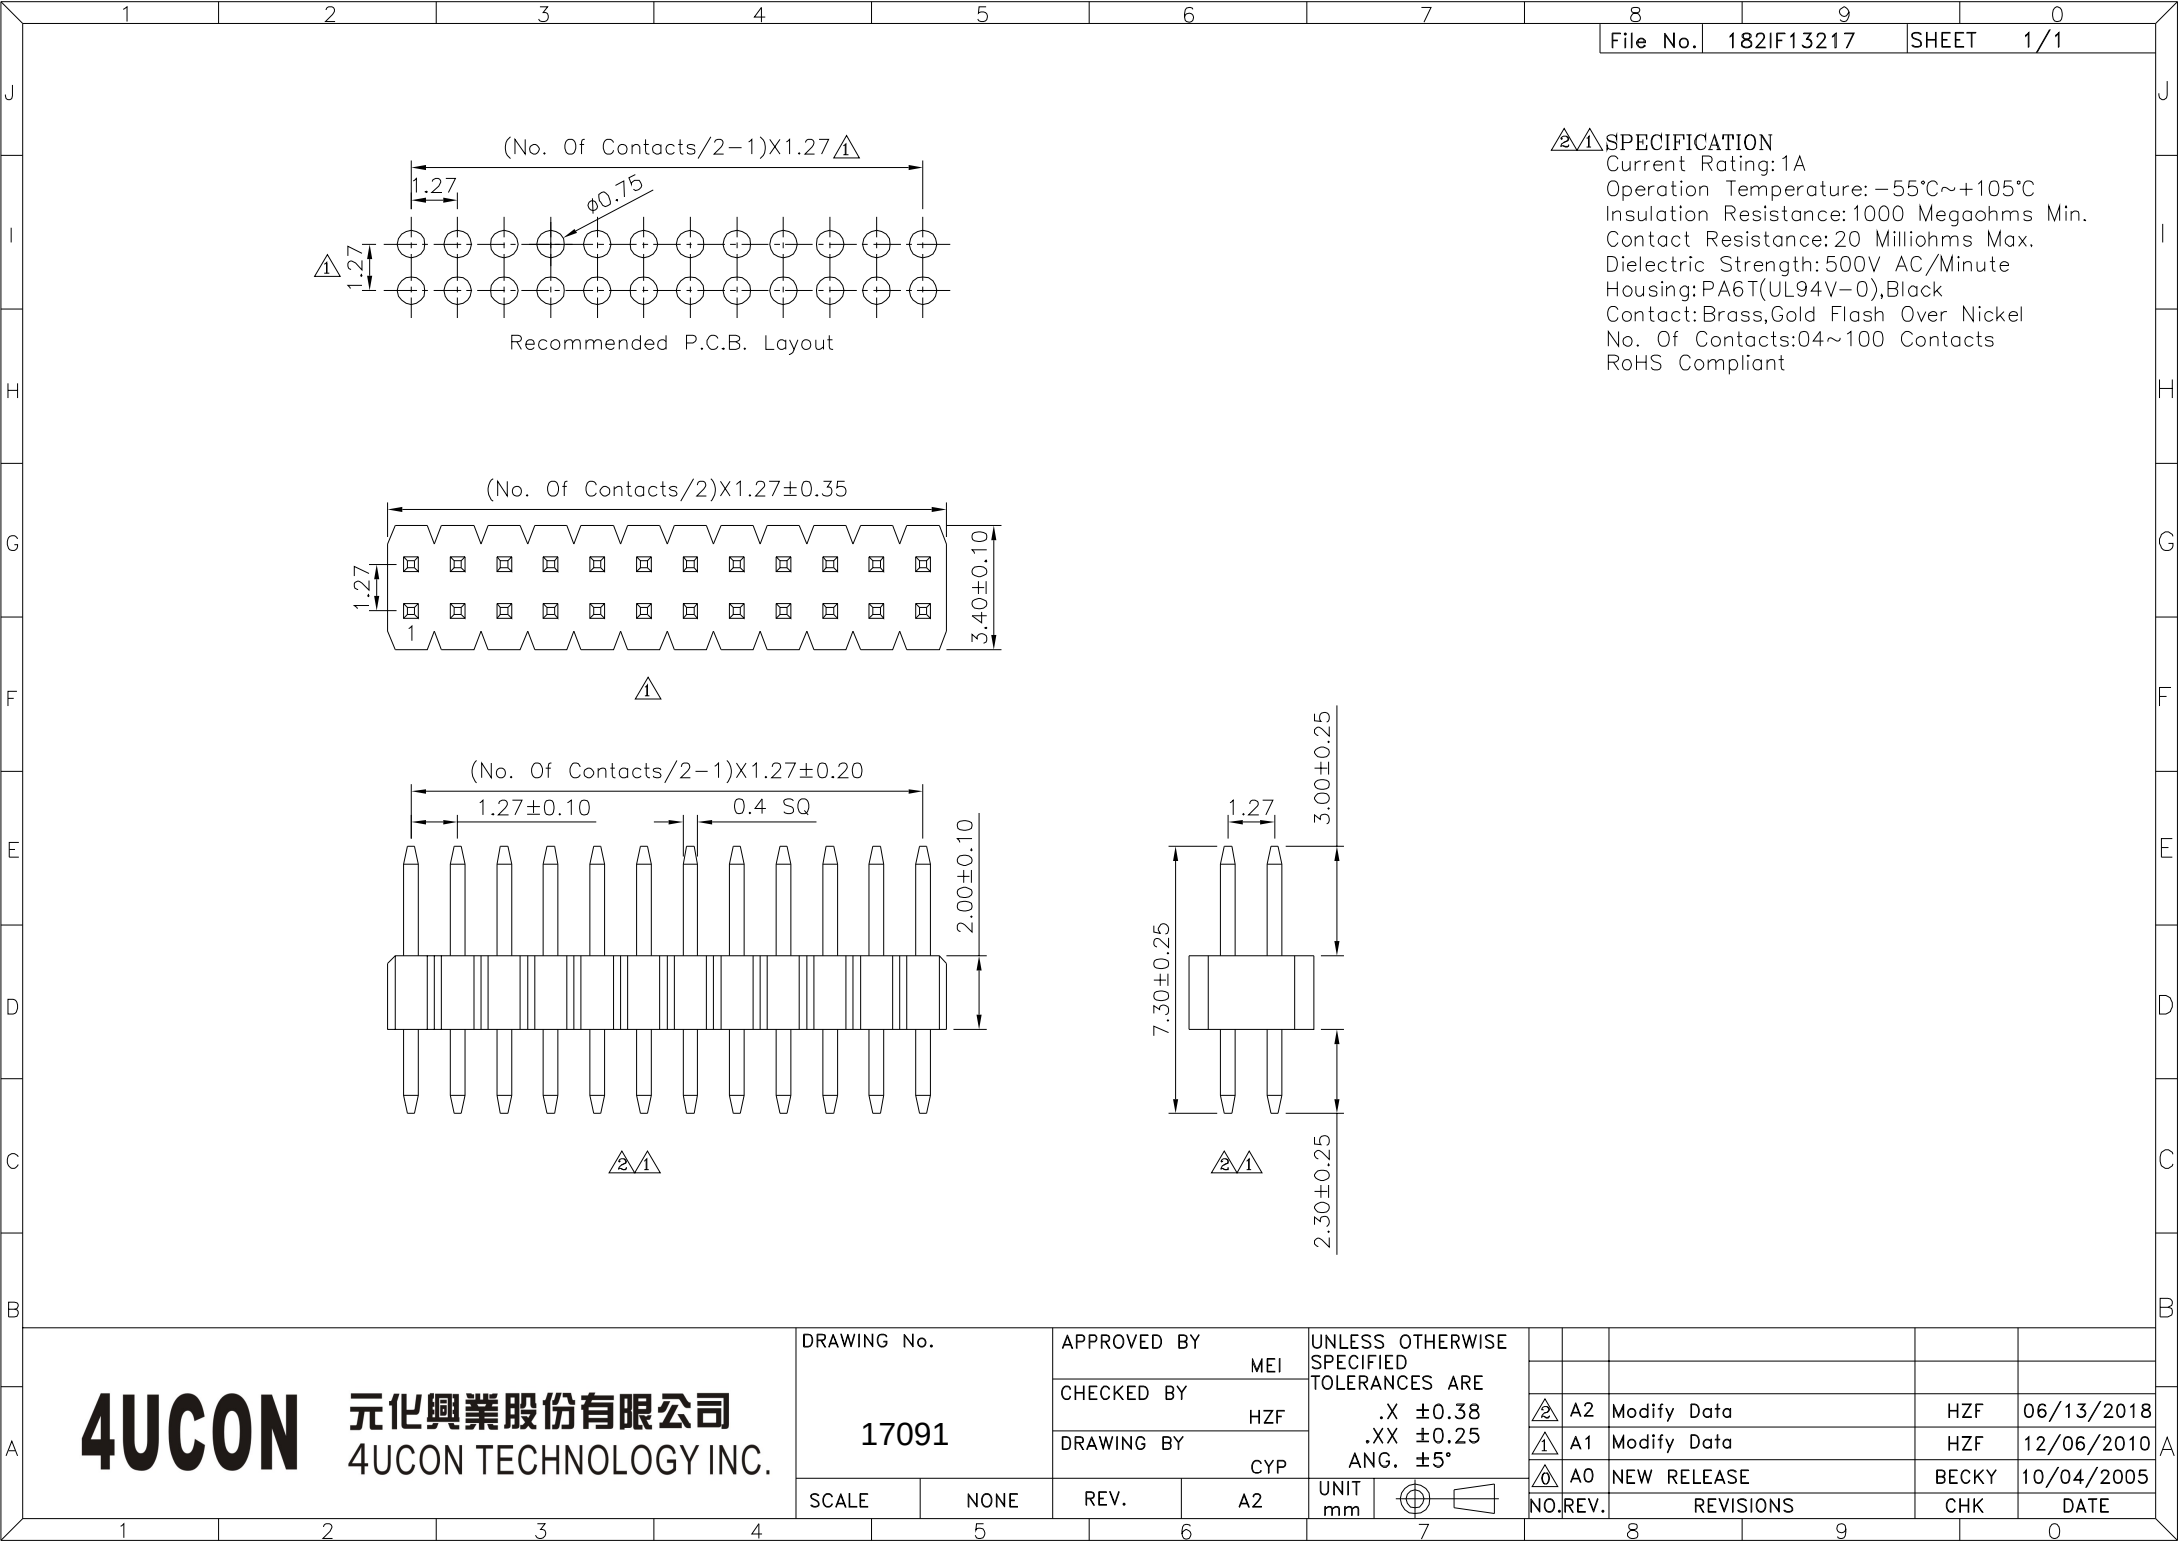

SPECIFICATION
Current Rating: 1A
Operation Temperature: -55°C~+105°C
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Strength: 500V AC/Minute
Housing: PA6T(UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
No. Of Contacts: 04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
17091		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
		.X	±0.38	
		.XX	±0.25	
ANG.		±5°		
UNIT	mm			

	A2	Modify Data	HZF	06/13/2018
	A1	Modify Data	HZF	12/06/2010
	A0	NEW RELEASE	BECKY	10/04/2005
NO.REV.	REVISIONS		CHK	DATE