

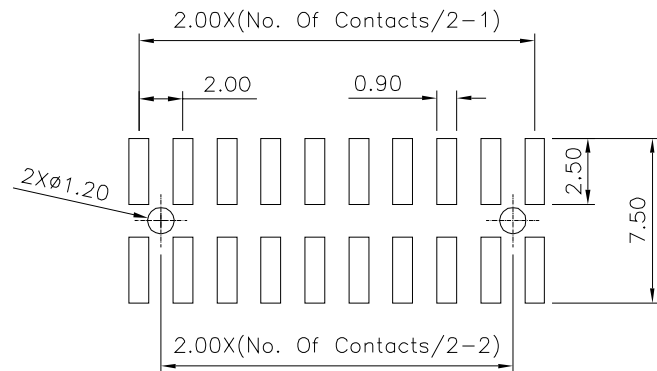
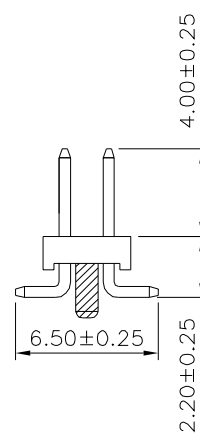


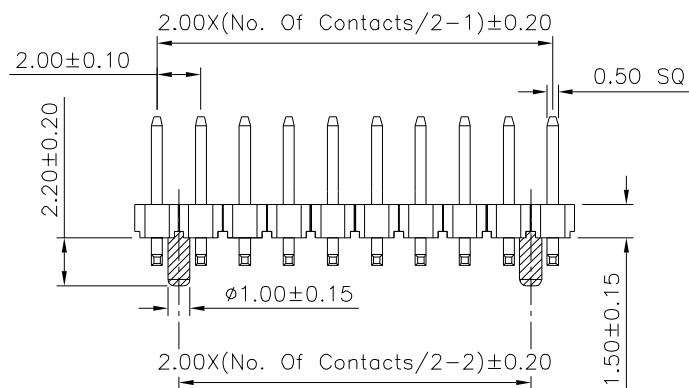

Recommended P.C.B Layout

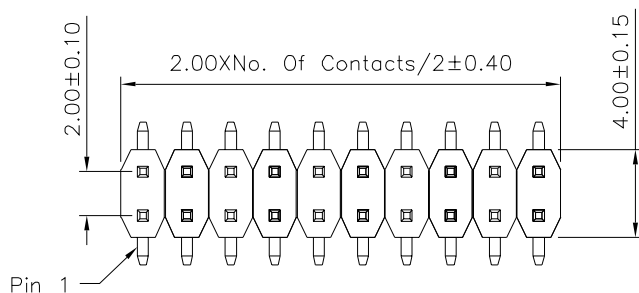

SPECIFICATION

Current Rating:2A
 Dielectric Strength:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:06~80 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17134

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

B0


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

.XXX ±0.05

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ B0	NEW RELEASE	HZF	06/02/2022
------	-------------	-----	------------