

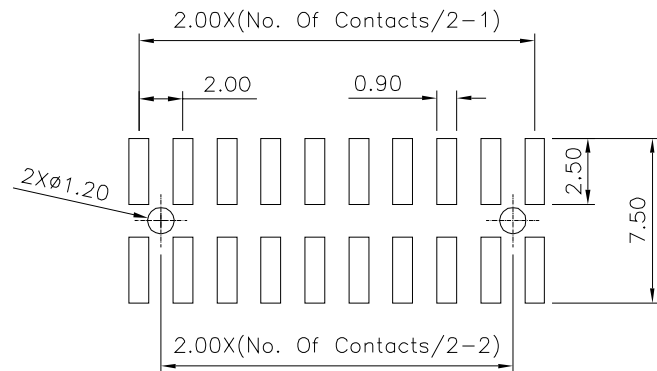
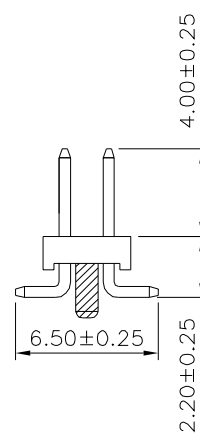


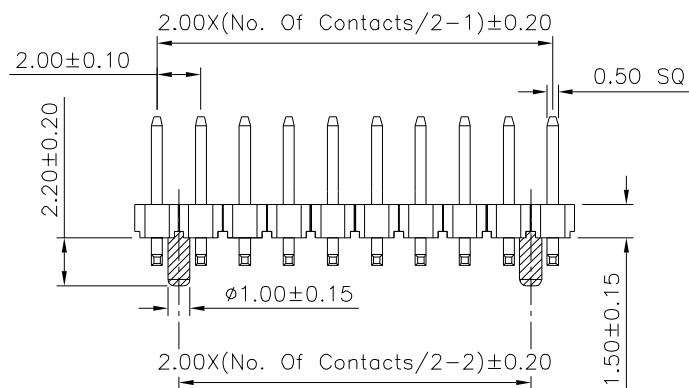

Recommended P.C.B Layout

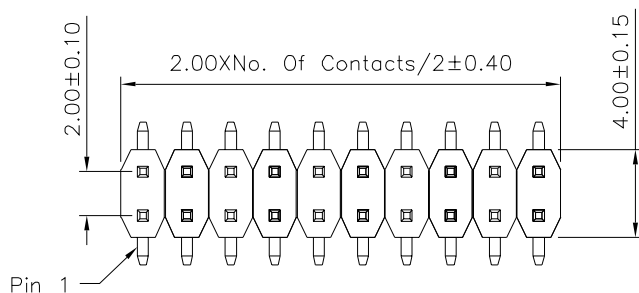

SPECIFICATION

Current Rating:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:06~80 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17143

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

B0


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

.XXX ±0.05

UNIT
mm



NO. REV.

B0

NEW RELEASE

REVISIONS

CHK

DATE

06/02/2022