

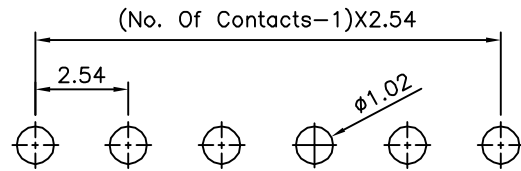
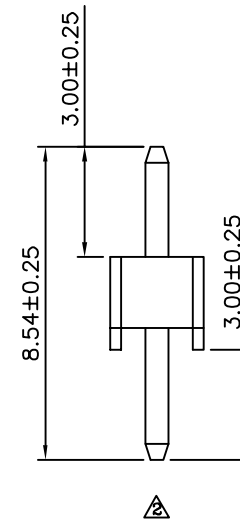


△ SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Black
 △Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

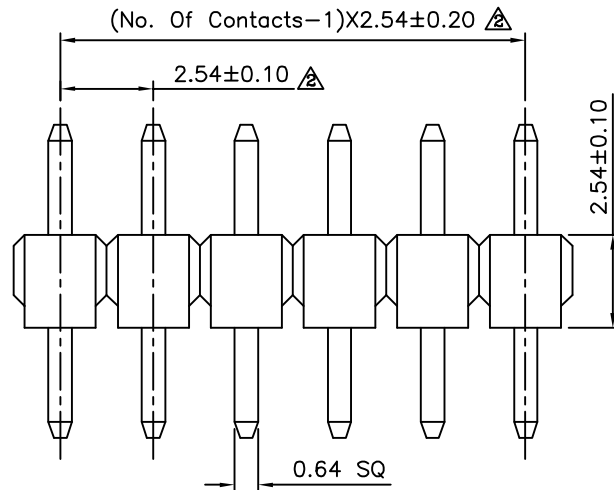

Recommended P.C.B Layout

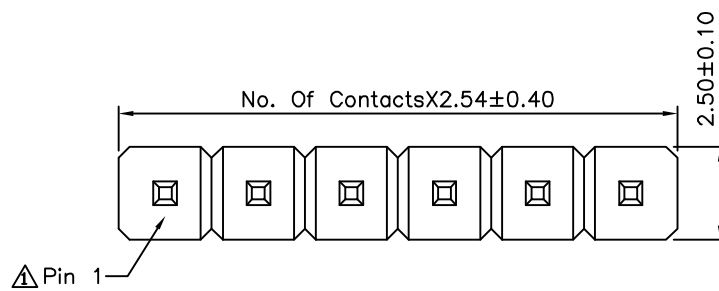

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17172

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG ±5°

UNIT

mm



	A2	Modify Data	HZF	09/18/2014
	A1	Modify Data	HZF	04/16/2011
	A0	NEW RELEASE	EMILY	04/02/2008
NO	REV	REVISIONS	CHK	DATE