

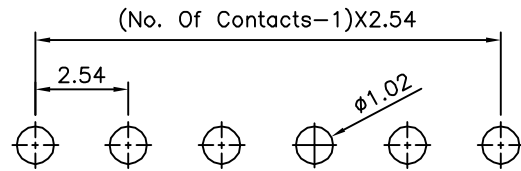
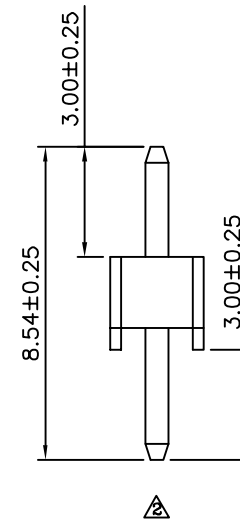


# △ SPECIFICATION

Current:3A  
 Withstanding Voltage:1000V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Housing:PBT(UL94V-0),Black  
 △Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:02~40 Contacts  
 RoHS Compliant

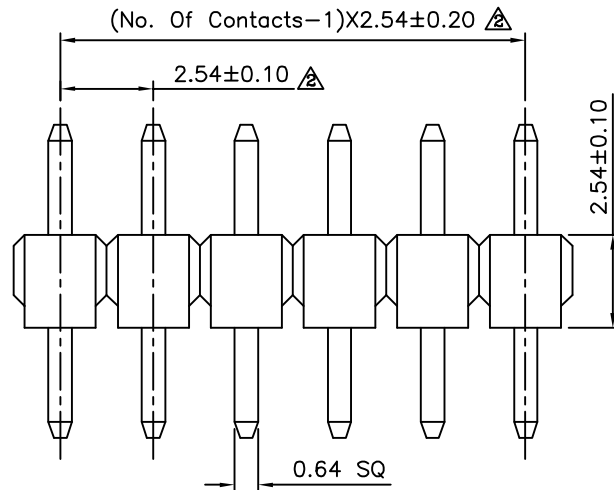

Recommended P.C.B Layout

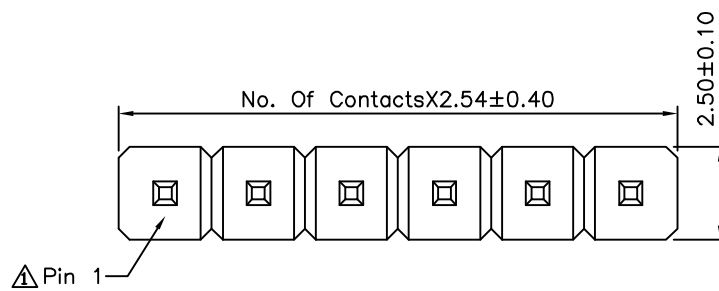

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

17188

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE SPECIFIED


TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG ±5°

UNIT mm



| NO. | REV.        | REVISIONS | CHK        | DATE |
|-----|-------------|-----------|------------|------|
| △A2 | Modify Data | HZF       | 09/18/2014 |      |
| △A1 | Modify Data | HZF       | 04/16/2011 |      |
| △A0 | NEW RELEASE | EMILY     | 04/02/2008 |      |