
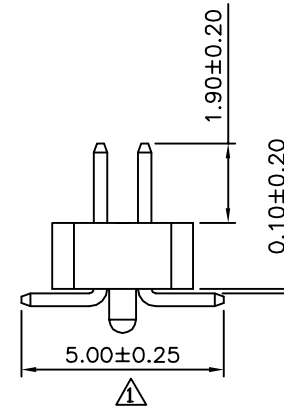
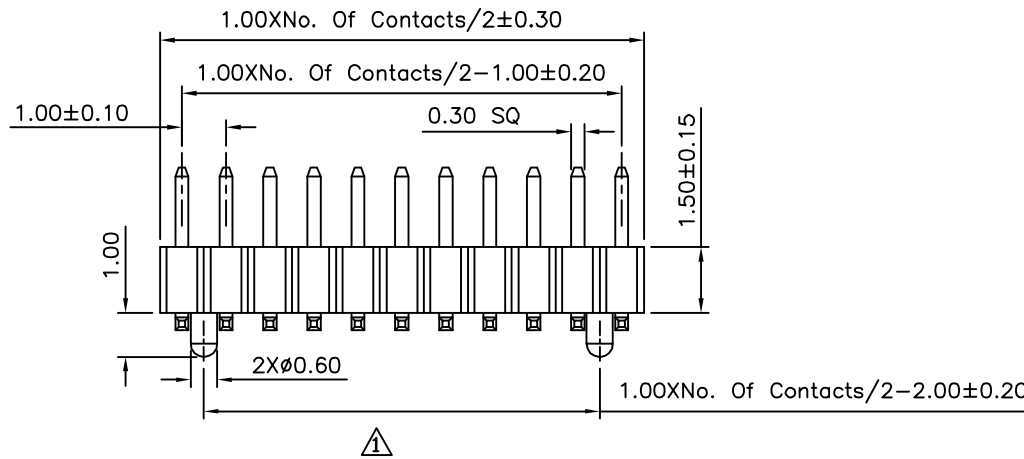


# SPECIFICATION

Current Rating: 0.75 Amp  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 30 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C~+105°C  
 ⚠ Insulator: PA9T+30%G.F.(UL94V-0),Black  
 Contact: Brass,Gold Plated Over Nickel  
 RoHS Compliant

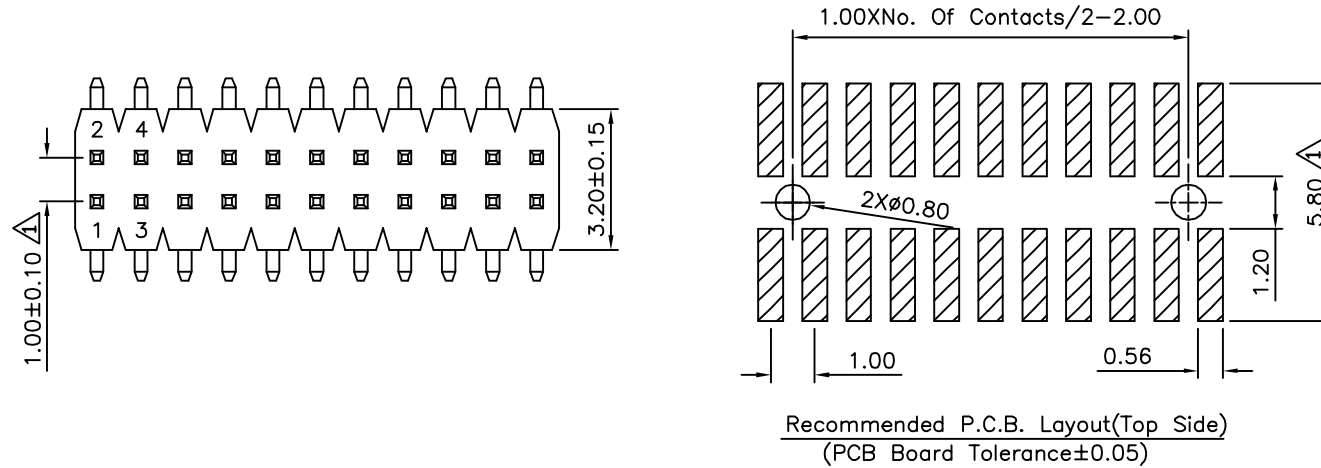

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

17241

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.40  
 .XX ±0.25  
 .XXX ±0.15  
 ANG. ±3°

UNIT mm



| NO.  | REV.         | REVISIONS | CHK        | DATE |
|------|--------------|-----------|------------|------|
| ⚠ A2 | Modify Spec. | HZF       | 11/22/2012 |      |
| ⚠ A1 | Modify Data  | HZF       | 05/04/2012 |      |
| ⚠ A0 | NEW RELEASE  | HZF       | 06/09/2010 |      |