

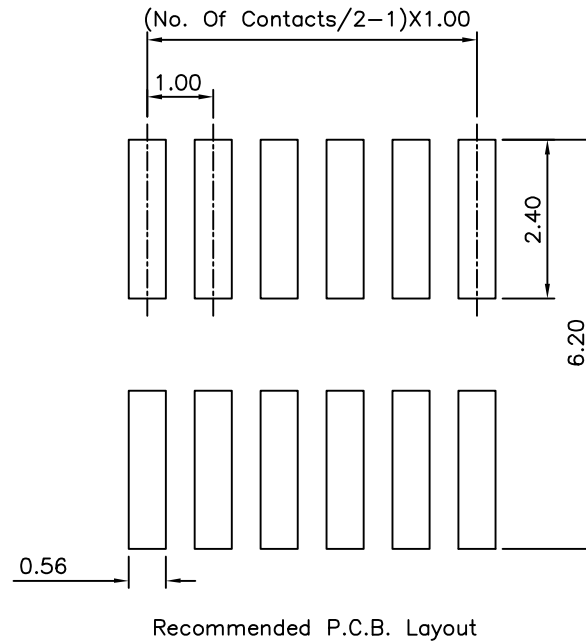
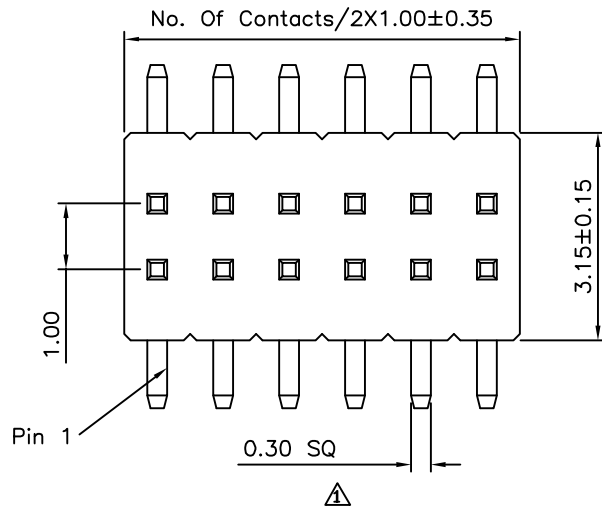


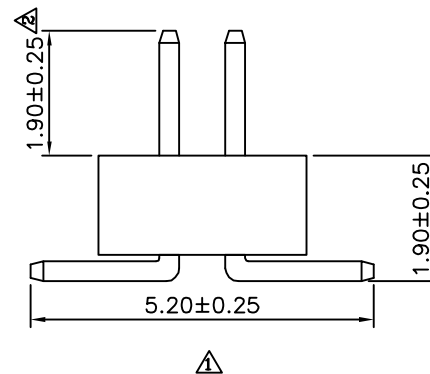

△ SPECIFICATION

Current:1A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Strength:1000V AC Minute
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

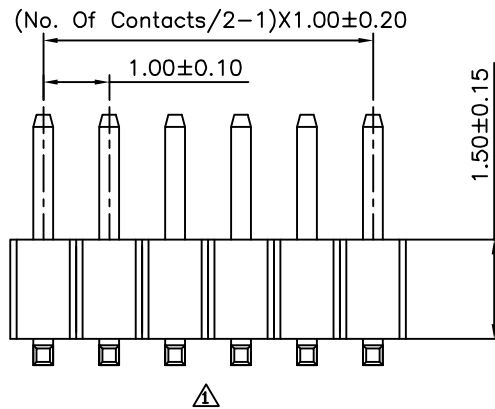

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17248

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A2


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



	A2	Modify Dim.	HZF	05/05/2012
	A1	Modify Data	HZF	03/14/2012
	A0	NEW RELEASE	HZF	06/27/2007
NO REV.	REVISIONS		CHK	DATE