
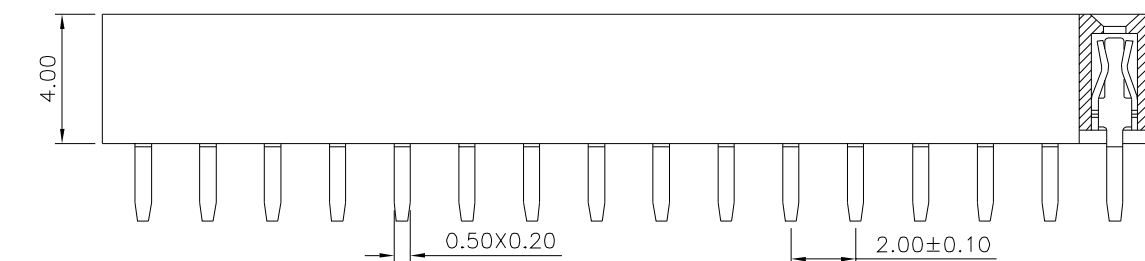



△ SPECIFICATION

Current Rating:1.5 Amp/Contact
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout

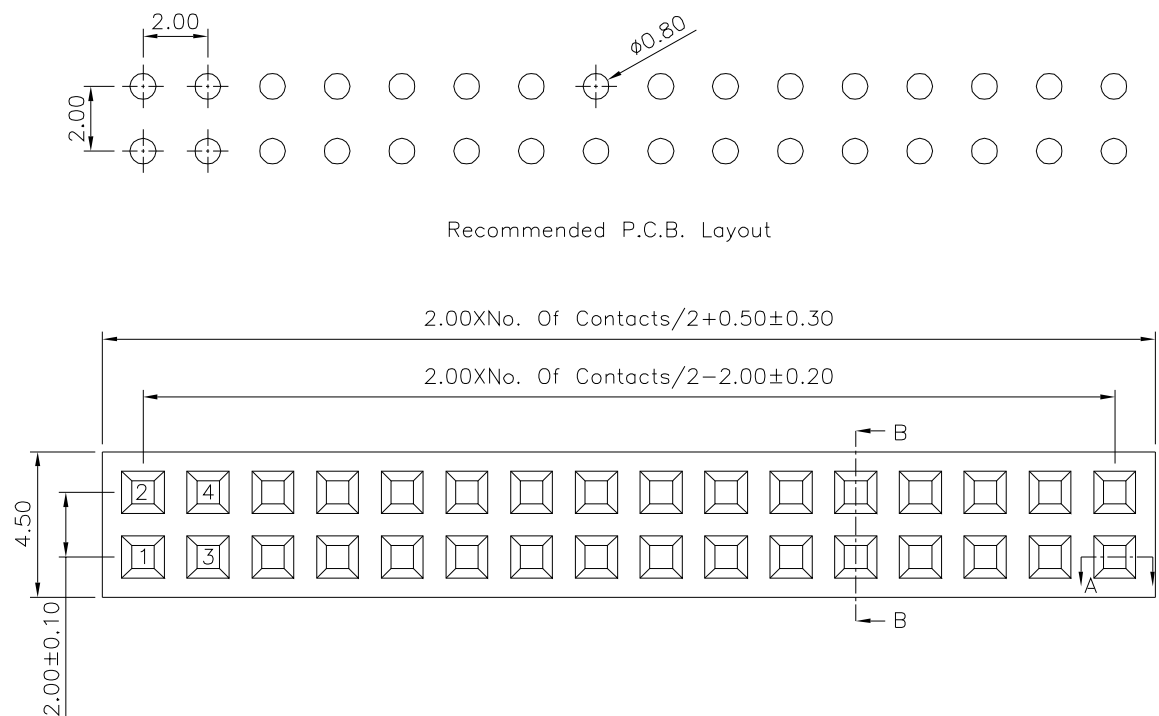

Section A-A



Section B-B

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17443

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X. ±0.50
.XX ±0.30
.XXX ±0.20
.XXX ±0.10
ANG. ±5°

UNIT
mm



SCALE

NONE

REV.

A1

NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify Data	HZF	10/16/2013
△ A0	NEW RELEASE	HZF	11/30/2011