


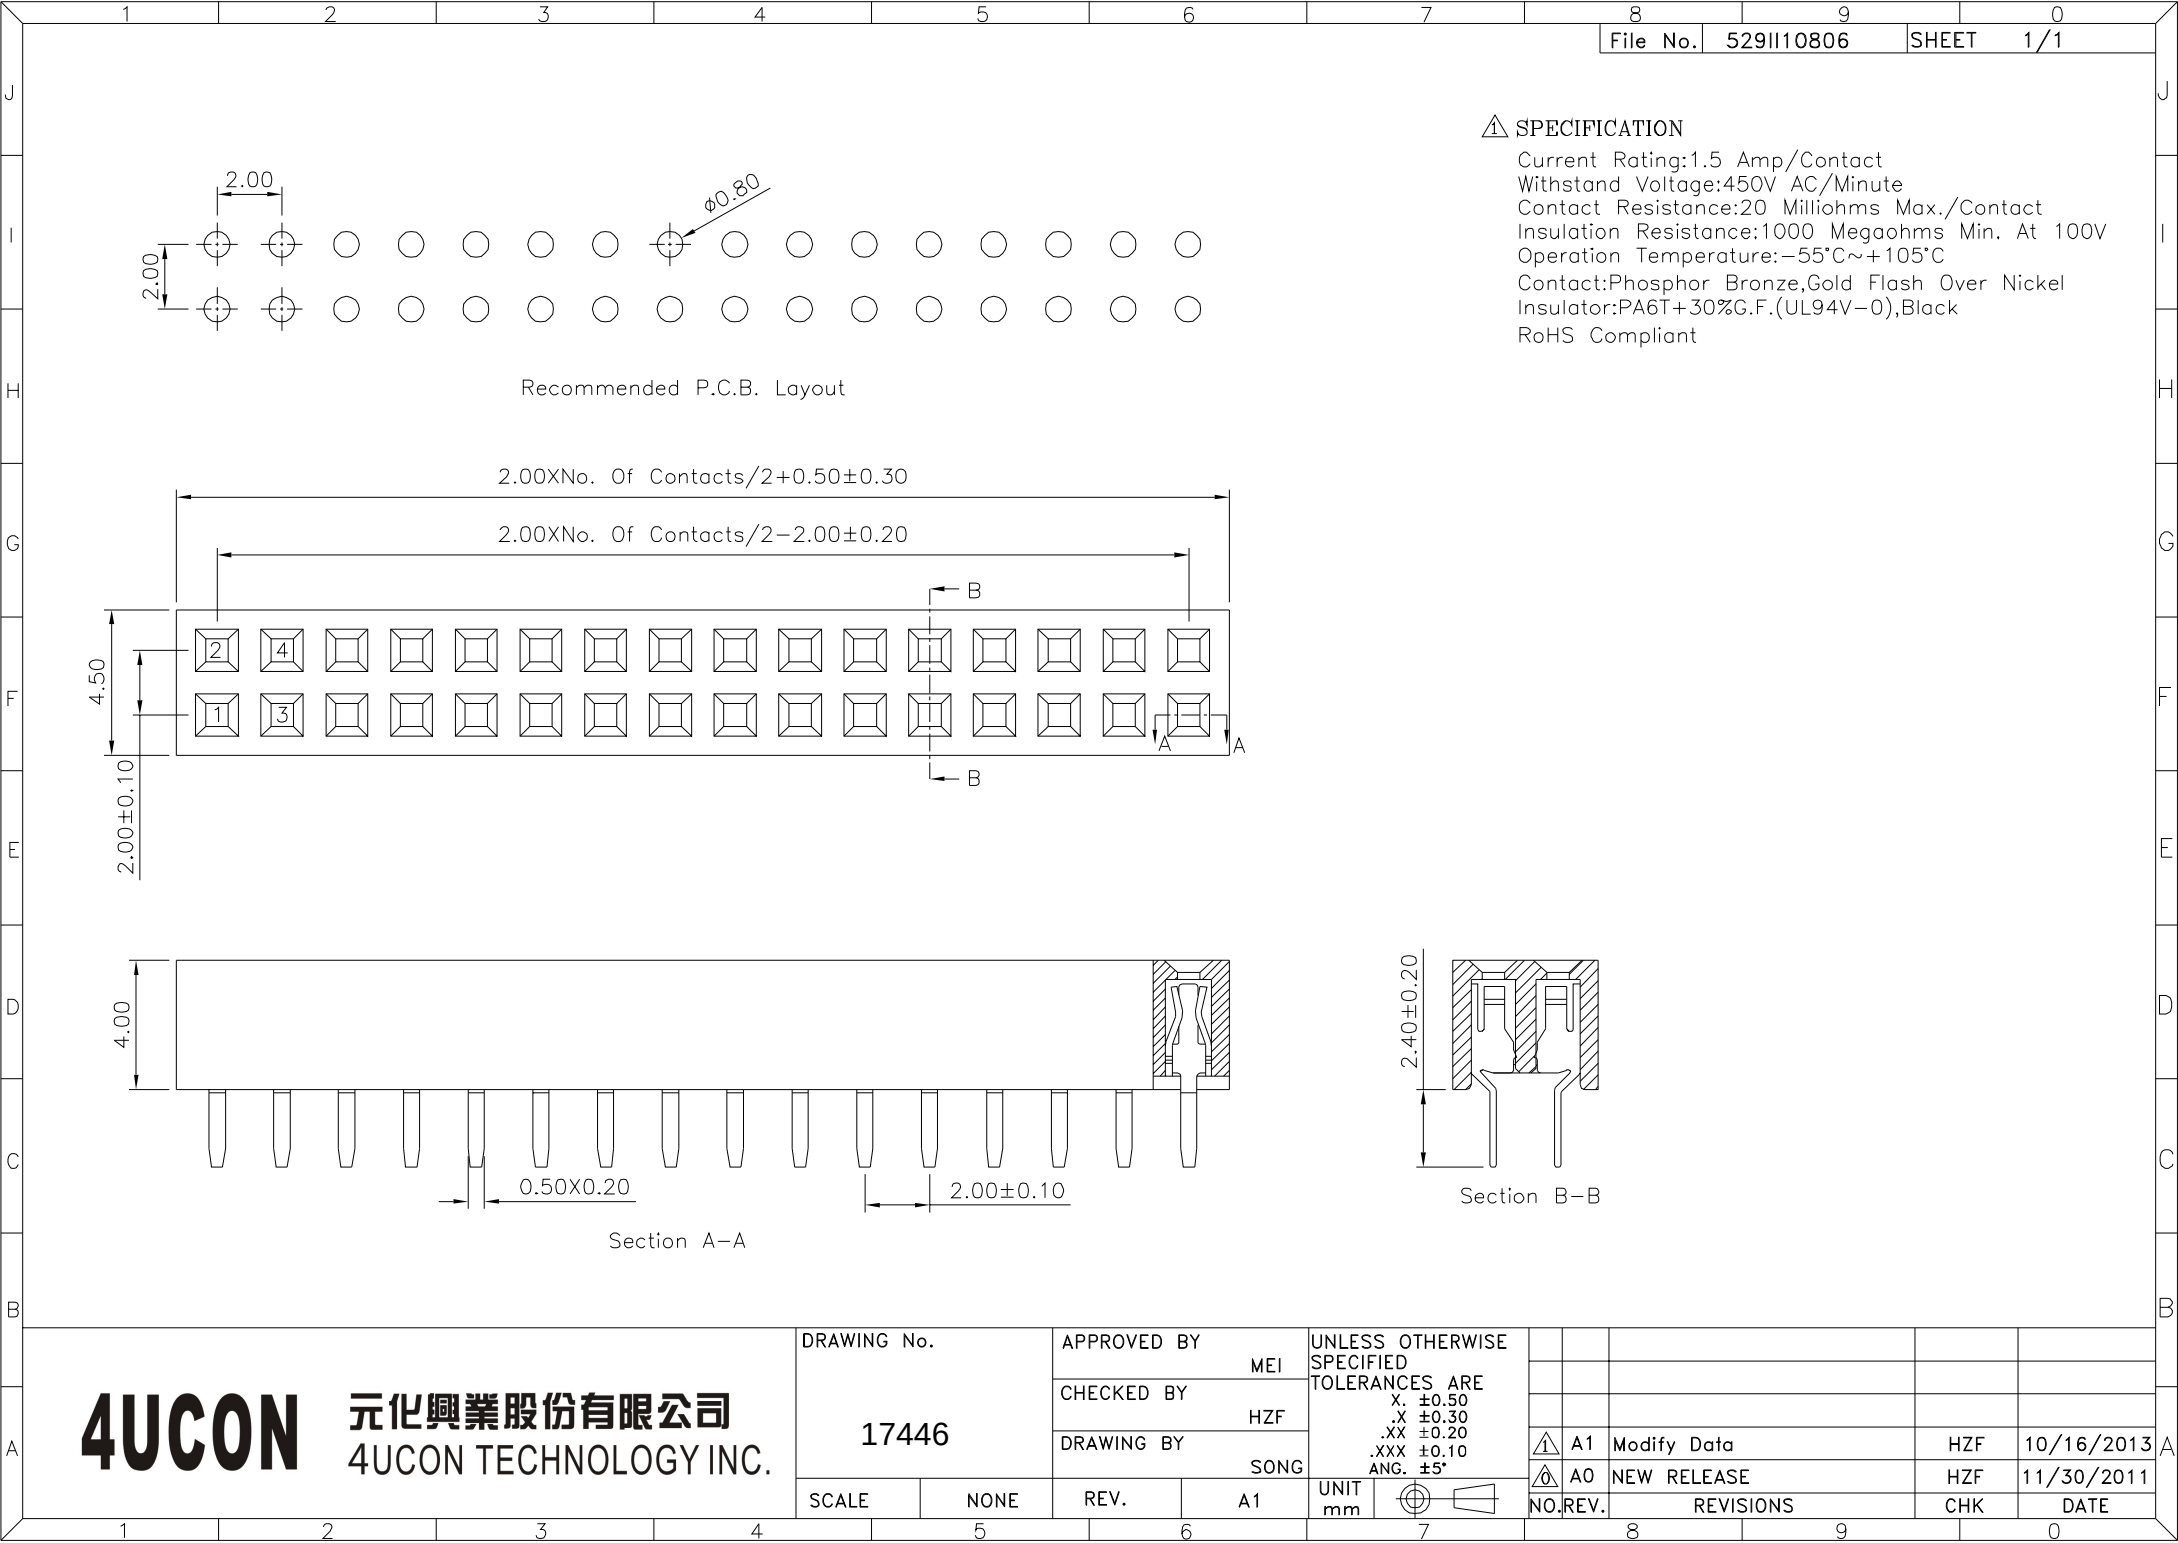

△ SPECIFICATION
Current Rating:1.5 Amp/Contact
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
17446		HZF	
		DRAWING BY	
		SONG	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^\circ$

UNIT mm

△ A1	Modify Data		HZF	10/16/2013	
△ A0	NEW RELEASE		HZF	11/30/2011	
NO. REV.	REVISIONS	CHK	DATE		