File No.	529II10806	SHEET	1/1

⚠1 SPECIFICATION

Current Rating:1.5 Amp/Contact
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:−55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V−0),Black
RoHS Compliant

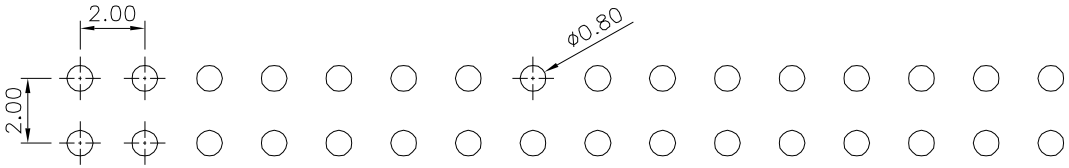

Recommended P.C.B. Layout

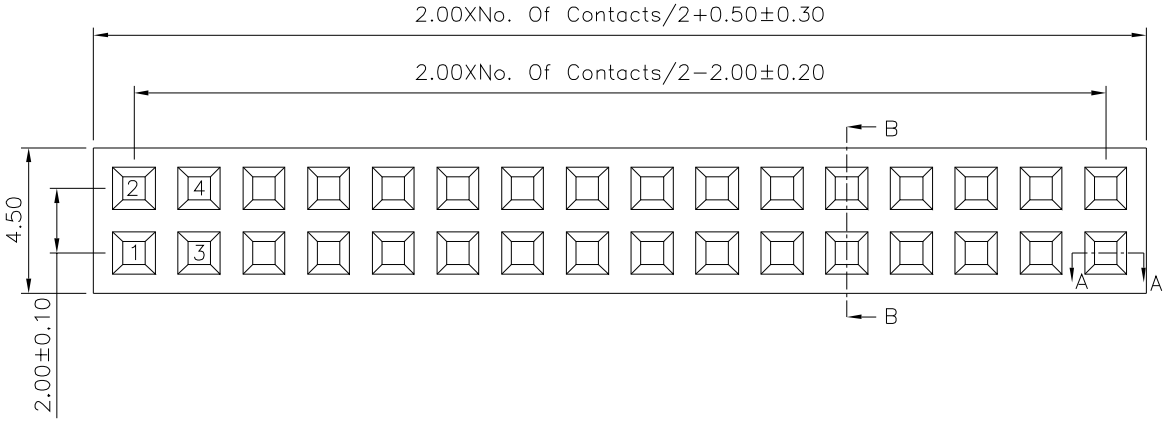

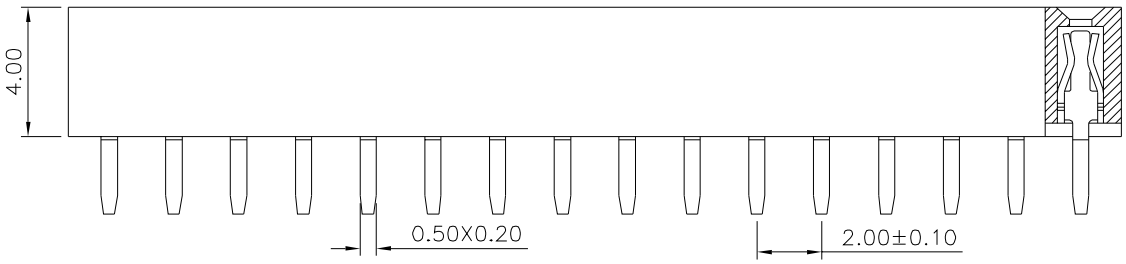

Section A−A



Section B−B

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
17453	CHECKED BY HZF	
	DRAWING BY SONG	
SCALE NONE	REV. A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	10/16/2013
0	A0	NEW RELEASE	HZF	11/30/2011