
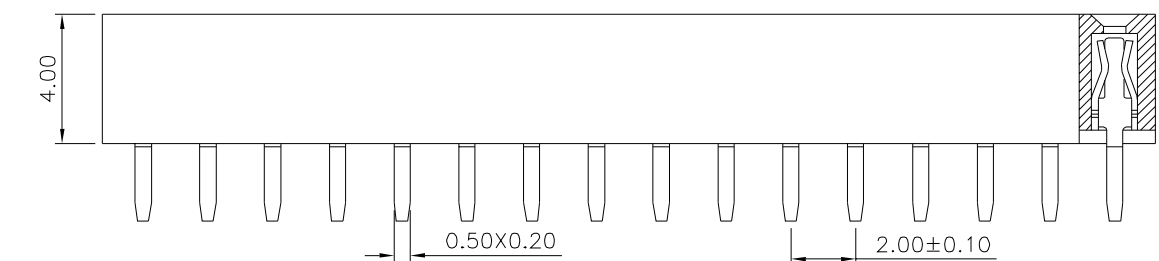



# △ SPECIFICATION

Current Rating:1.5 Amp/Contact  
 Withstand Voltage:450V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

Recommended P.C.B. Layout

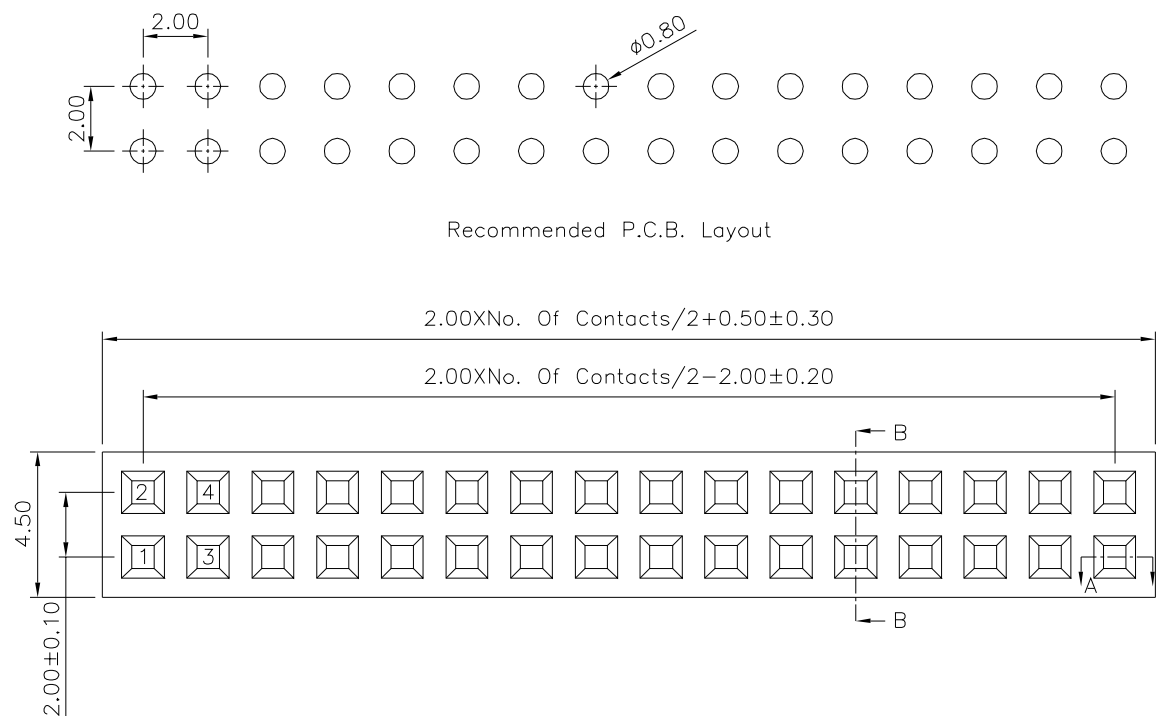

Section A-A



Section B-B

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

17458

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A1

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±5°

UNIT  
 mm



|          |             |     |            |  |
|----------|-------------|-----|------------|--|
|          |             |     |            |  |
|          |             |     |            |  |
|          |             |     |            |  |
| △ A1     | Modify Data | HZF | 10/16/2013 |  |
| △ A0     | NEW RELEASE | HZF | 11/30/2011 |  |
| NO. REV. | REVISIONS   | CHK | DATE       |  |