


△ SPECIFICATION

Current Rating:1.5 Amp/Contact
 Withstand Voltage:450V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

Recommended P.C.B. Layout

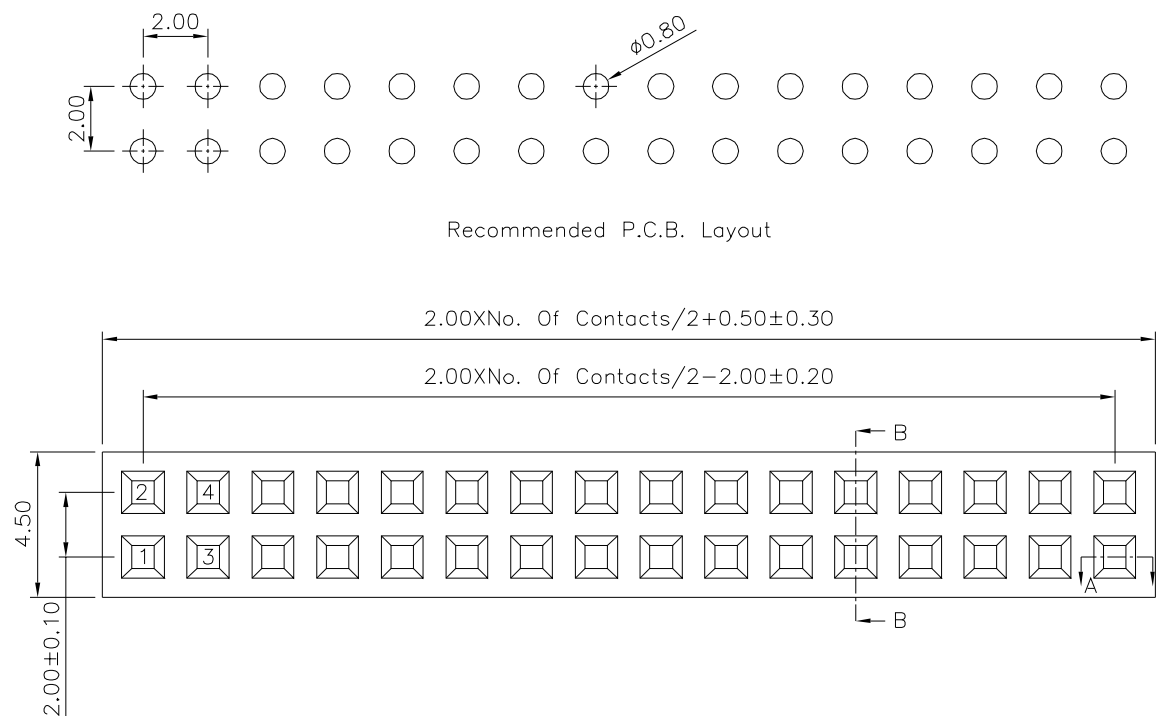

$2.00 \times \text{No. Of Contacts} / 2 + 0.50 \pm 0.30$


$2.00 \times \text{No. Of Contacts} / 2 - 2.00 \pm 0.20$

B


B

A

A

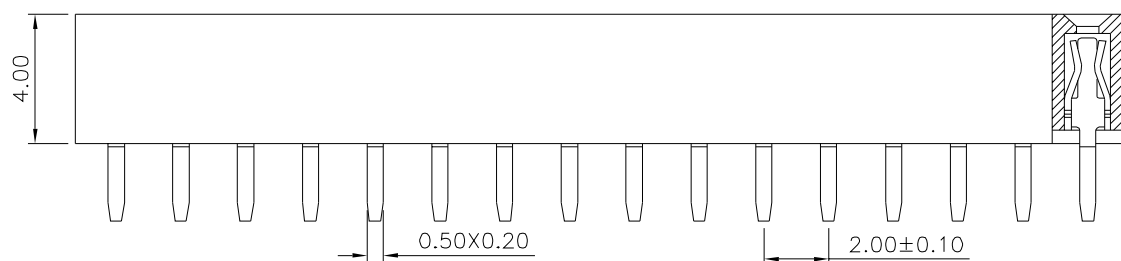

Section A-A



Section B-B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17459

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG. $\pm 5^\circ$

UNIT
 mm



SCALE

NONE

REV.

A1

NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify Data	HZF	10/16/2013
△ A0	NEW RELEASE	HZF	11/30/2011