

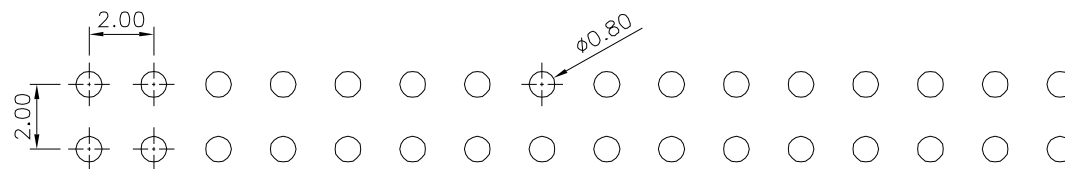


△ SPECIFICATION


Current Rating:1.5 Amp/Contact
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

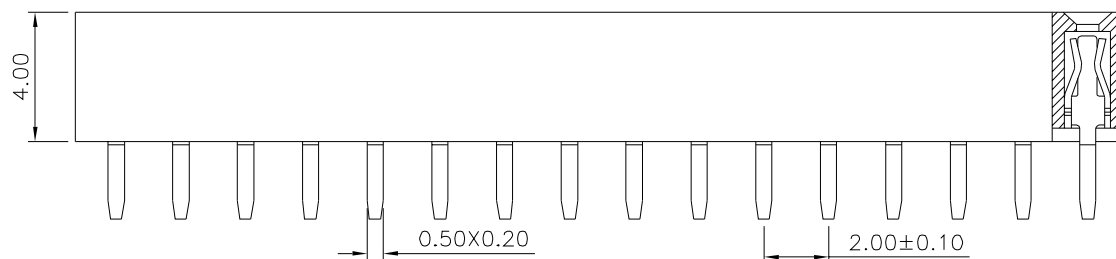

Recommended P.C.B. Layout

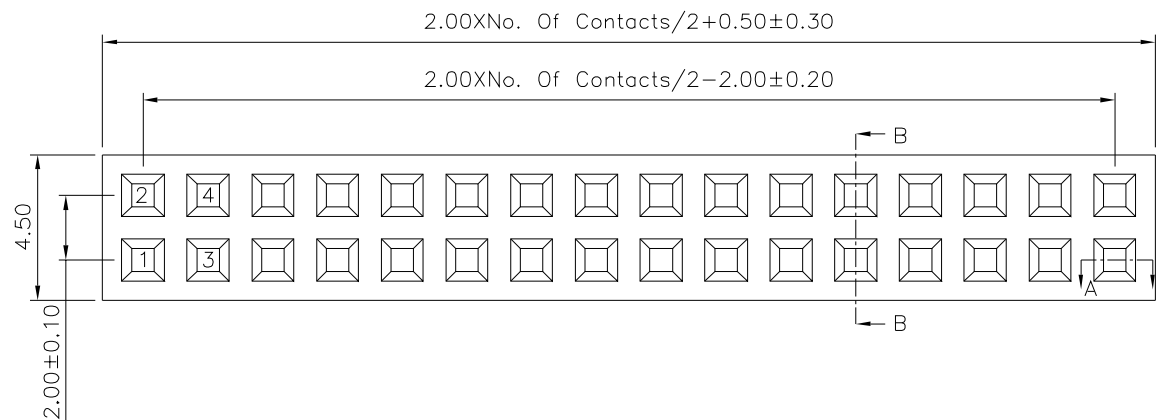

Section A-A



Section B-B

4U CON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17461

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.50
.X	± 0.30
.XX	± 0.20
.XXX	± 0.10
ANG.	$\pm 5^\circ$

UNIT	mm
------	----



$\triangle_1$	A1
---------------	----

1	Modify Data
---	-------------

	A0
--	----

NEW RELEASE

NO.	REV
-----	-----

REVISIONS

CHK

DATE _____