
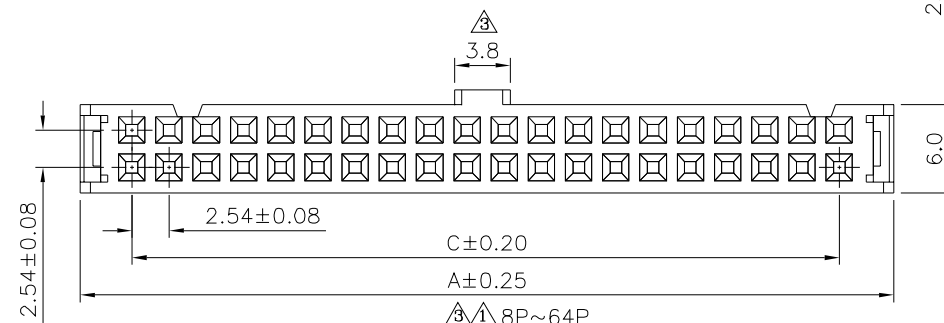
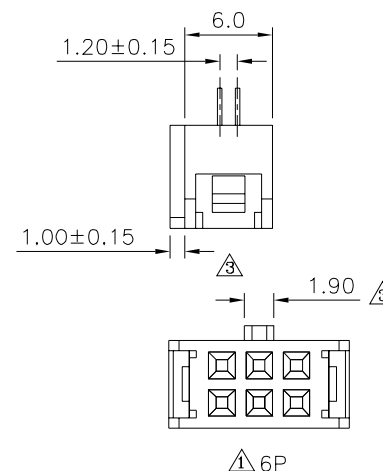
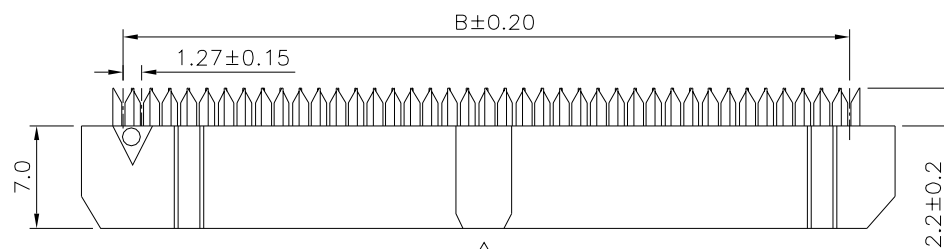



SPECIFICATION
 ③ Current Rating:1A
 Voltage Rating:250V AC/DC
 Withstanding Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-40°C~+105°C
 Insulator:PBT(UL94V-0),Black
 ② Contact:Brass,Selective Gold Plated Over Nickel
 RoHS Compliant

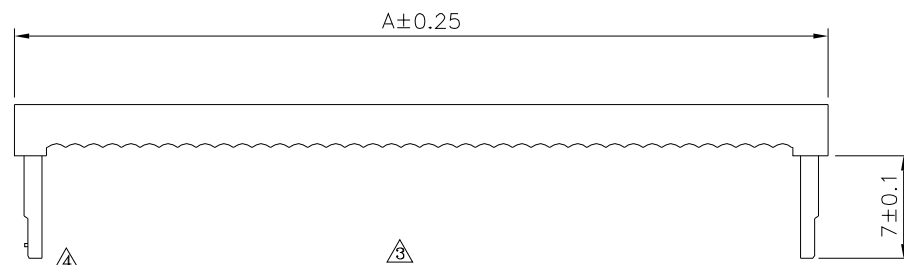

③ Pin	A	B	C
6	12.32	6.35	5.08
8	14.86	8.89	7.62
10	17.40	11.43	10.16
12	19.94	13.97	12.70
14	22.48	16.51	15.24
16	25.02	19.05	17.78
18	27.56	21.59	20.32
20	30.10	24.13	22.86
24	35.18	29.21	27.94
26	37.72	31.75	30.48
30	42.80	36.83	35.56
34	47.88	41.91	40.64
36	50.42	44.45	43.18
40	55.50	49.53	48.26
44	60.58	54.61	53.34
50	68.20	62.23	60.96
60	80.90	74.93	73.66
64	85.98	80.01	78.74

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ③

17514

SCALE NONE

APPROVED BY
 Jason Wu

CHECKED BY
 Leo Han

DRAWING BY
 Michelle Lee

REV. A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 ③ X. ±0.3
 .X ±0.2
 .XX ±0.1
 .XXX ±0.05

UNIT
 mm

NO.	REV.	REVISIONS	CHK	DATE
④	A4	Modify Data	HZF	06/26/2026
③	A3	Modify Data	HZF	05/24/2012
②	A2	Modify Data	HZF	10/06/2010
①	A1	Modify Data	HZF	08/13/2010
①	A0	NEW RELEASE	HZF	10/20/2009