
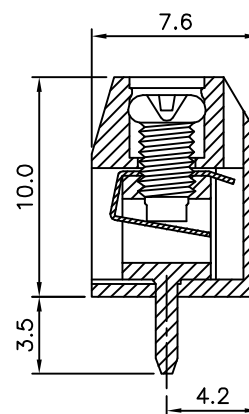
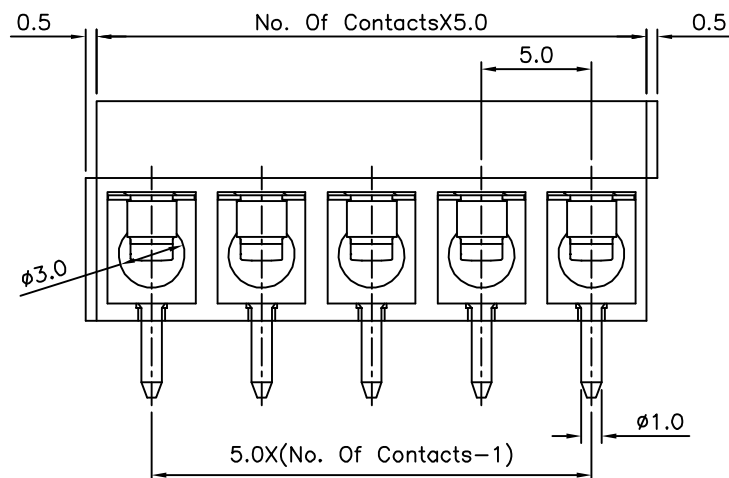


Recommended P.C.B. Layout

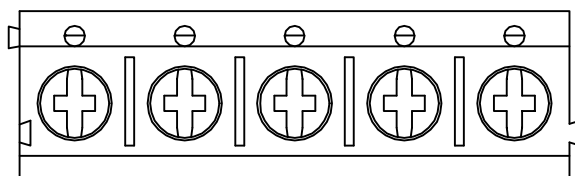

SPECIFICATION

Voltage Rating:250V AC

Current Rating:15 Amps/Way Max.

Contact Resistance:20 Milliohms Max.

Withstanding Voltage:2500V AC(1 Minute),Test Time=60s/1 PCS

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Soldering Reliability: Test Temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C}$ 5s Max.

Torque:4.0 Kgf.cm/M2.5

Wire Range:14~24 AWG

Terminal: Copper Alloy, Tin Plated

Screw: Steel, Galvanized With Cr3+ Plated

Wire Guard:Stainless Steel

Insulator Body(Housing):Polyamide(UL94V-0),Blue

RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

17597

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAC

	REV.
--	------

BO

UNLESS OTHERWISE
SPECIFIED
— TOLERANCES ARE


TOLERANCES ARE
X. ± 0.50

	λ	± 0.30
	$\cdot X$	± 0.30

XX	±0.20
----	-------

ANG.	$\pm 1^\circ$
------	---------------

UNIT



		BO
--	---	----

NO	REV
----	-----

NEW RELEASE

NEW RELEASE
REVISIONS

HZF

CHK

11/05/2015

DATE	11/03/20
------	----------