

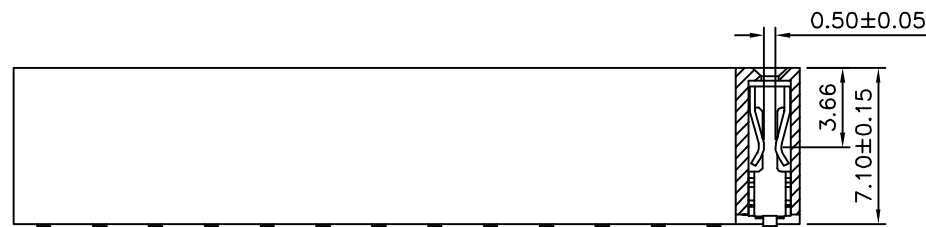


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

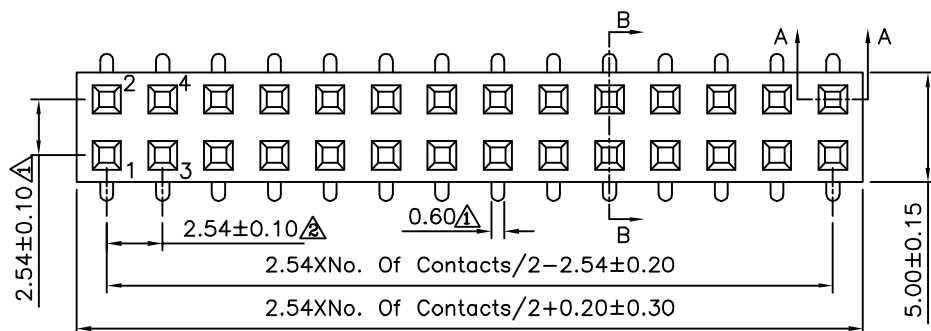

Section A-A



Section B-B

△ SPECIFICATION

Rated Current:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17651

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ± 0.40
△ .XX ± 0.25
△ .XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



A3	Modify Data	HZF	08/09/2012	
A2	Modify 2.54±1.10-->2.54±0.10	HZF	10/17/2011	
A1	Modify Data	HZF	01/16/2010	
A0	NEW RELEASE	BECKY	04/11/2005	
NO. REV.	REVISIONS	CHK.	DATE	