
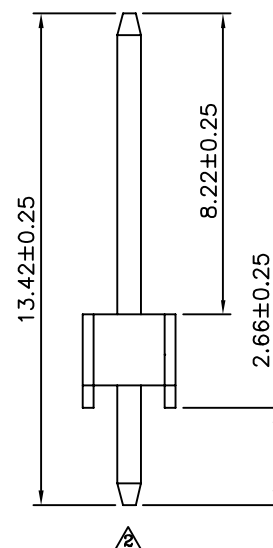
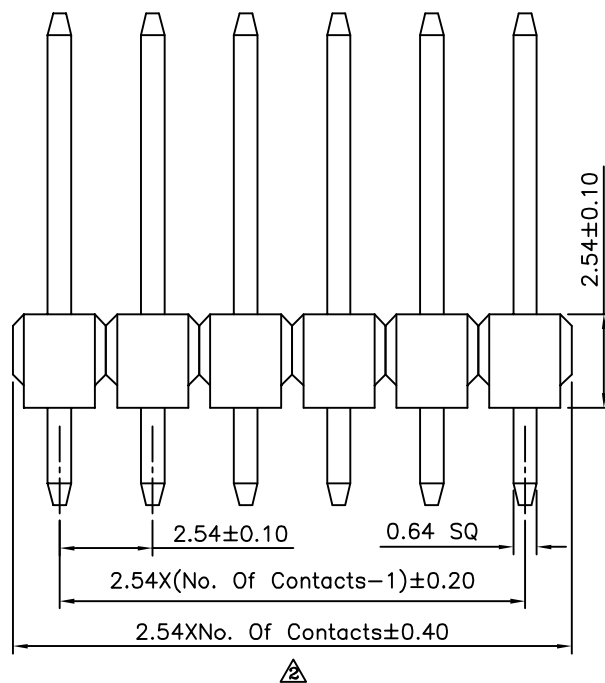


Recommended P.C.B Layout

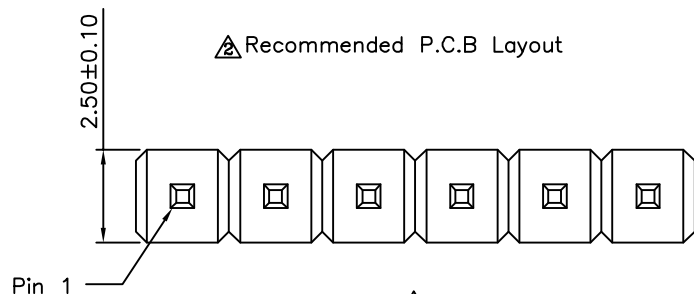

SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17691

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG. $\pm 5^\circ$

UNIT
 mm



NO.

REV.

NO.

REV.

A3

A2

A1

A0

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

HZF

HZF

HZF

SHIN

08/28/2015

09/07/2012

11/13/2008

03/14/2006

DATE