

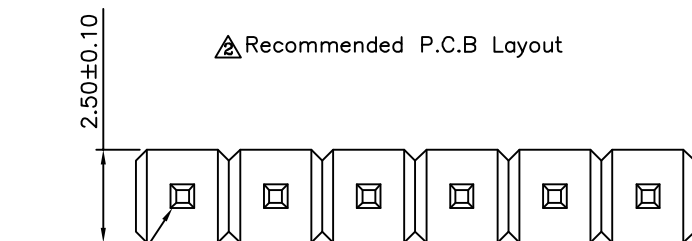


2 Recommended P.C.B Layout

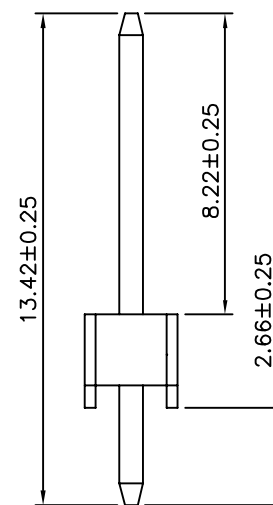

Pin 1

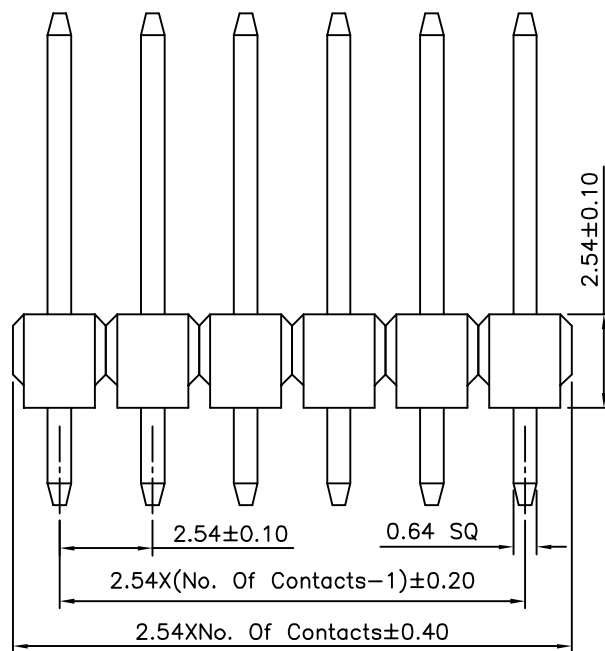

2 SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
A Insulator:PBT+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

17703

SCALE	NONE
-------	------

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

 $\Delta x \pm 0.38$ $\Delta_{XX} \pm 0.25$

ANG. $\pm 5^\circ$

UNIT	
------	---

Δ	Δ'

3	Modify Data

1175

08 / 08 / 2015

	A.
	B.

3	Modality Data
6	

08/28/2013	

2 **A3**

2 | Modify Data

HZF

09/07/2012

1	A
---	---

1	Modify Data
---	-------------

HZF

11/13/2008

	NEW RELEASES
--	--------------

SHIN

03 / 14 / 2006

	△	AV
	NO	RE

NEW RELEASES
REVIEWS

CHK

03/14/2006
DATE