
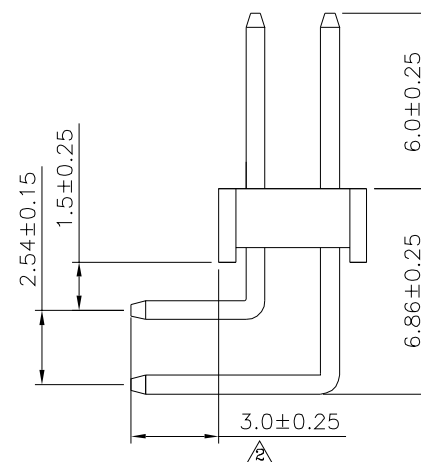
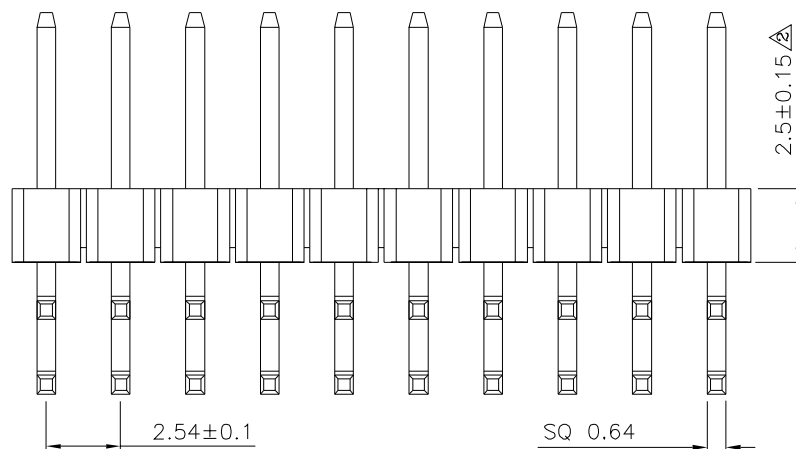


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

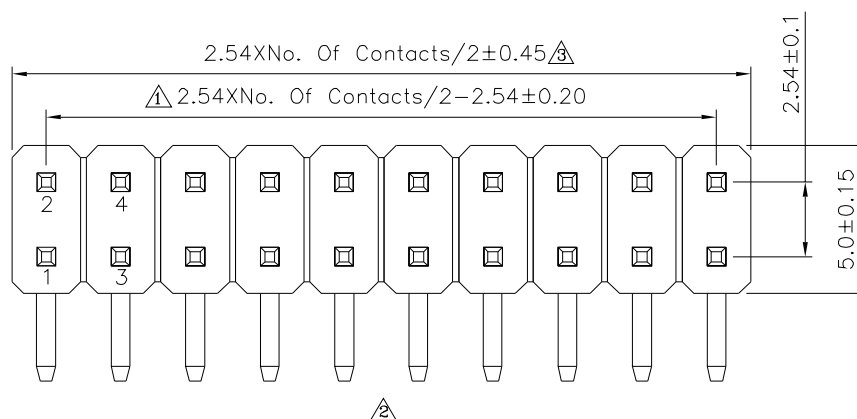

SPECIFICATION
Current Rating:3 Amp
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PBT(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17748

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X. ± 0.25 X.* $\pm 2^*$
.X ± 0.20 .X* $\pm 1.5^*$
.XX ± 0.15 .XX* $\pm 1^*$
.XXX ± 0.10 .XXX* $\pm 0.5^*$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	01/06/2017
2	A2	Modify Data	HZF	07/09/2015
1	A1	Modify Data	HZF	02/22/2011
0	A0	NEW RELEASE	HZF	12/09/2009