

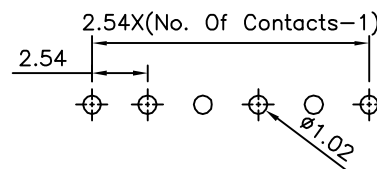
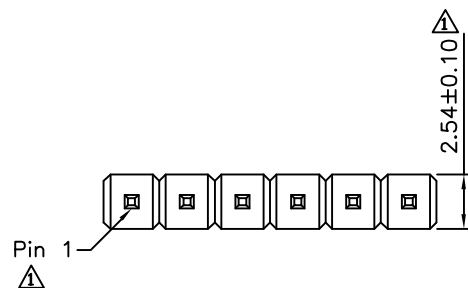


△ SPECIFICATION

Current:3A
 Withstand Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

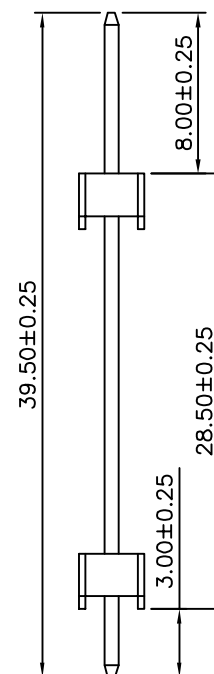

Recommended P.C.B. Layout

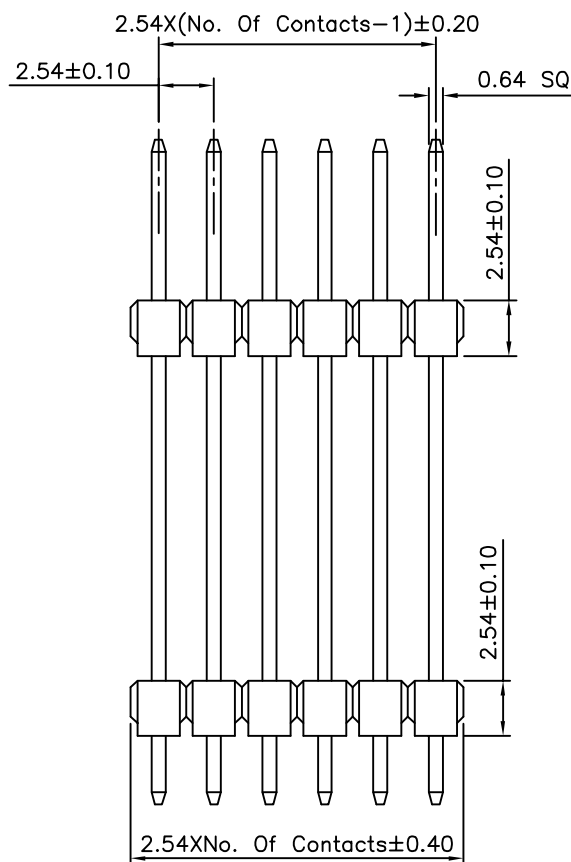

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17750

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

08/23/2012

△ A0

NEW RELEASE

HZF

03/24/2008