
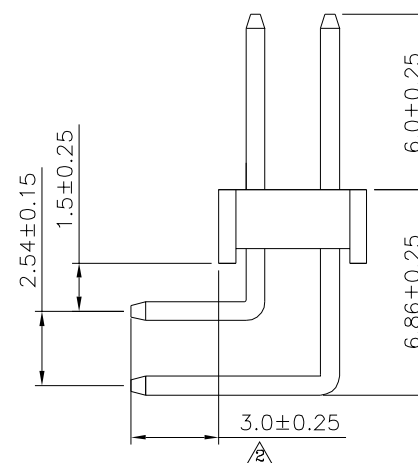
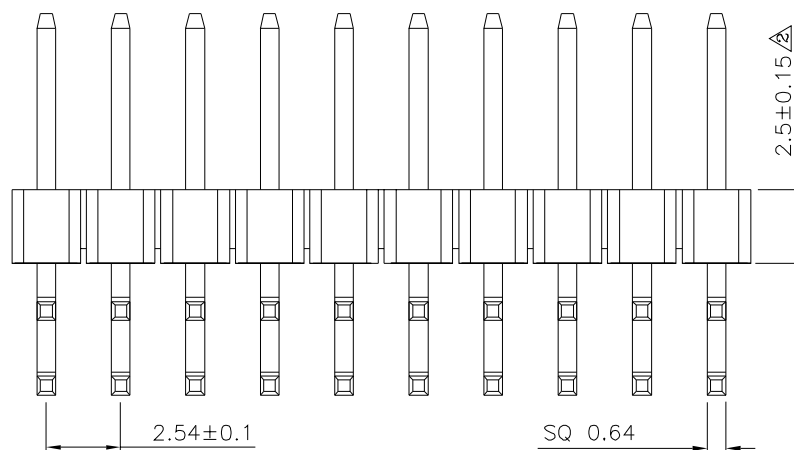


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

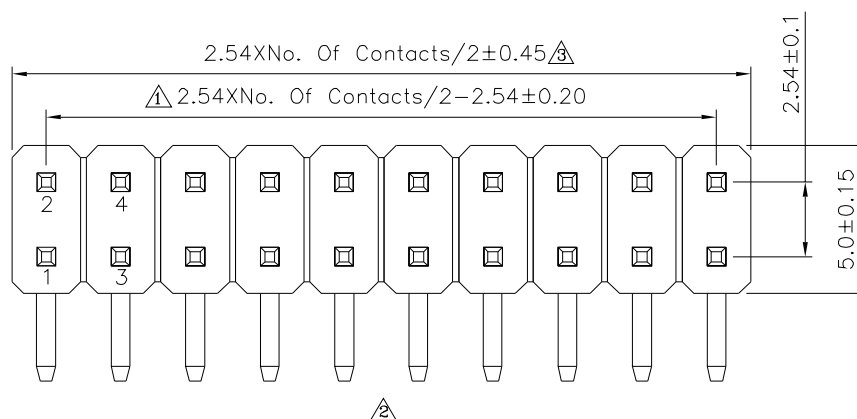

SPECIFICATION
 Current Rating: 3 Amp
 Withstanding Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PBT(UL94V-0), Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17752

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

ΔX ± 0.25 X^* $\pm 2^*$
 $.X$ ± 0.20 $.X^*$ $\pm 1.5^*$
 $.XX$ ± 0.15 $.XX^*$ $\pm 1^*$
 $.XXX$ ± 0.10 $.XXX^*$ $\pm 0.5^*$

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
	A3	Modify Data	HZF	01/06/2017
	A2	Modify Data	HZF	07/09/2015
	A1	Modify Data	HZF	02/22/2011
	A0	NEW RELEASE	HZF	12/09/2009