


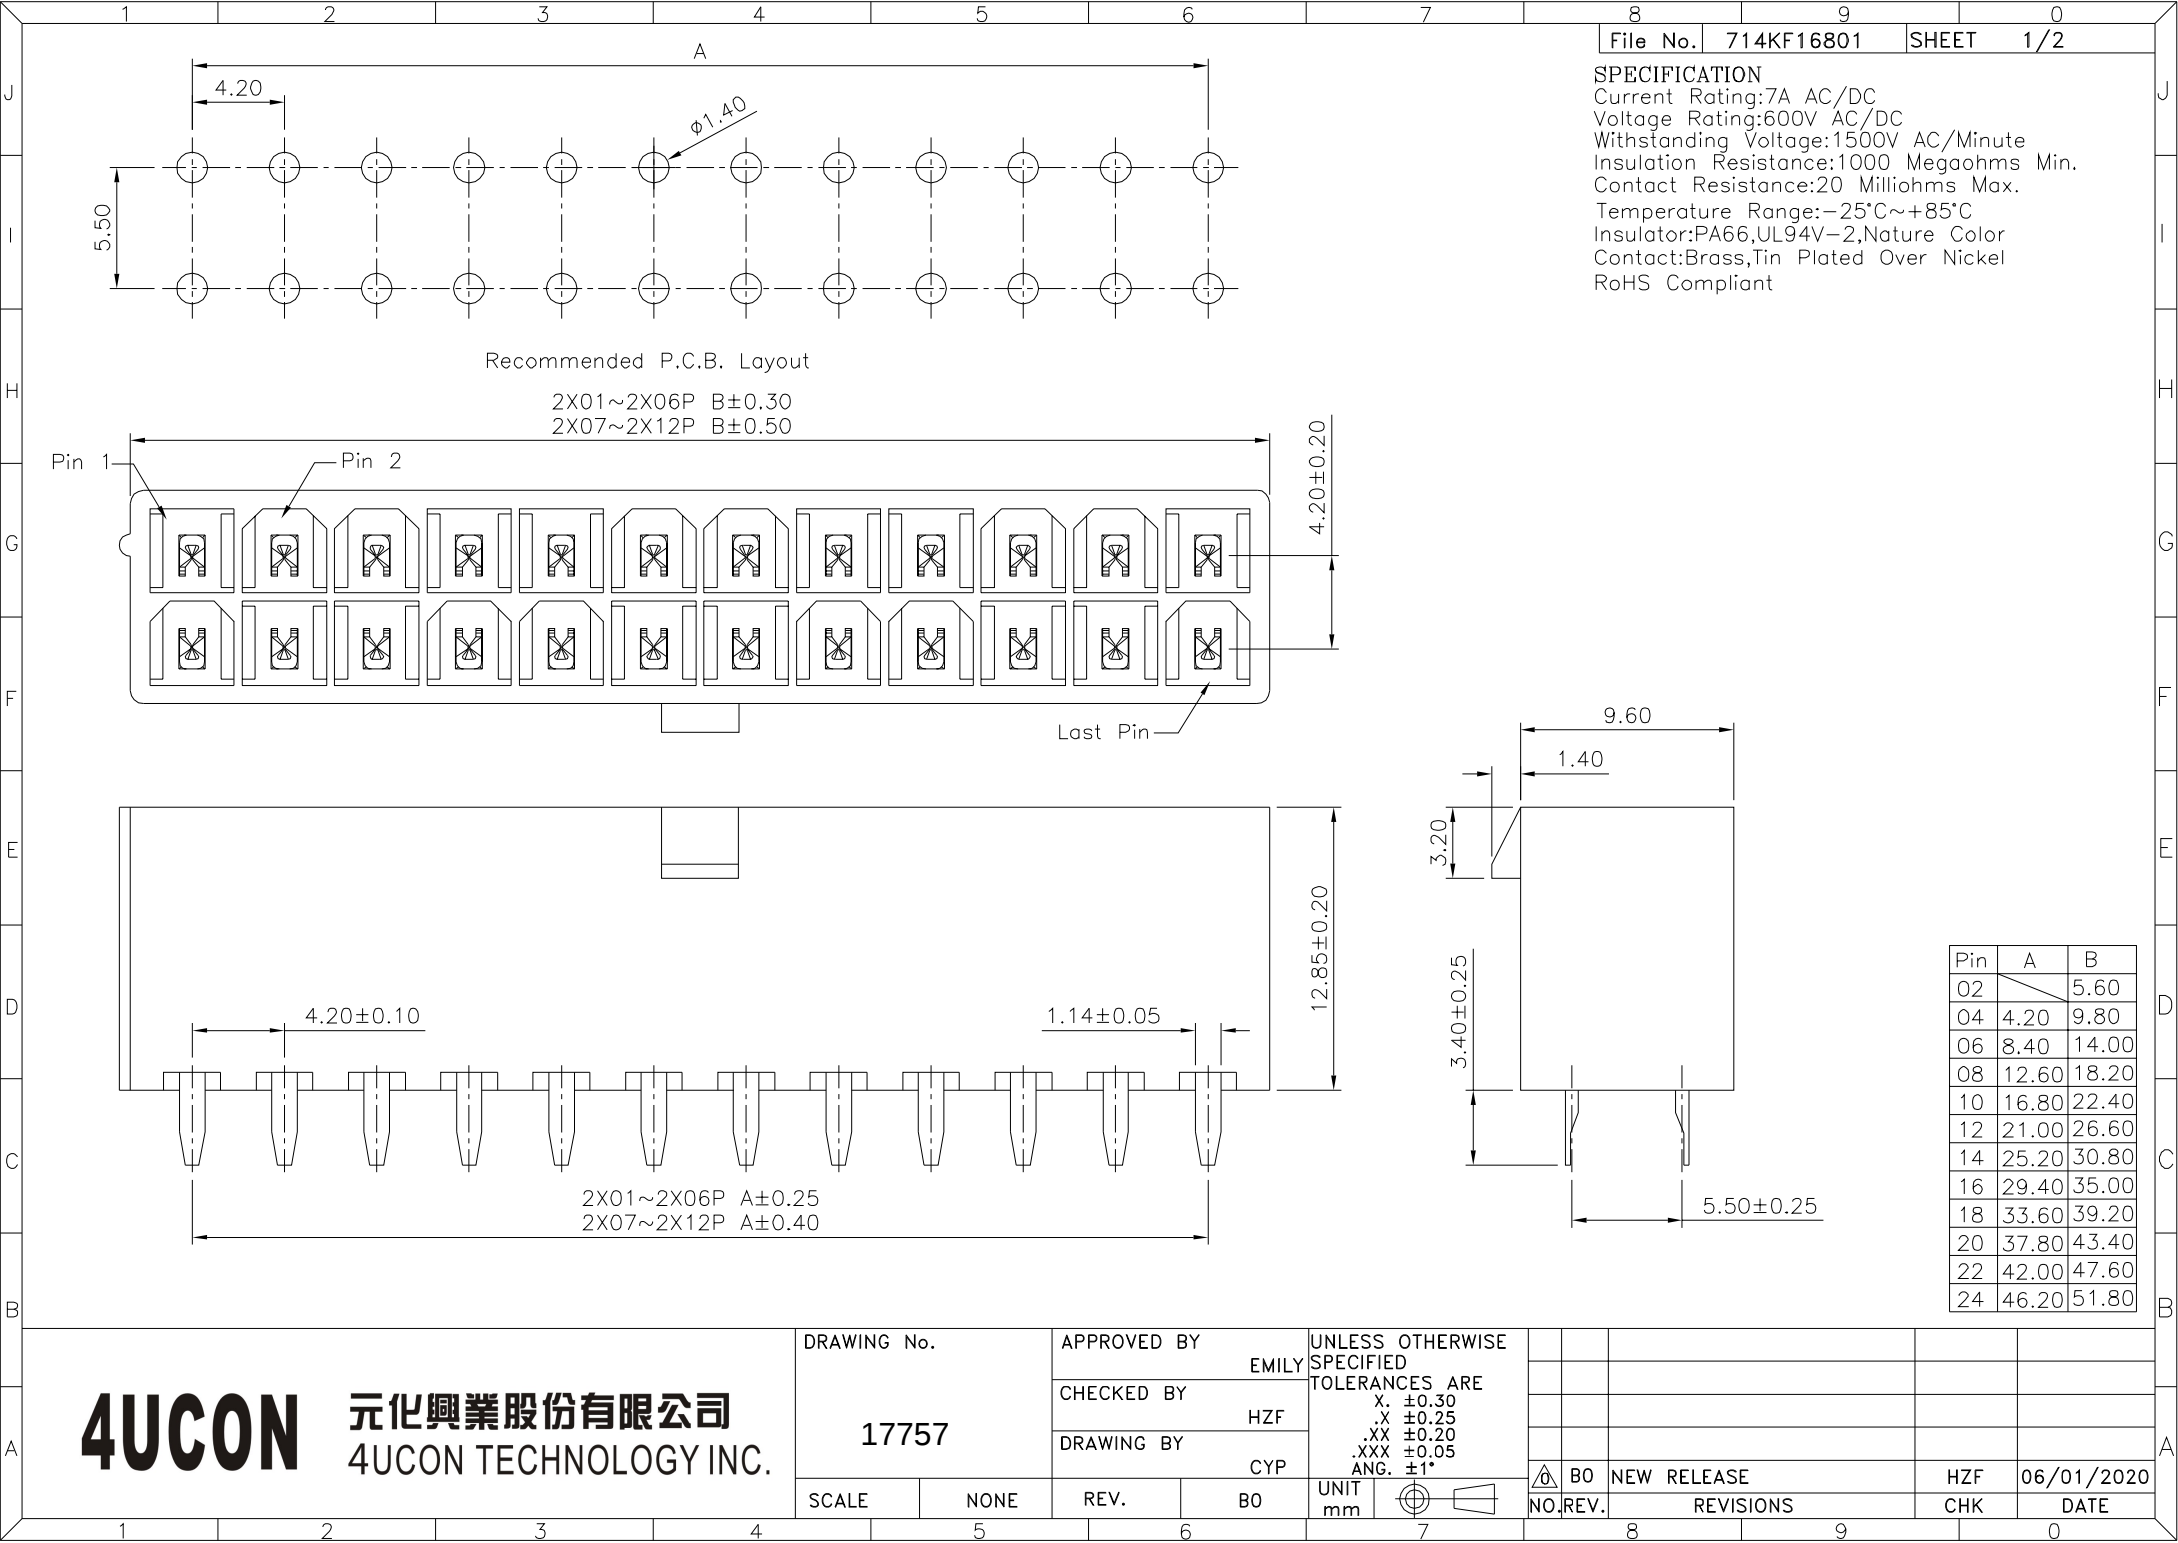


SPECIFICATION
Current Rating:7A AC/DC
Voltage Rating:600V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Temperature Range:-25°C~+85°C
Insulator:PA66,UL94V-2,Nature Color
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant


Pin	A	B
02		5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.


DRAWING No. 17757			APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°						
			EMILY								
			CHECKED BY								
			HZF								
			DRAWING BY								
			CYP								
SCALE	NONE	REV.	BO	UNIT			BO	NEW RELEASE	HZF	06/01/2020	
				mm			NO.	REV.	REVISIONS	CHK	DATE
	5		6		7		8		9		0

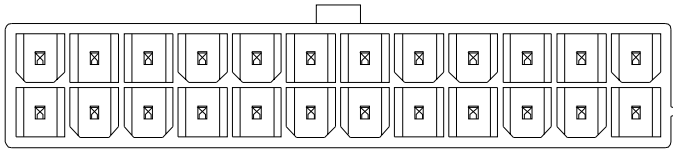


2X12P

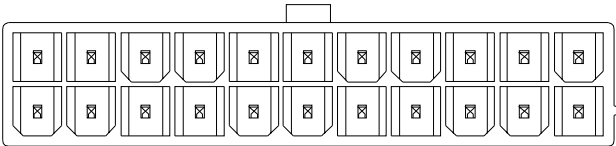


2X11P

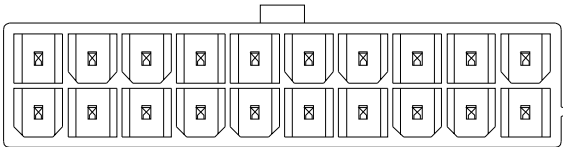


2X10P

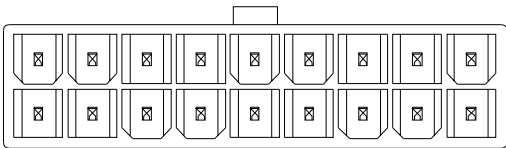


2X9P

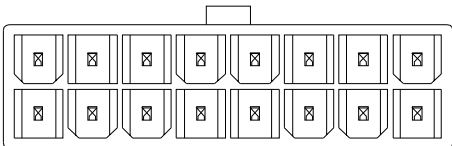


2X8P

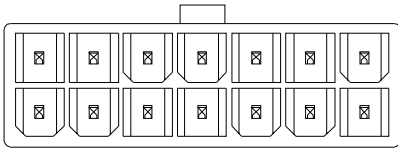


2X7P




2X6P




2X5P




2X4P



2X3P



2X2P



2X01P

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 17757		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°							
		CHECKED BY HZF									
		DRAWING BY CYP									
SCALE	NONE	REV.	BO	UNIT mm				BO	NEW RELEASE	HZF	06/01/2020
						NO. REV.		REVISIONS	CHK	DATE	