


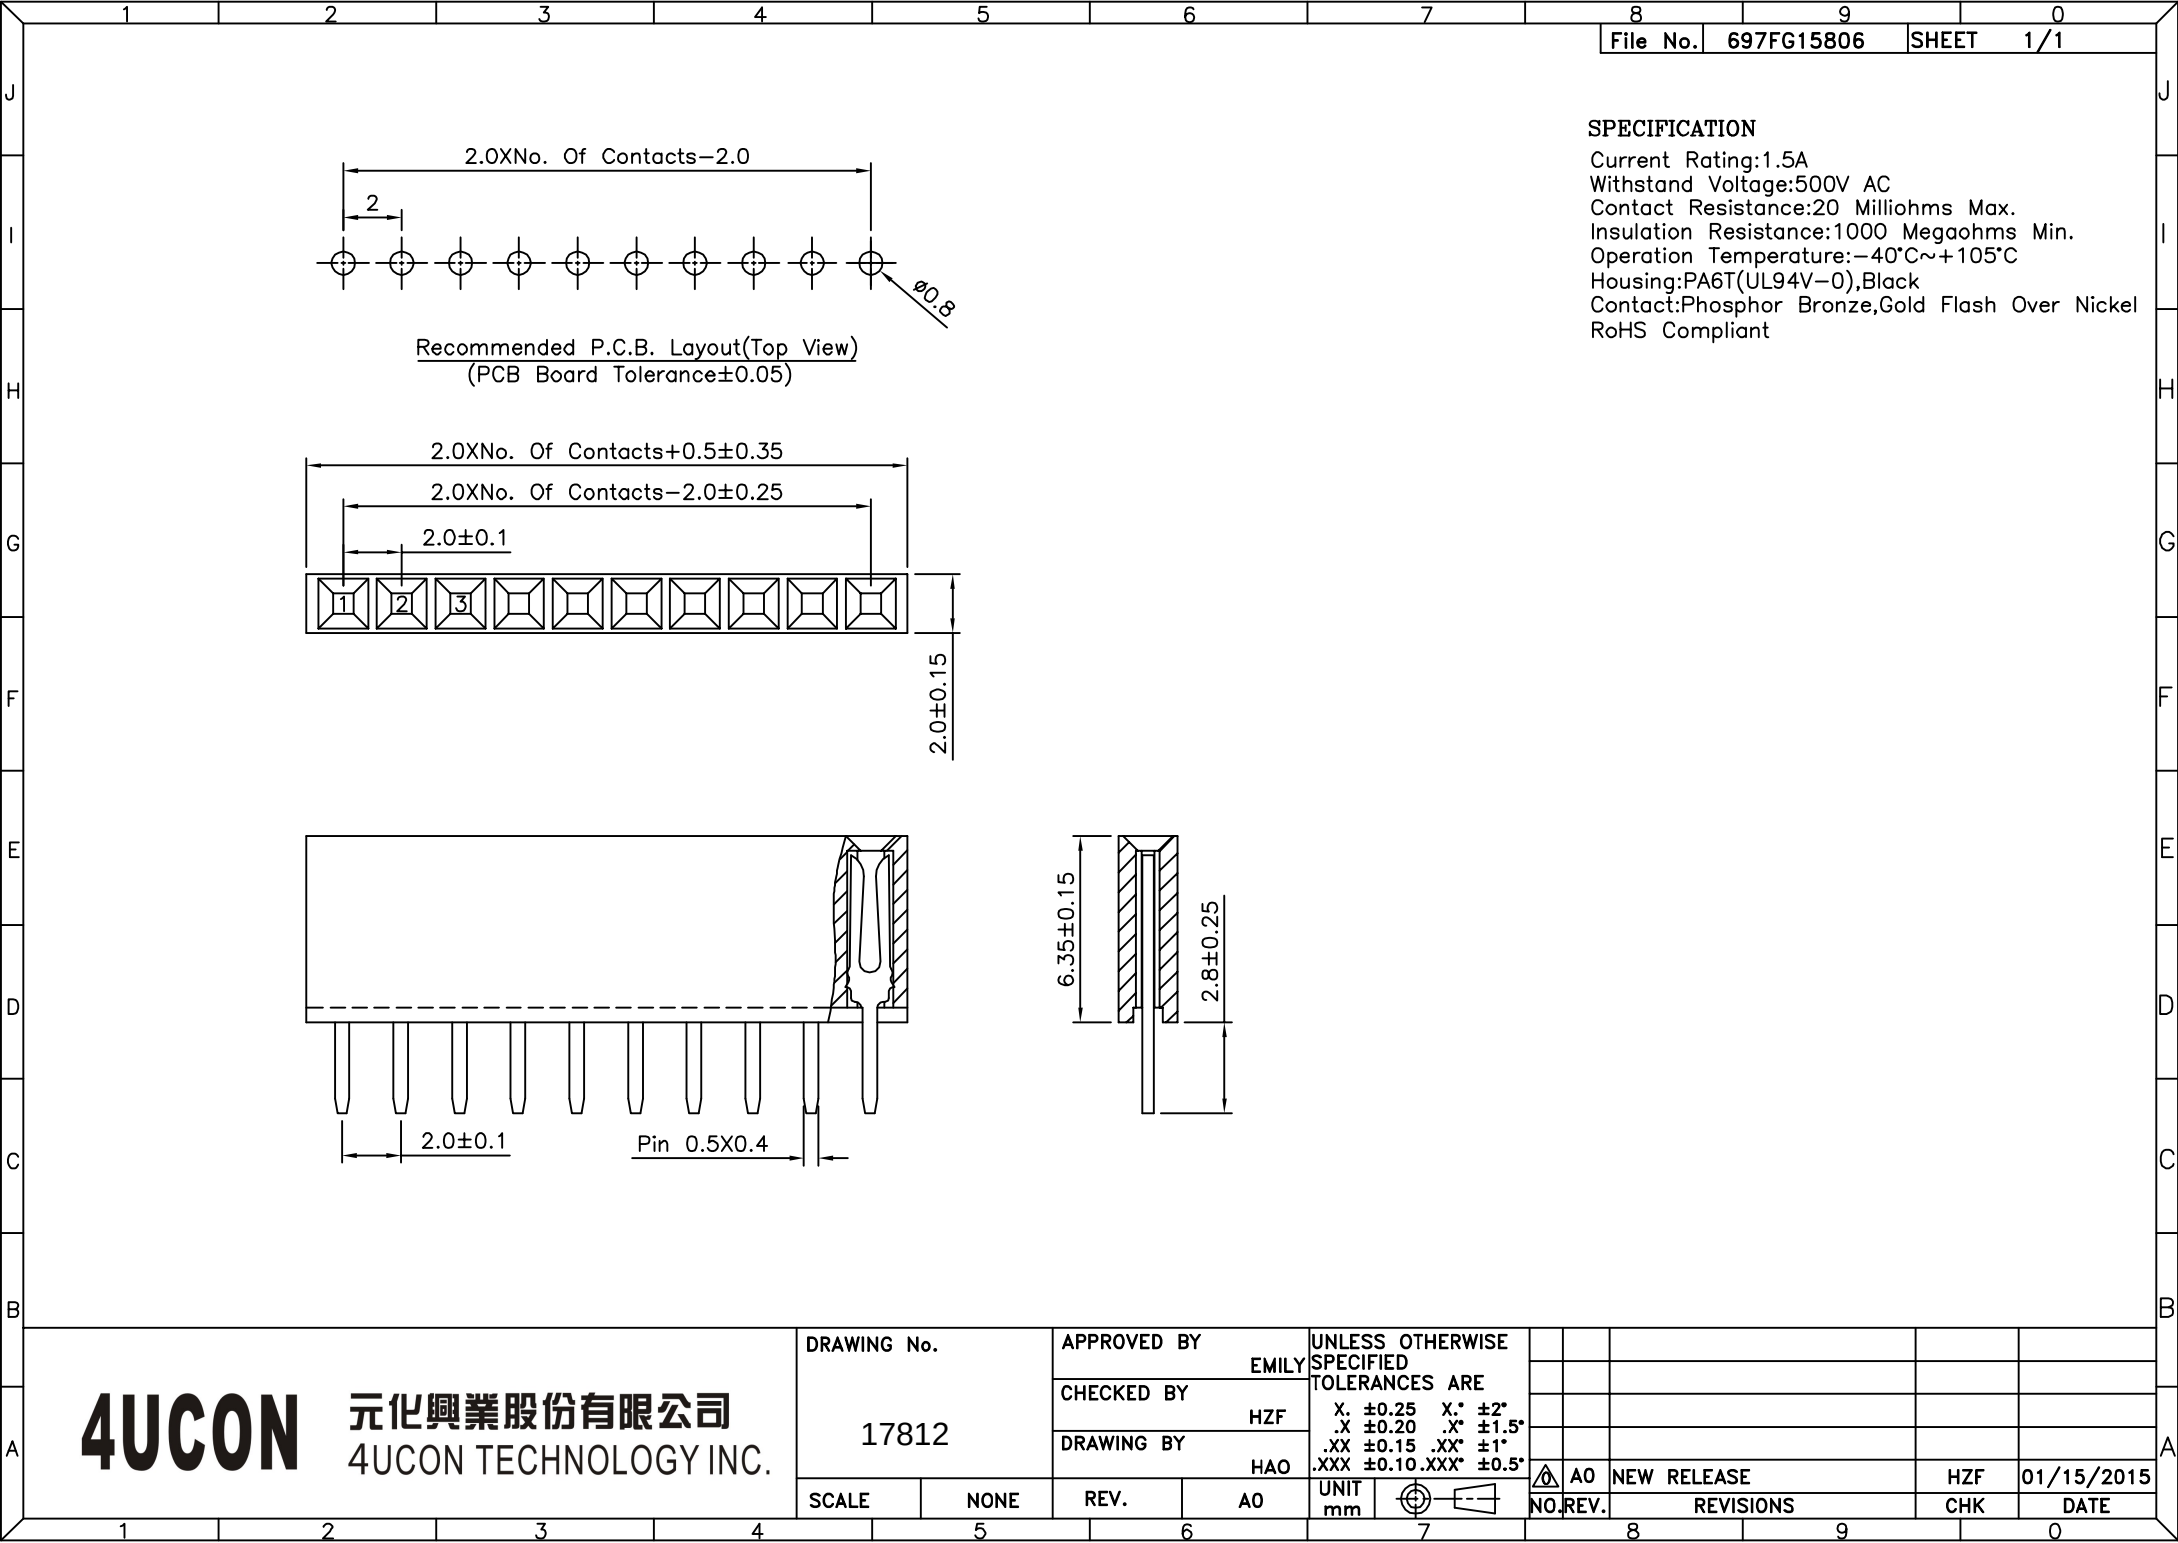

SPECIFICATION
Current Rating:1.5A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 17812		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY HAO	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°
UNIT	mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	01/15/2015