




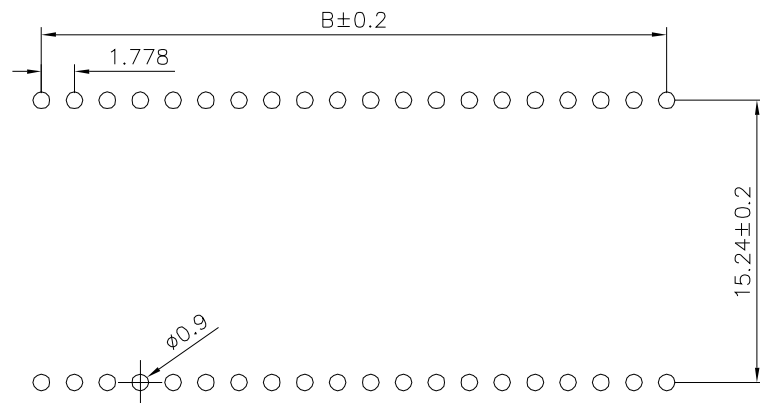

1 Recommended P.C.B. Layout

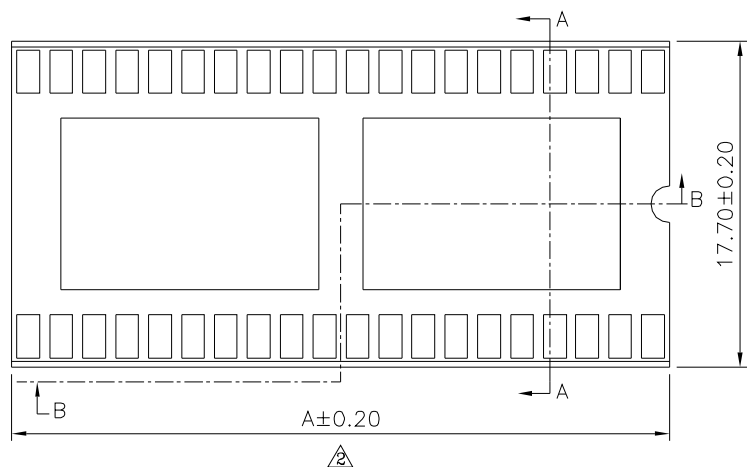

2 Section B-B

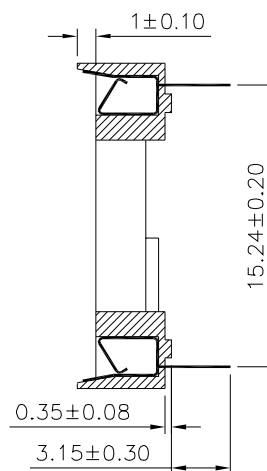

3 Section A-A

4 SPECIFICATION

Current Rating:1A
 Dielectric Withstanding Voltage:1000V RMS/Minute
 Insulator Resistance:5000 Megaohms Min.
 Operating Temperature:−55°C To 85°C
 Contact Resistance:20 Milliohms initial.
 30 Milliohms After Test.
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 Insulator:PBT(UL94V−0)
 RoHS Compliant

Pin	A	B
40	35.56	33.78
42	37.34	35.56
48	42.67	40.89
52	46.23	44.45
54	48.01	46.23
56	49.78	48.01
58	51.56	49.78
60	53.34	51.56
62	55.12	53.34
64	56.90	55.12

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17882

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
1	A2	Modify Data	HZF	02/07/2017
2	A1	Modify Data	SHIN	08/31/2006
3	A0	NEW RELEASE	BECKY	07/19/2004