



△ SPECIFICATION


Current Rating:1A Max.
Dielectric Withstanding Voltage:500V AC
For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
Housing:PBT(UL94V-0),Black
△ Contact:Brass,Gold Flash Over Nickel
① Front Shell:Steel,Nickel Plated
Back Shell:Steel,Tin Plated
RoHS Compliant

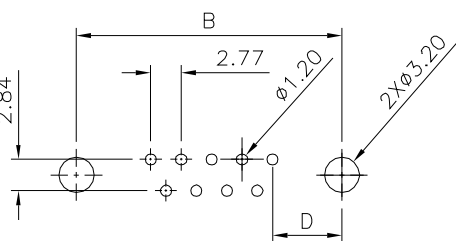


△ Recommended P.C.B. Layout

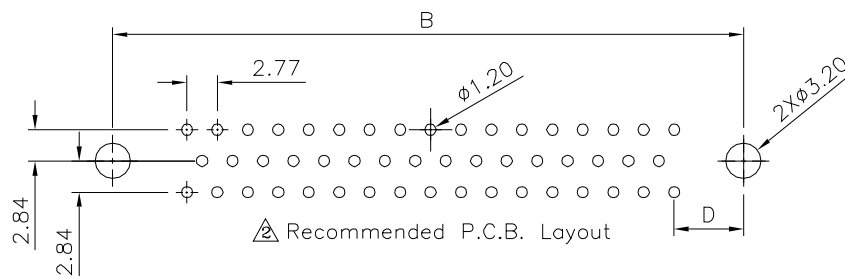





△ Recommended P.C.B. Layout

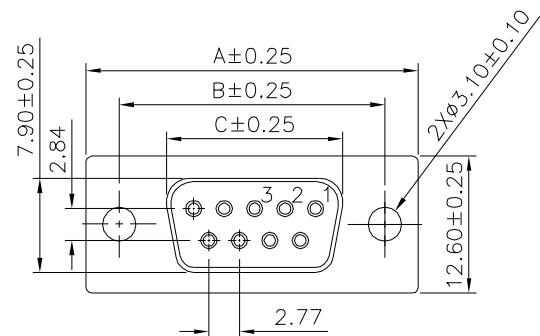

△ 09,15,25,37P

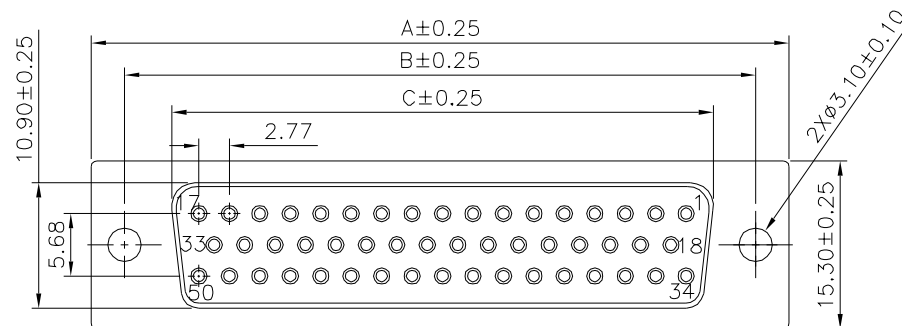

△ 50P

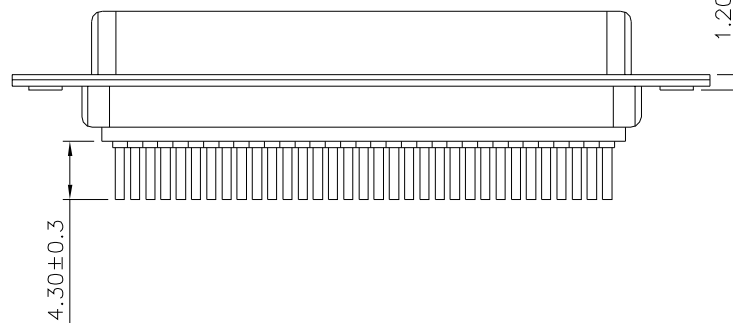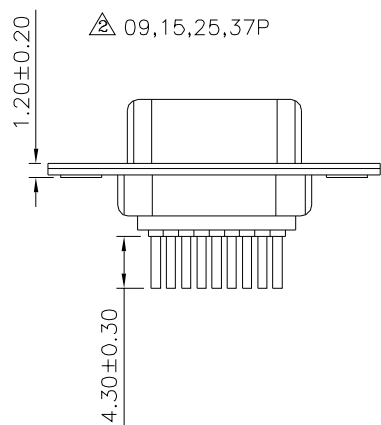

△ Pin	A	B	C	D
09	30.80	25.00	16.30	6.96
15	39.20	33.32	24.70	6.96
25	53.05	47.04	38.40	6.90
37	69.40	63.50	54.80	6.82
50	67.10	61.00	52.20	8.34

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17890

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°

UNIT
mm



	A2	Modify Data	HZF	07/15/2021
	A1	Modify Data	HZF	09/02/2014
	A0	NEW RELEASE	HZF	03/19/2012
NO.	REV.	REVISIONS	CHK	DATE