
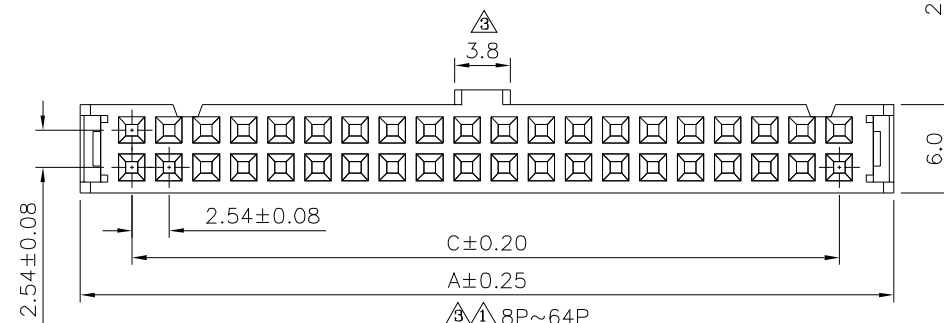
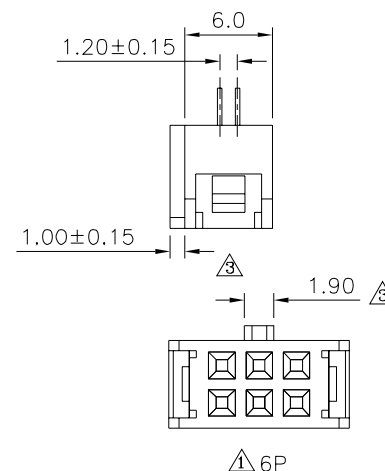
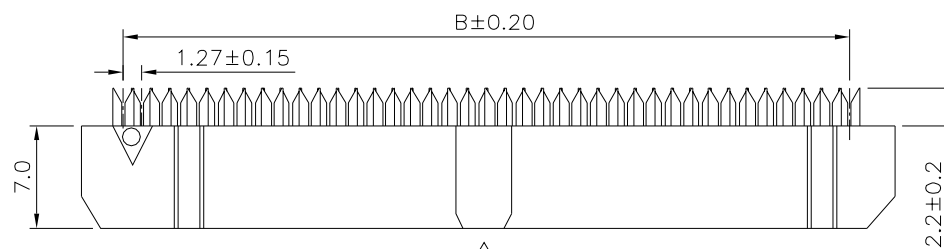



**SPECIFICATION**  
 ③ Current Rating:1A  
 Voltage Rating:250V AC/DC  
 Withstanding Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-40°C~+105°C  
 Insulator:PBT(UL94V-0),Black  
 ② Contact:Brass,Selective Gold Plated Over Nickel  
 RoHS Compliant

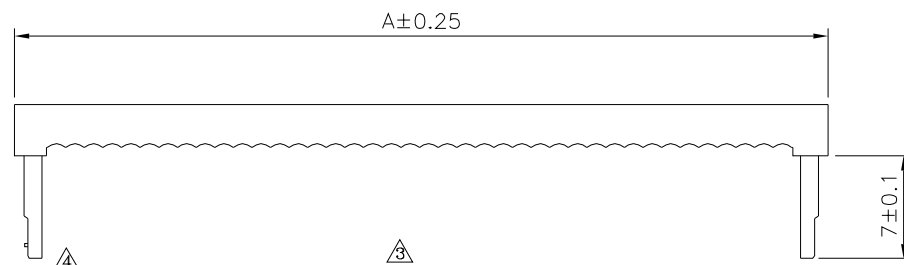

| ③ Pin | A     | B     | C     |
|-------|-------|-------|-------|
| 6     | 12.32 | 6.35  | 5.08  |
| 8     | 14.86 | 8.89  | 7.62  |
| 10    | 17.40 | 11.43 | 10.16 |
| 12    | 19.94 | 13.97 | 12.70 |
| 14    | 22.48 | 16.51 | 15.24 |
| 16    | 25.02 | 19.05 | 17.78 |
| 18    | 27.56 | 21.59 | 20.32 |
| 20    | 30.10 | 24.13 | 22.86 |
| 24    | 35.18 | 29.21 | 27.94 |
| 26    | 37.72 | 31.75 | 30.48 |
| 30    | 42.80 | 36.83 | 35.56 |
| 34    | 47.88 | 41.91 | 40.64 |
| 36    | 50.42 | 44.45 | 43.18 |
| 40    | 55.50 | 49.53 | 48.26 |
| 44    | 60.58 | 54.61 | 53.34 |
| 50    | 68.20 | 62.23 | 60.96 |
| 60    | 80.90 | 74.93 | 73.66 |
| 64    | 85.98 | 80.01 | 78.74 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. ③

18067

SCALE NONE

APPROVED BY  
 Jason Wu

CHECKED BY  
 Leo Han

DRAWING BY  
 Michelle Lee

REV. A4

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 ③ X. ±0.3  
 .X ±0.2  
 .XX ±0.1  
 .XXX ±0.05

UNIT mm

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| ④   | A4   | Modify Data | HZF | 06/26/2026 |
| ③   | A3   | Modify Data | HZF | 05/24/2012 |
| ②   | A2   | Modify Data | HZF | 10/06/2010 |
| ①   | A1   | Modify Data | HZF | 08/13/2010 |
| ①   | A0   | NEW RELEASE | HZF | 10/20/2009 |