


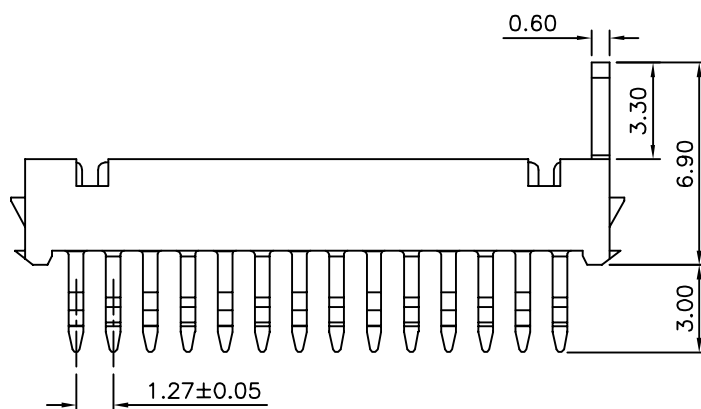


Recommended P.C.B. Layout

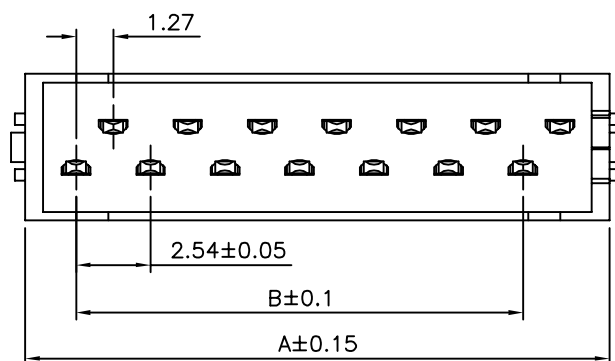

Mating Height Draw

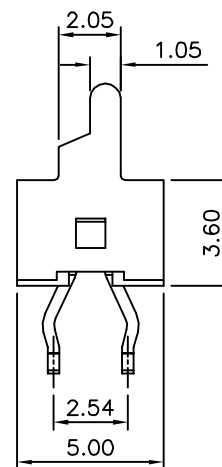

## SPECIFICATION

Current Rating:1.0A AC/DC  
Voltage Rating:30V AC/DC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Withstanding Voltage:500V AC/Minute  
Operation Temperature Range:-40°C~+105°C  
Insulator:PA46(UL94V-0)  
Contact:Phosphor Bronze,Tin Plated Over Nickel  
RoHS Compliant

| Pin | A     | B     |
|-----|-------|-------|
| 04  | 7.20  | 2.54  |
| 06  | 9.74  | 5.08  |
| 08  | 12.28 | 7.62  |
| 10  | 14.82 | 10.16 |
| 12  | 17.36 | 12.70 |
| 14  | 19.90 | 15.24 |
| 16  | 22.44 | 17.78 |
| 18  | 24.98 | 20.32 |
| 20  | 27.52 | 22.86 |
| 22  | 30.06 | 25.40 |
| 24  | 32.60 | 27.94 |
| 26  | 35.14 | 30.48 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

18178

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE.X  $\pm 0.2$ .XX  $\pm 0.15$ 

ANG.

UNIT  
mm

A1

Modify Data

HZF

11/09/2012

A0

NEW RELEASE

BECKY

02/15/2005

NO. REV.

REVISIONS

CHK

DATE