


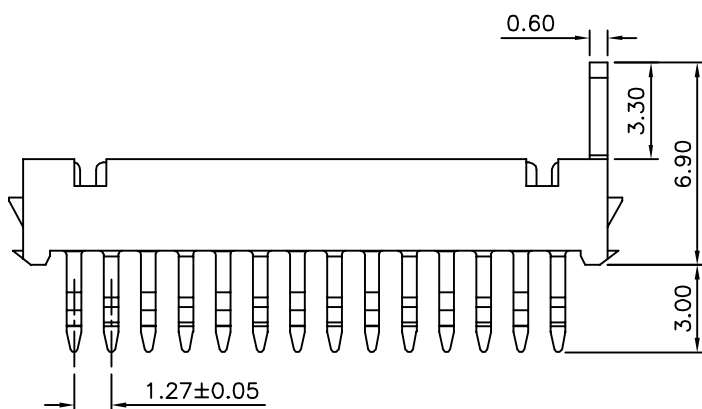


Recommended P.C.B. Layout

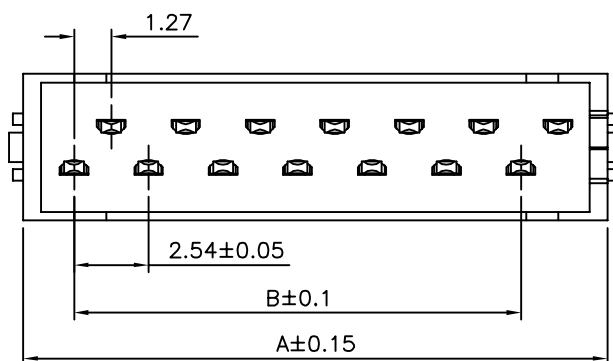

Mating Height Draw

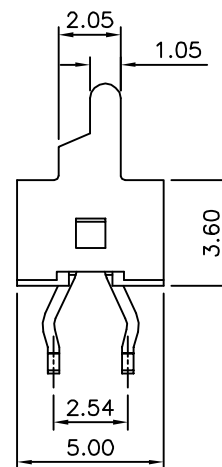

△ SPECIFICATION

Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:500V AC/Minute
Operation Temperature Range:-40°C~+105°C
Insulator:PA46(UL94V-0)
Contact:Phosphor Bronze,Tin Plated Over Nickel
RoHS Compliant



Pin	A	B
04	7.20	2.54
06	9.74	5.08
08	12.28	7.62
10	14.82	10.16
12	17.36	12.70
14	19.90	15.24
16	22.44	17.78
18	24.98	20.32
20	27.52	22.86
22	30.06	25.40
24	32.60	27.94
26	35.14	30.48

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18180

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.2

.XX ±0.15

ANG.

UNIT

mm



△ A1

Modify Data

HZF

11/09/2012

△ A0

NEW RELEASE

BECKY

02/15/2005

NO. REV.

REVISIONS

CHK

DATE