

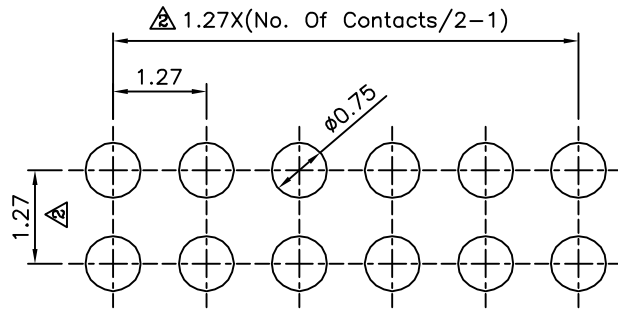
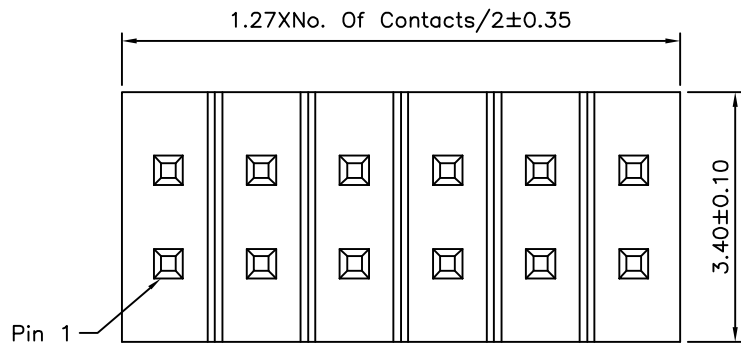


**△ SPECIFICATION**  
 Current Rating:1A  
 Operation Temperature:-55°C~+105°C  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Withstand Strength:1000V AC Minute  
 Housing:PA6T(UL94V-0),Black  
 Contact:Copper Alloys,Gold Flash  
 No. Of Contacts:04~100 Pin  
 RoHS Compliant

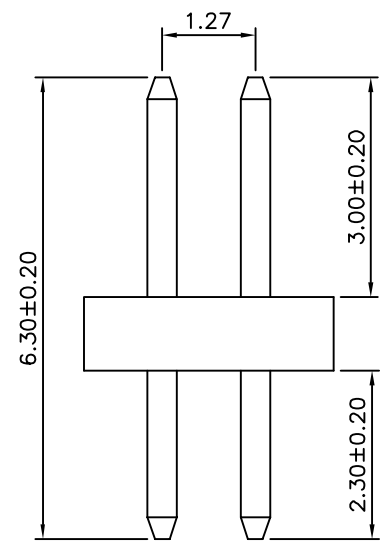

Recommended P.C.B. Layout

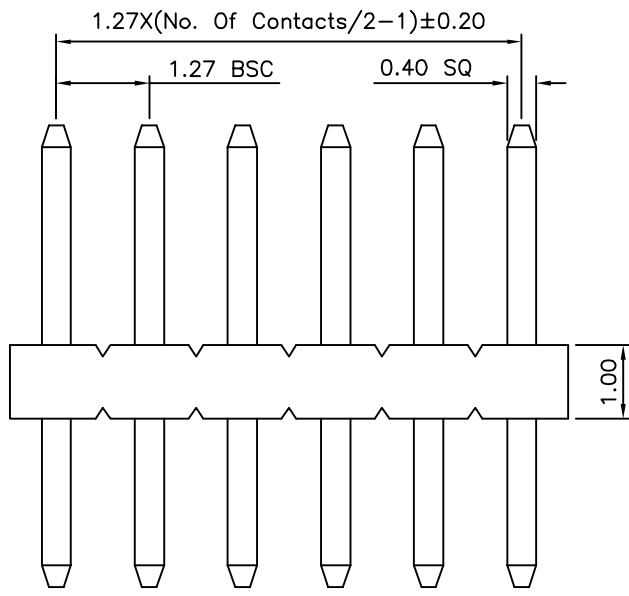

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
18247		MEI	.X ±0.38	
		HZF	.XX ±0.25	
SCALE		DRAWING BY	ANG. ±5°	UNIT
NONE	REV.	QQJ	mm	
	A2			

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/19/2010
△ A1		Modify Data	BECKY	04/04/2006
△ A0		NEW RELEASE	BECKY	01/14/2005