

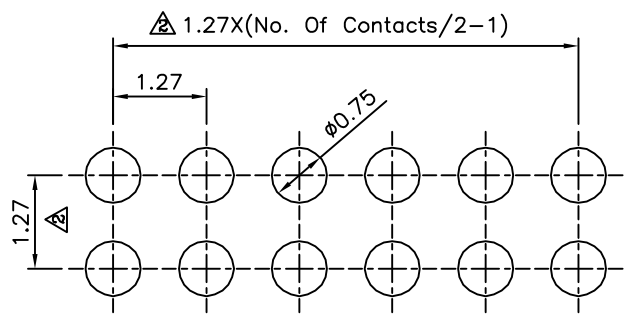
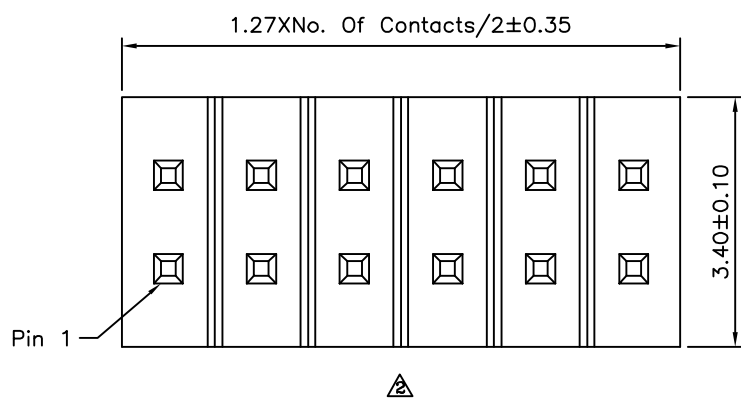


△ SPECIFICATION
 Current Rating:1A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Withstand Strength:1000V AC Minute
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~100 Pin
 RoHS Compliant

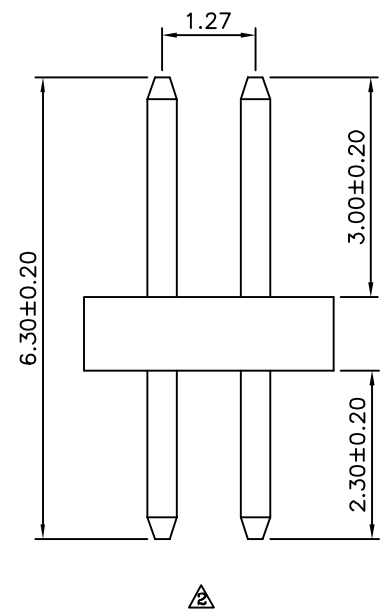

Recommended P.C.B. Layout

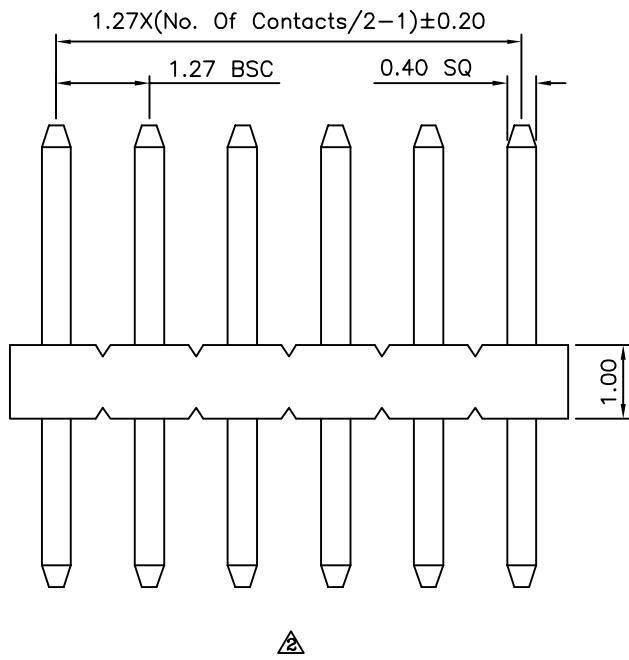

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
18255		MEI		
		CHECKED BY		
		HZF		.X ±0.38
		DRAWING BY		.XX ±0.25
		QQJ		ANG. ±5°
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	08/19/2010
△A1		Modify Data	BECKY	04/04/2006
△A0		NEW RELEASE	BECKY	01/14/2005