


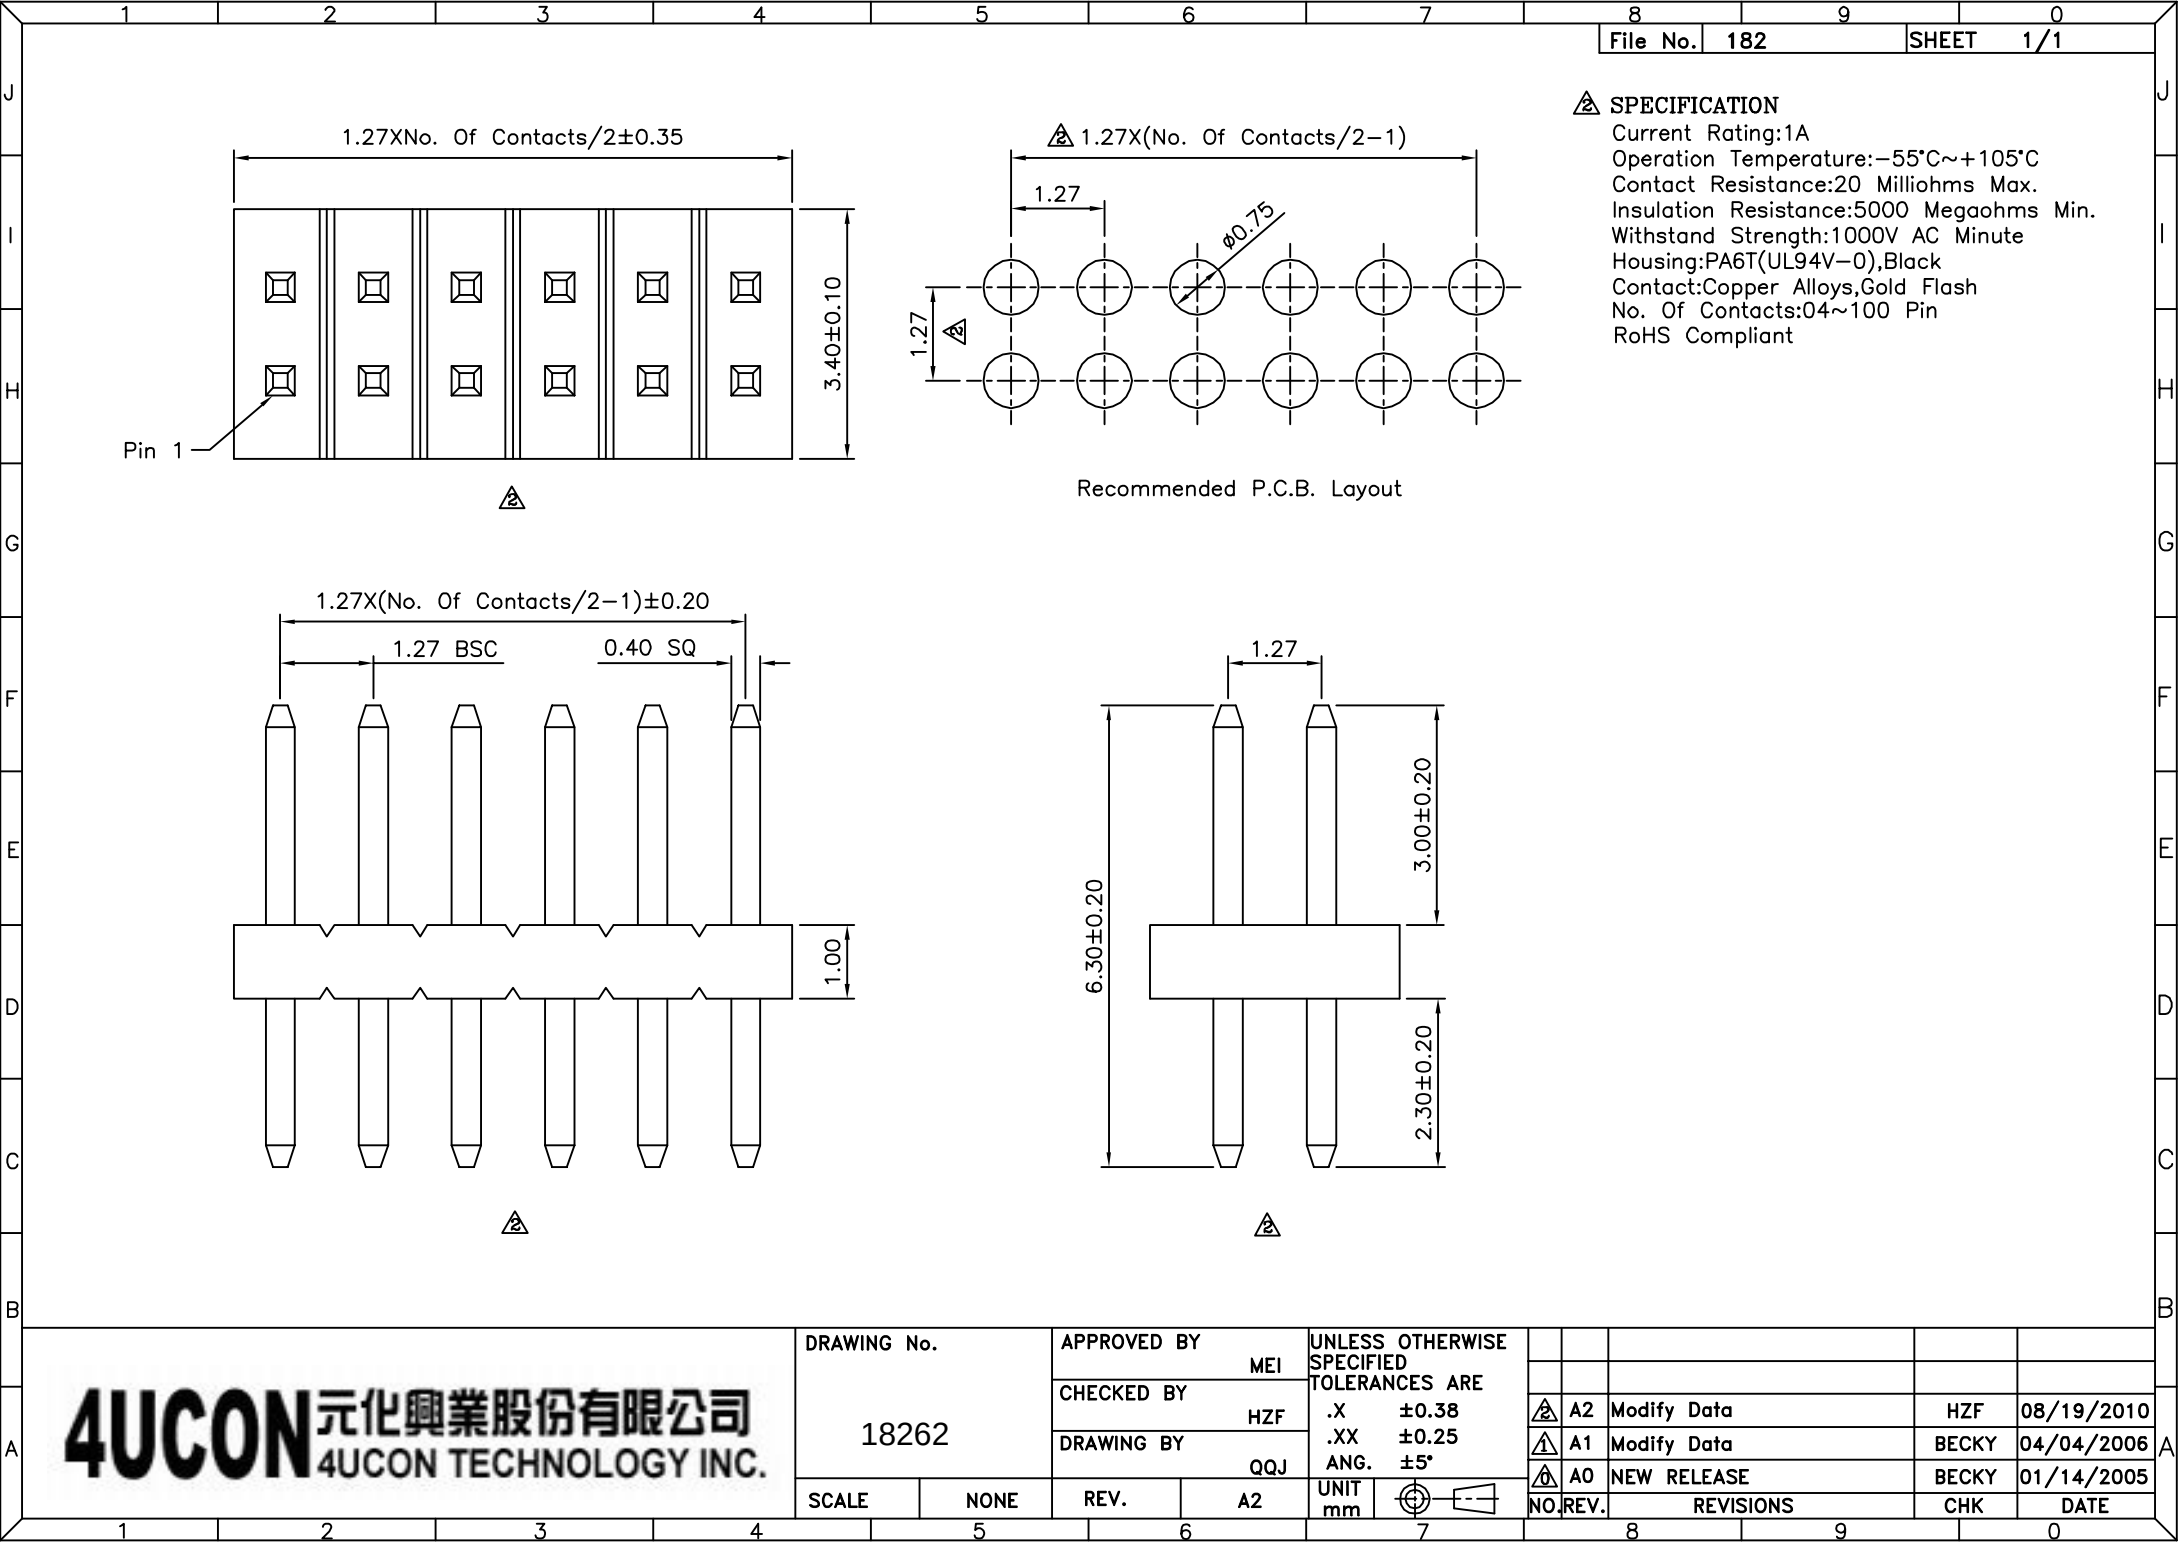

△ SPECIFICATION
Current Rating:1A
Operation Temperature:−55°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Withstand Strength:1000V AC Minute
Housing:PA6T(UL94V−0),Black
Contact:Copper Alloys,Gold Flash
No. Of Contacts:04~100 Pin
RoHS Compliant

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 18262		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
		MEI							
		CHECKED BY							
		HZF							
DRAWING BY		QQJ		.X ±0.38	⚠ A2	Modify Data	HZF	08/19/2010	A
				.XX ±0.25	⚠ A1	Modify Data	BECKY	04/04/2006	
				ANG. ±5°	⚠ A0	NEW RELEASE	BECKY	01/14/2005	
SCALE	NONE	REV.	A2	UNIT mm		NO. REV.	REVISIONS	CHK	DATE