

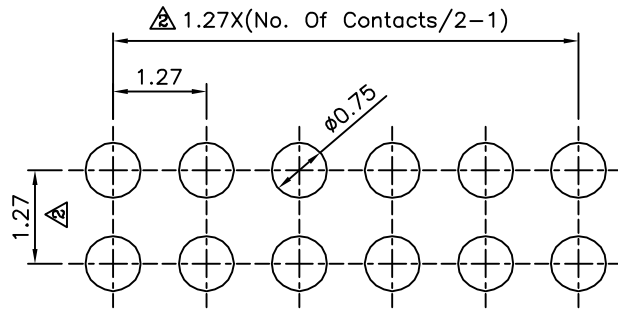
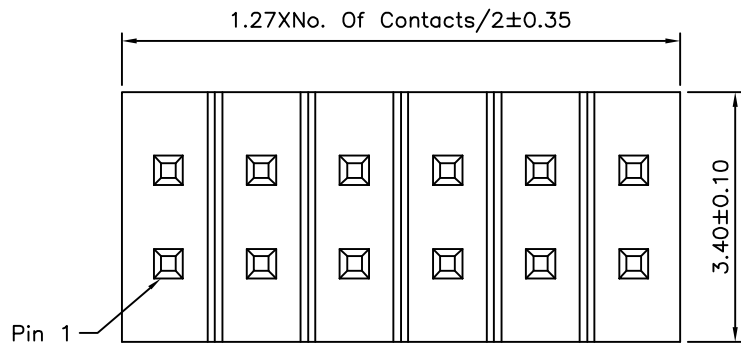


△ SPECIFICATION
 Current Rating:1A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Withstand Strength:1000V AC Minute
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~100 Pin
 RoHS Compliant

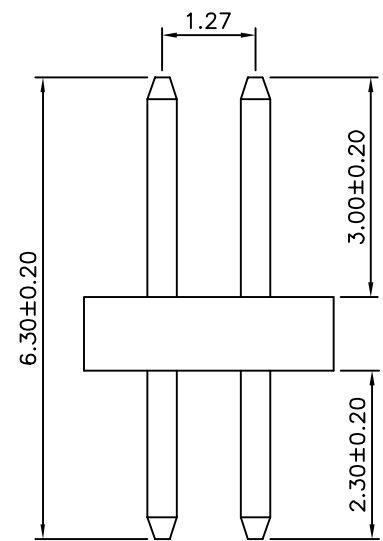

Recommended P.C.B. Layout

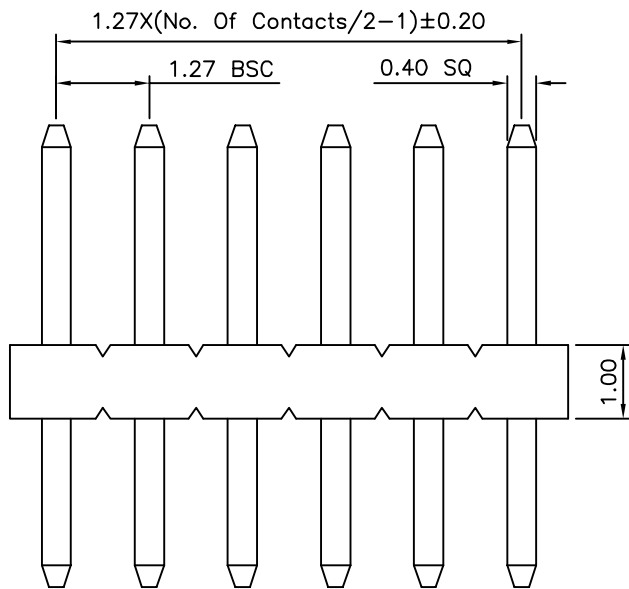

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|---|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |
| 18276 | | MEI | | |
| | | CHECKED BY | | |
| | | HZF | | .X ±0.38 |
| | | DRAWING BY | | .XX ±0.25 |
| | | QQJ | | ANG. ±5° |
| SCALE | NONE | REV. | A2 | UNIT |
| | | | | mm |

| | | | | |
|------|------|-------------|-------|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A2 | | Modify Data | HZF | 08/19/2010 |
| △ A1 | | Modify Data | BECKY | 04/04/2006 |
| △ A0 | | NEW RELEASE | BECKY | 01/14/2005 |