

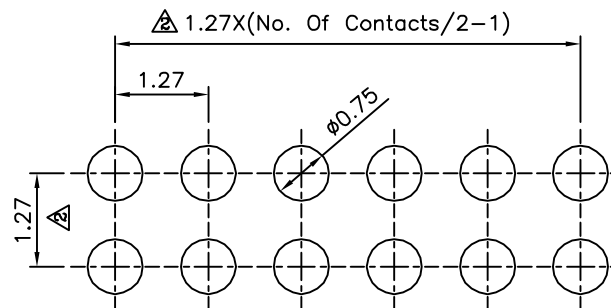
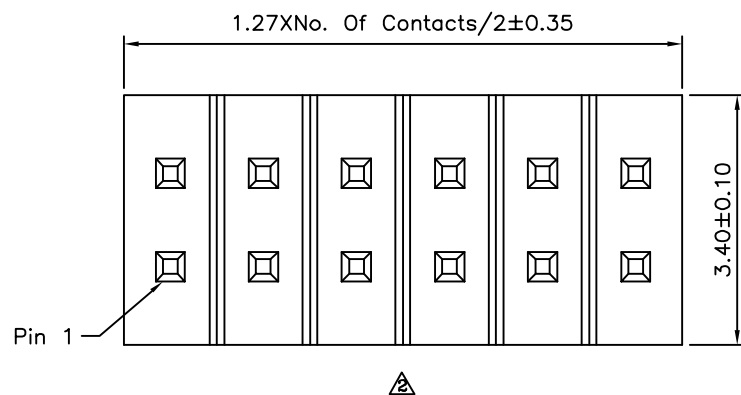


△ SPECIFICATION

Current Rating:1A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Withstand Strength:1000V AC Minute
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:04~100 Pin
 RoHS Compliant

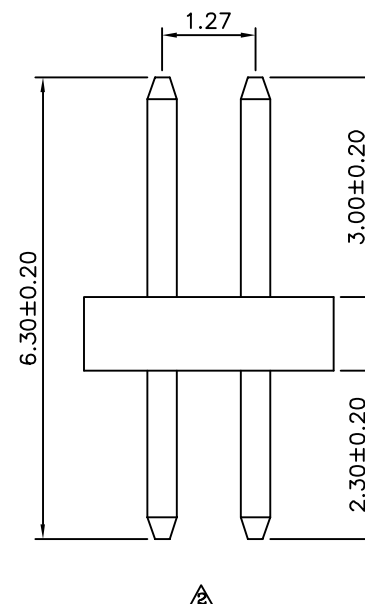

Recommended P.C.B. Layout

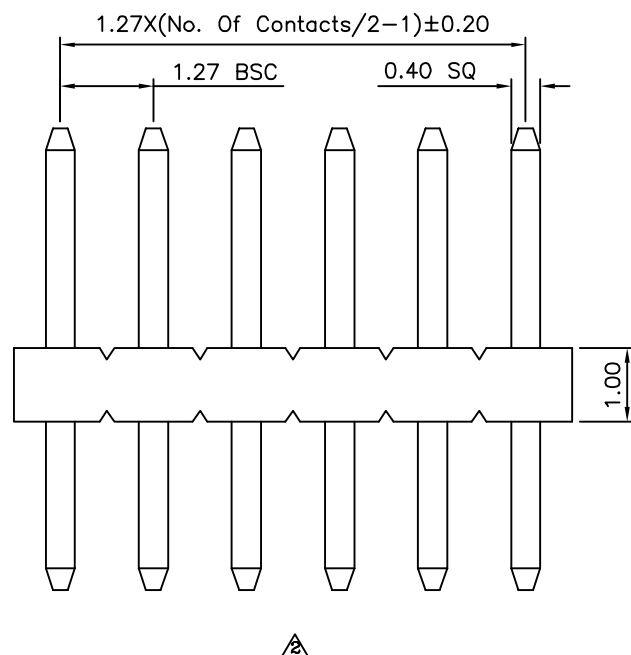

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18277

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

REV.

A2


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG. $\pm 5^\circ$

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/19/2010
△ A1		Modify Data	BECKY	04/04/2006
△ A0		NEW RELEASE	BECKY	01/14/2005