

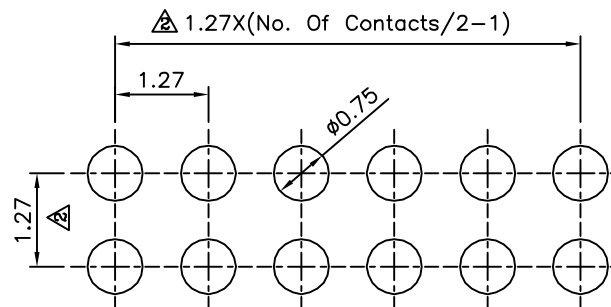
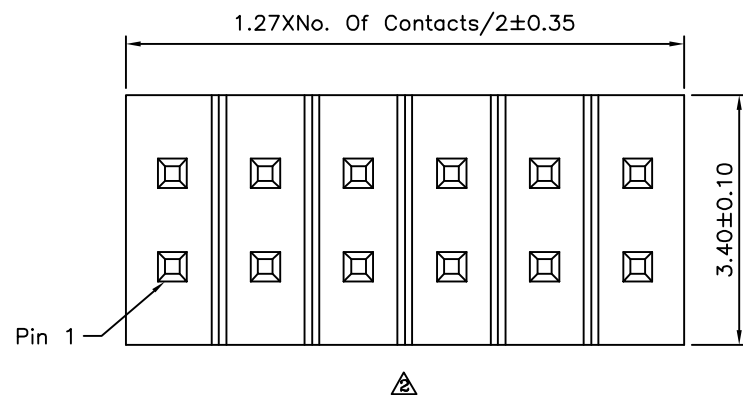


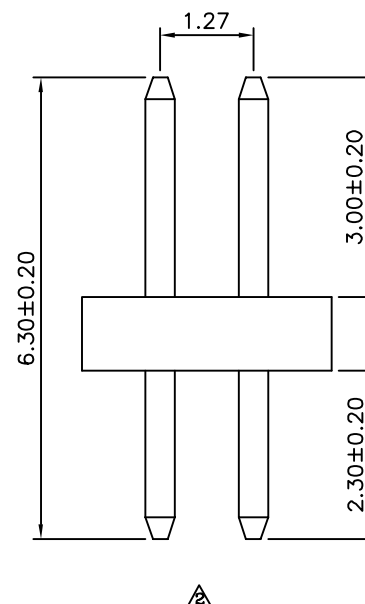

Recommended P.C.B. Layout

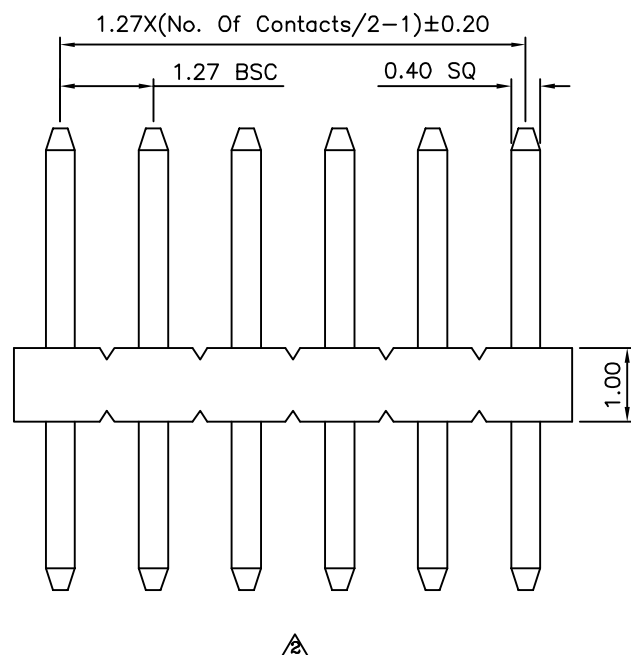

△₂ SPECIFICATION

Current Rating:1A
Operation Temperature:-55°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Withstand Strength:1000V AC Minute
Housing:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash
No. Of Contacts:04~100 Pin
RoHS Compliant