


△ SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Max. Processing Temperature:230°C For 30~60s
(260°C For 10s)


Insulator:LCP(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
No. Of Contacts:06~100 Contacts
RoHS Compliant

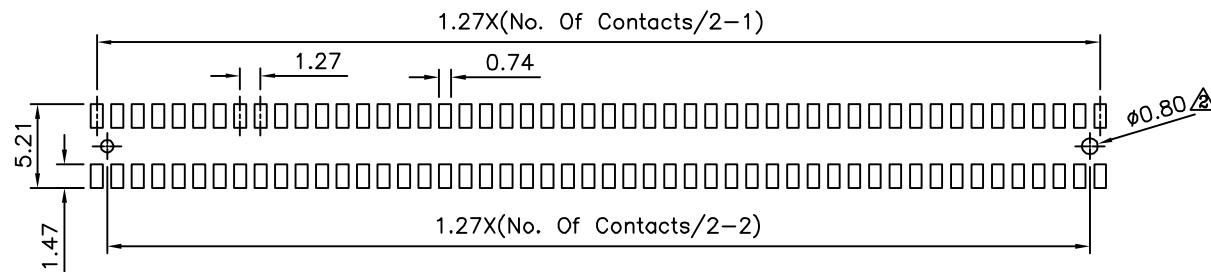


△ Recommended P.C.B. Layout



△

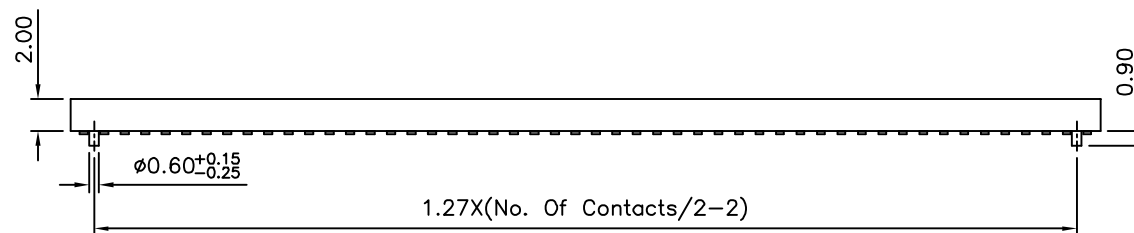

△



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18333

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE

REV.

A2

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ± 0.50


.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/08/2012
△ A1		Modify PCB Layout	BECKY	04/11/2006
△ A0		NEW RELEASE	BECKY	04/06/2005