File No.	100	SHEET	1/1

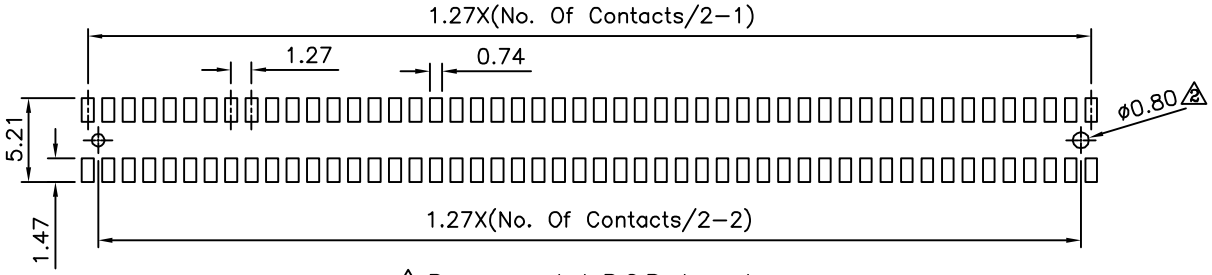

1 Recommended P.C.B. Layout

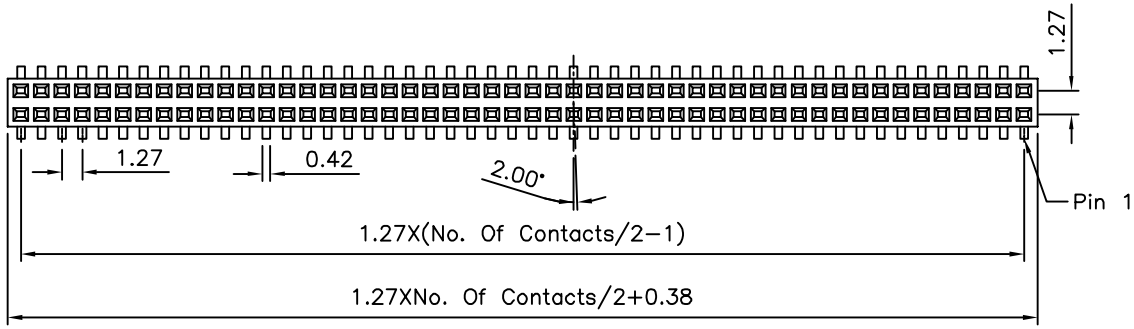

2

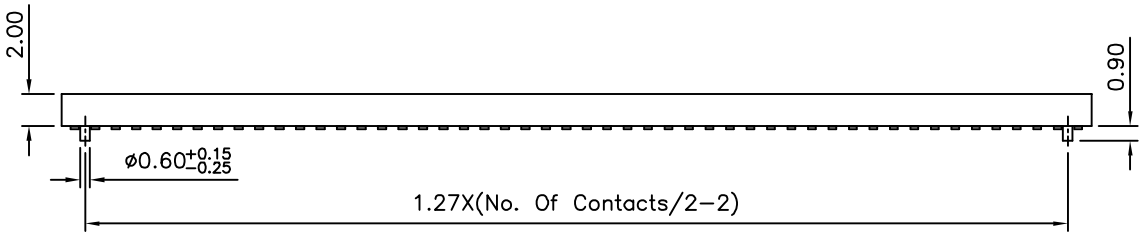

2



2

2 SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Max. Processing Temperature:230°C For 30~60s
(260°C For 10s)
Insulator:LCP(UL94V−0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
No. Of Contacts:06~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
18345	CHECKED BY	HZF	2 X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05
	DRAWING BY	GAO	
SCALE NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	08/08/2012
1	A1	Modify PCB Layout	BECKY	04/11/2006
0	A0	NEW RELEASE	BECKY	04/06/2005