





△ SPECIFICATION

Current Rating:1 Amp
 Withstand Voltage:500V AC
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Max. Processing Temperature:230°C For 30~60s
 (260°C For 10s)

Insulator:LCP(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

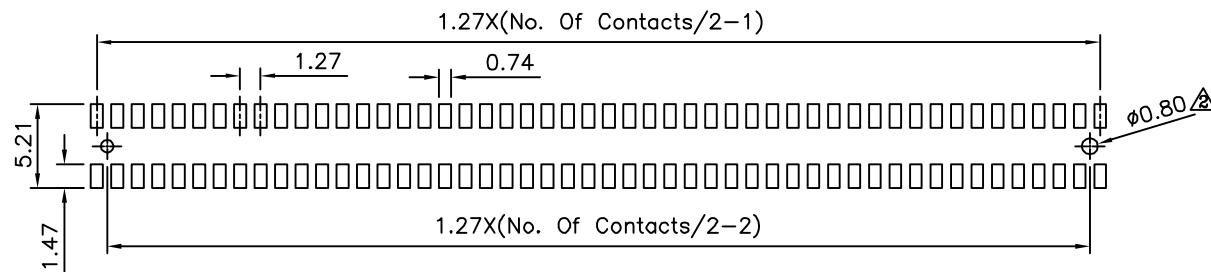

△ Recommended P.C.B. Layout

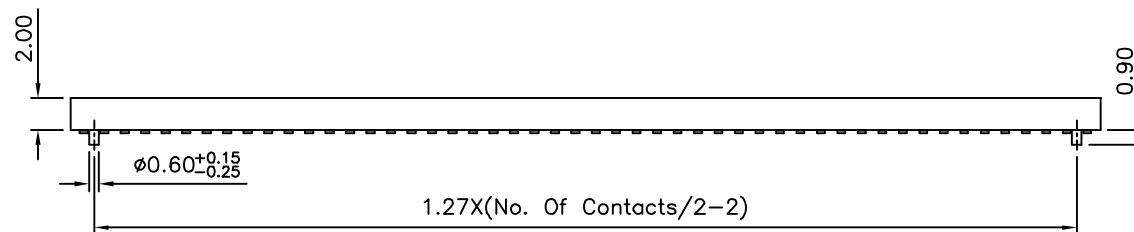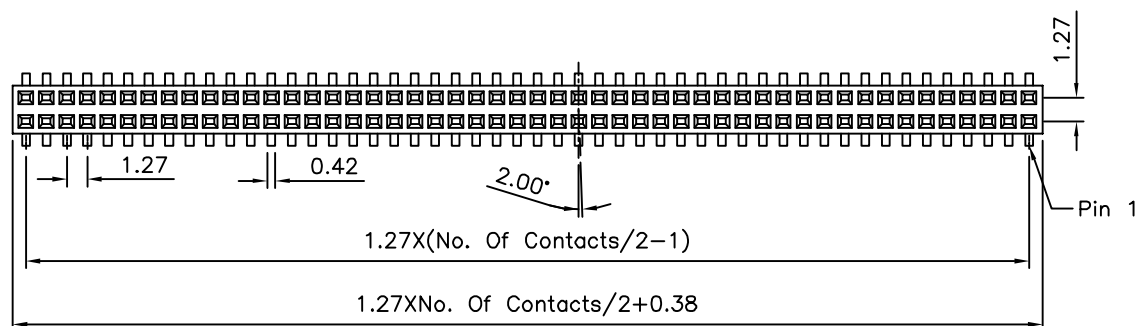

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18346

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ X. ± 0.50
 X ± 0.35
 .XX ± 0.25
 .XXX ± 0.05

UNIT

mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/08/2012
△ A1		Modify PCB Layout	BECKY	04/11/2006
△ A0		NEW RELEASE	BECKY	04/06/2005