





# △ SPECIFICATION

Current Rating:1 Amp  
Withstand Voltage:500V AC  
Insulation Resistance:5000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Max. Processing Temperature:230°C For 30~60s  
(260°C For 10s)

Insulator:LCP(UL94V-0),Black  
Contact:Phosphor Bronze,Gold Flash Over Nickel  
No. Of Contacts:06~100 Contacts  
RoHS Compliant

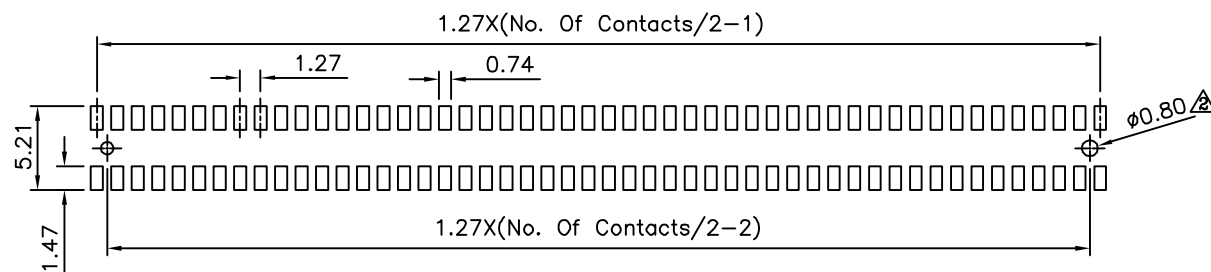

△ Recommended P.C.B. Layout

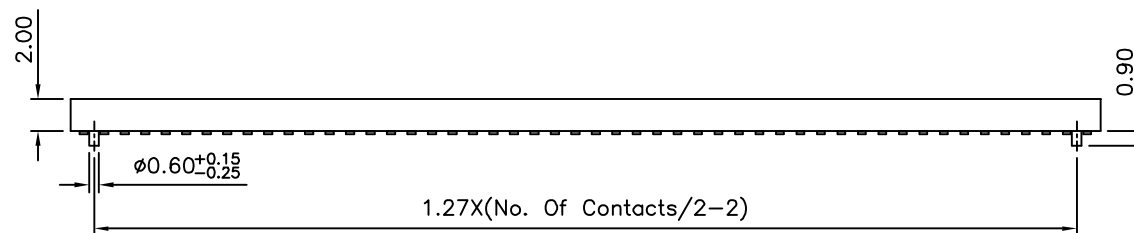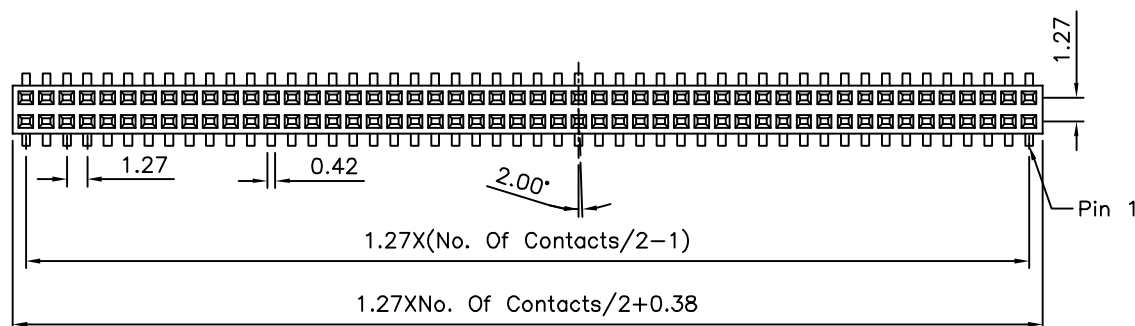

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

18349

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE


REV.

A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

△ X. ±0.50  
X ±0.35  
.XX ±0.25  
.XXX ±0.05

UNIT  
mm



| NO.  | REV. | REVISIONS         | CHK   | DATE       |
|------|------|-------------------|-------|------------|
| △ A2 |      | Modify Data       | HZF   | 08/08/2012 |
| △ A1 |      | Modify PCB Layout | BECKY | 04/11/2006 |
| △ A0 |      | NEW RELEASE       | BECKY | 04/06/2005 |