

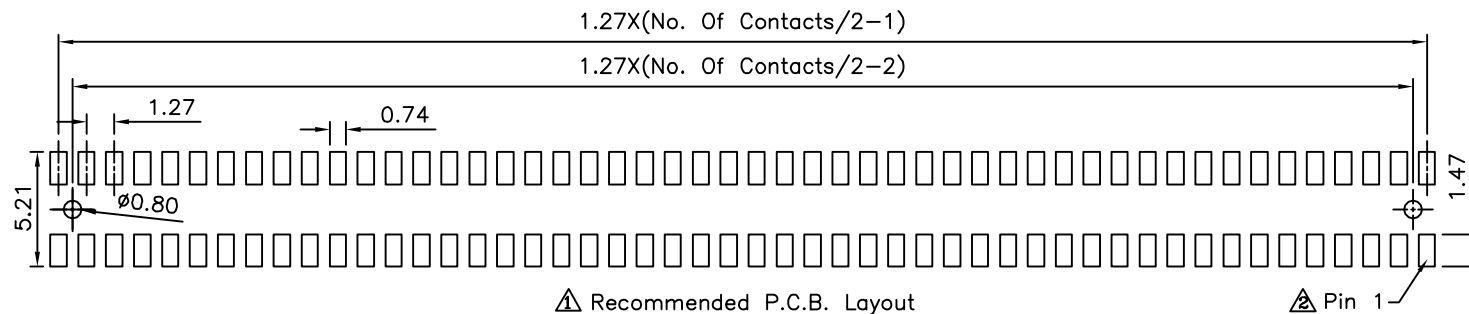



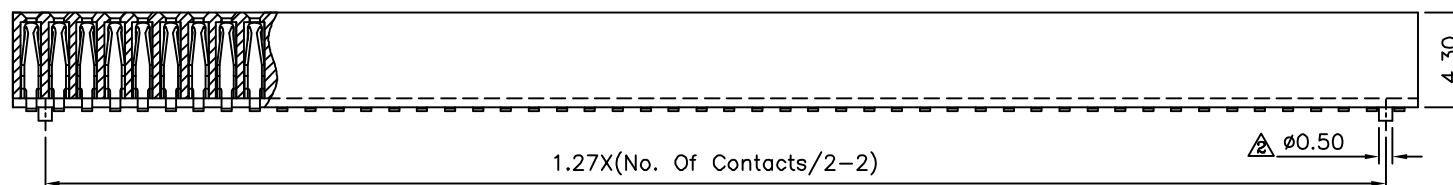

1 SPECIFICATION

Current Rating:1 Amps
Dielectric Withstanding:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Max. Processing Temperature:230°C For 30~60s
(260°C For 10 Seconds)

△ Contact: Phosphor Bronze, Gold Flash Over Nickel
RoHS Compliant

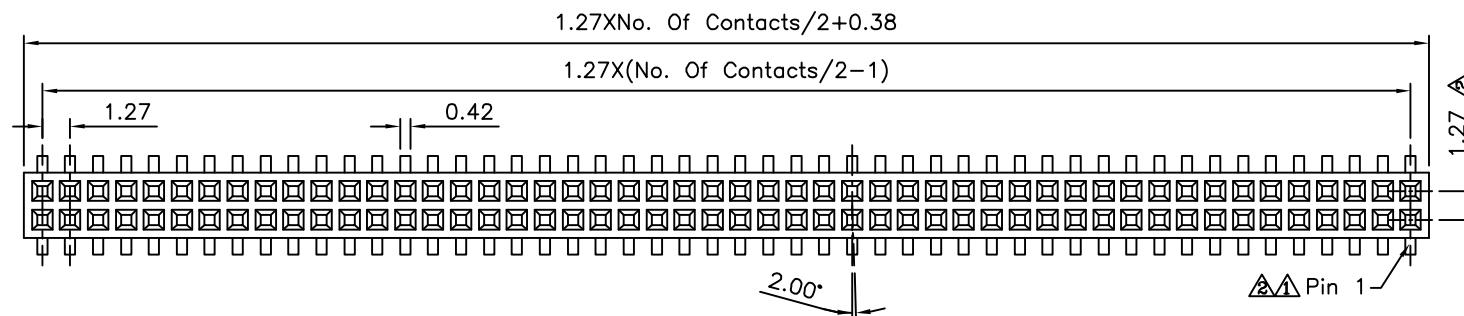

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

18386

SCALE	NONE
-------	------

APPROVED BY

EMILY

CHECKED BY

DRAWING BY

SONG

Y	UNLESS OTHERWISE SPECIFIED	
	TOLERANCES ARE	
	X.	± 0.20
	.X	± 0.15
	.XX	± 0.10
G	.XXX	± 0.05



	A2	Modify Data	HZF	12/03/2013
	A1	Modify Data	HZF	04/30/2010
	A0	NEW RELEASE	SHIN	11/28/2006
NO.	REV.	REVISIONS	CHK	DATE