

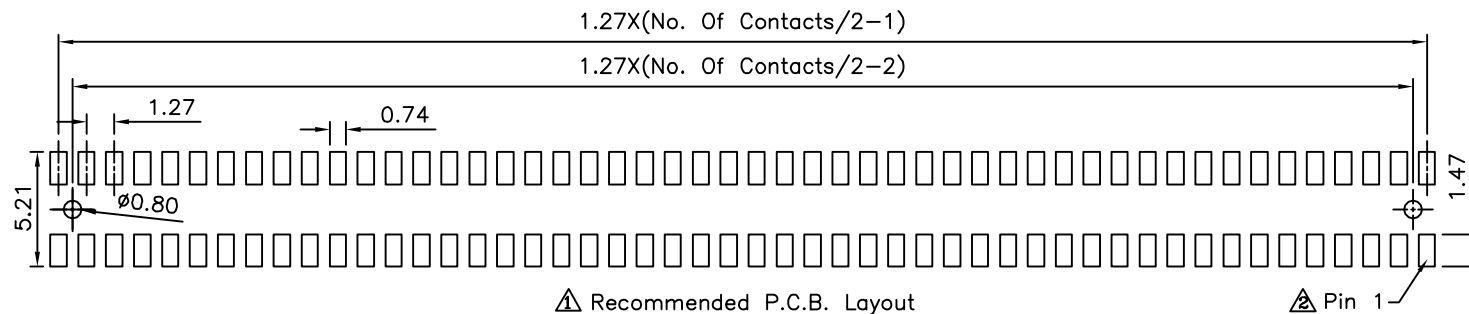



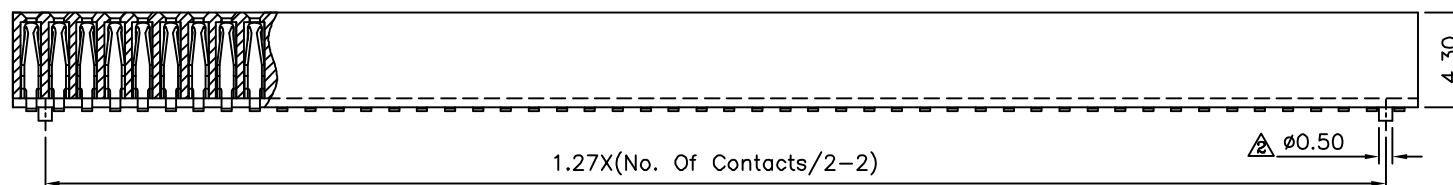

1 SPECIFICATION

Current Rating:1 Amps
Dielectric Withstanding:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Max. Processing Temperature:230°C For 30~60s
(260°C For 10 Seconds)

△ Contact: Phosphor Bronze, Gold Flash Over Nickel
RoHS Compliant

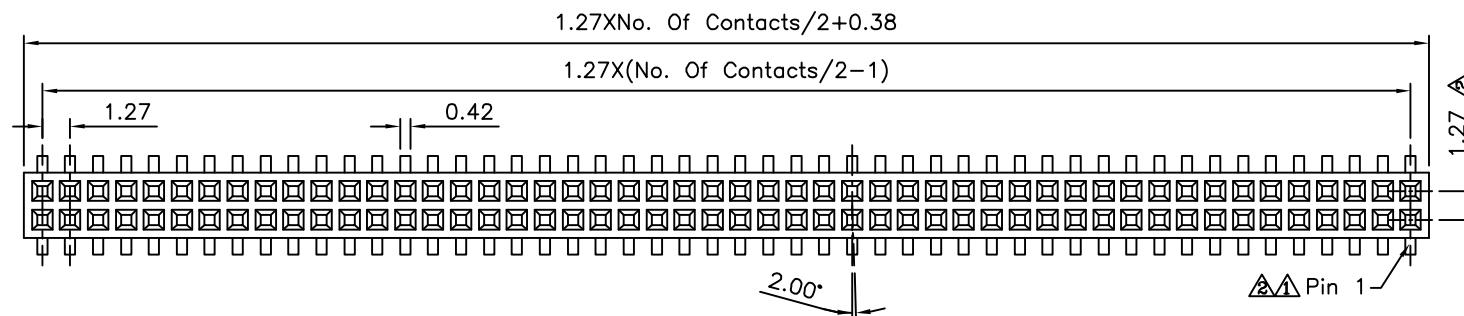

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

18391

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
	X. ± 0.20
	.X ± 0.15
	.XX ± 0.10
G	.XXX ± 0.05

UNIT	mm
------	----



	A2	Modify Data	HZF	12/03/2013
	A1	Modify Data	HZF	04/30/2010
	A0	NEW RELEASE	SHIN	11/28/2006
NO.	REV.	REVISIONS	CHK	DATE