


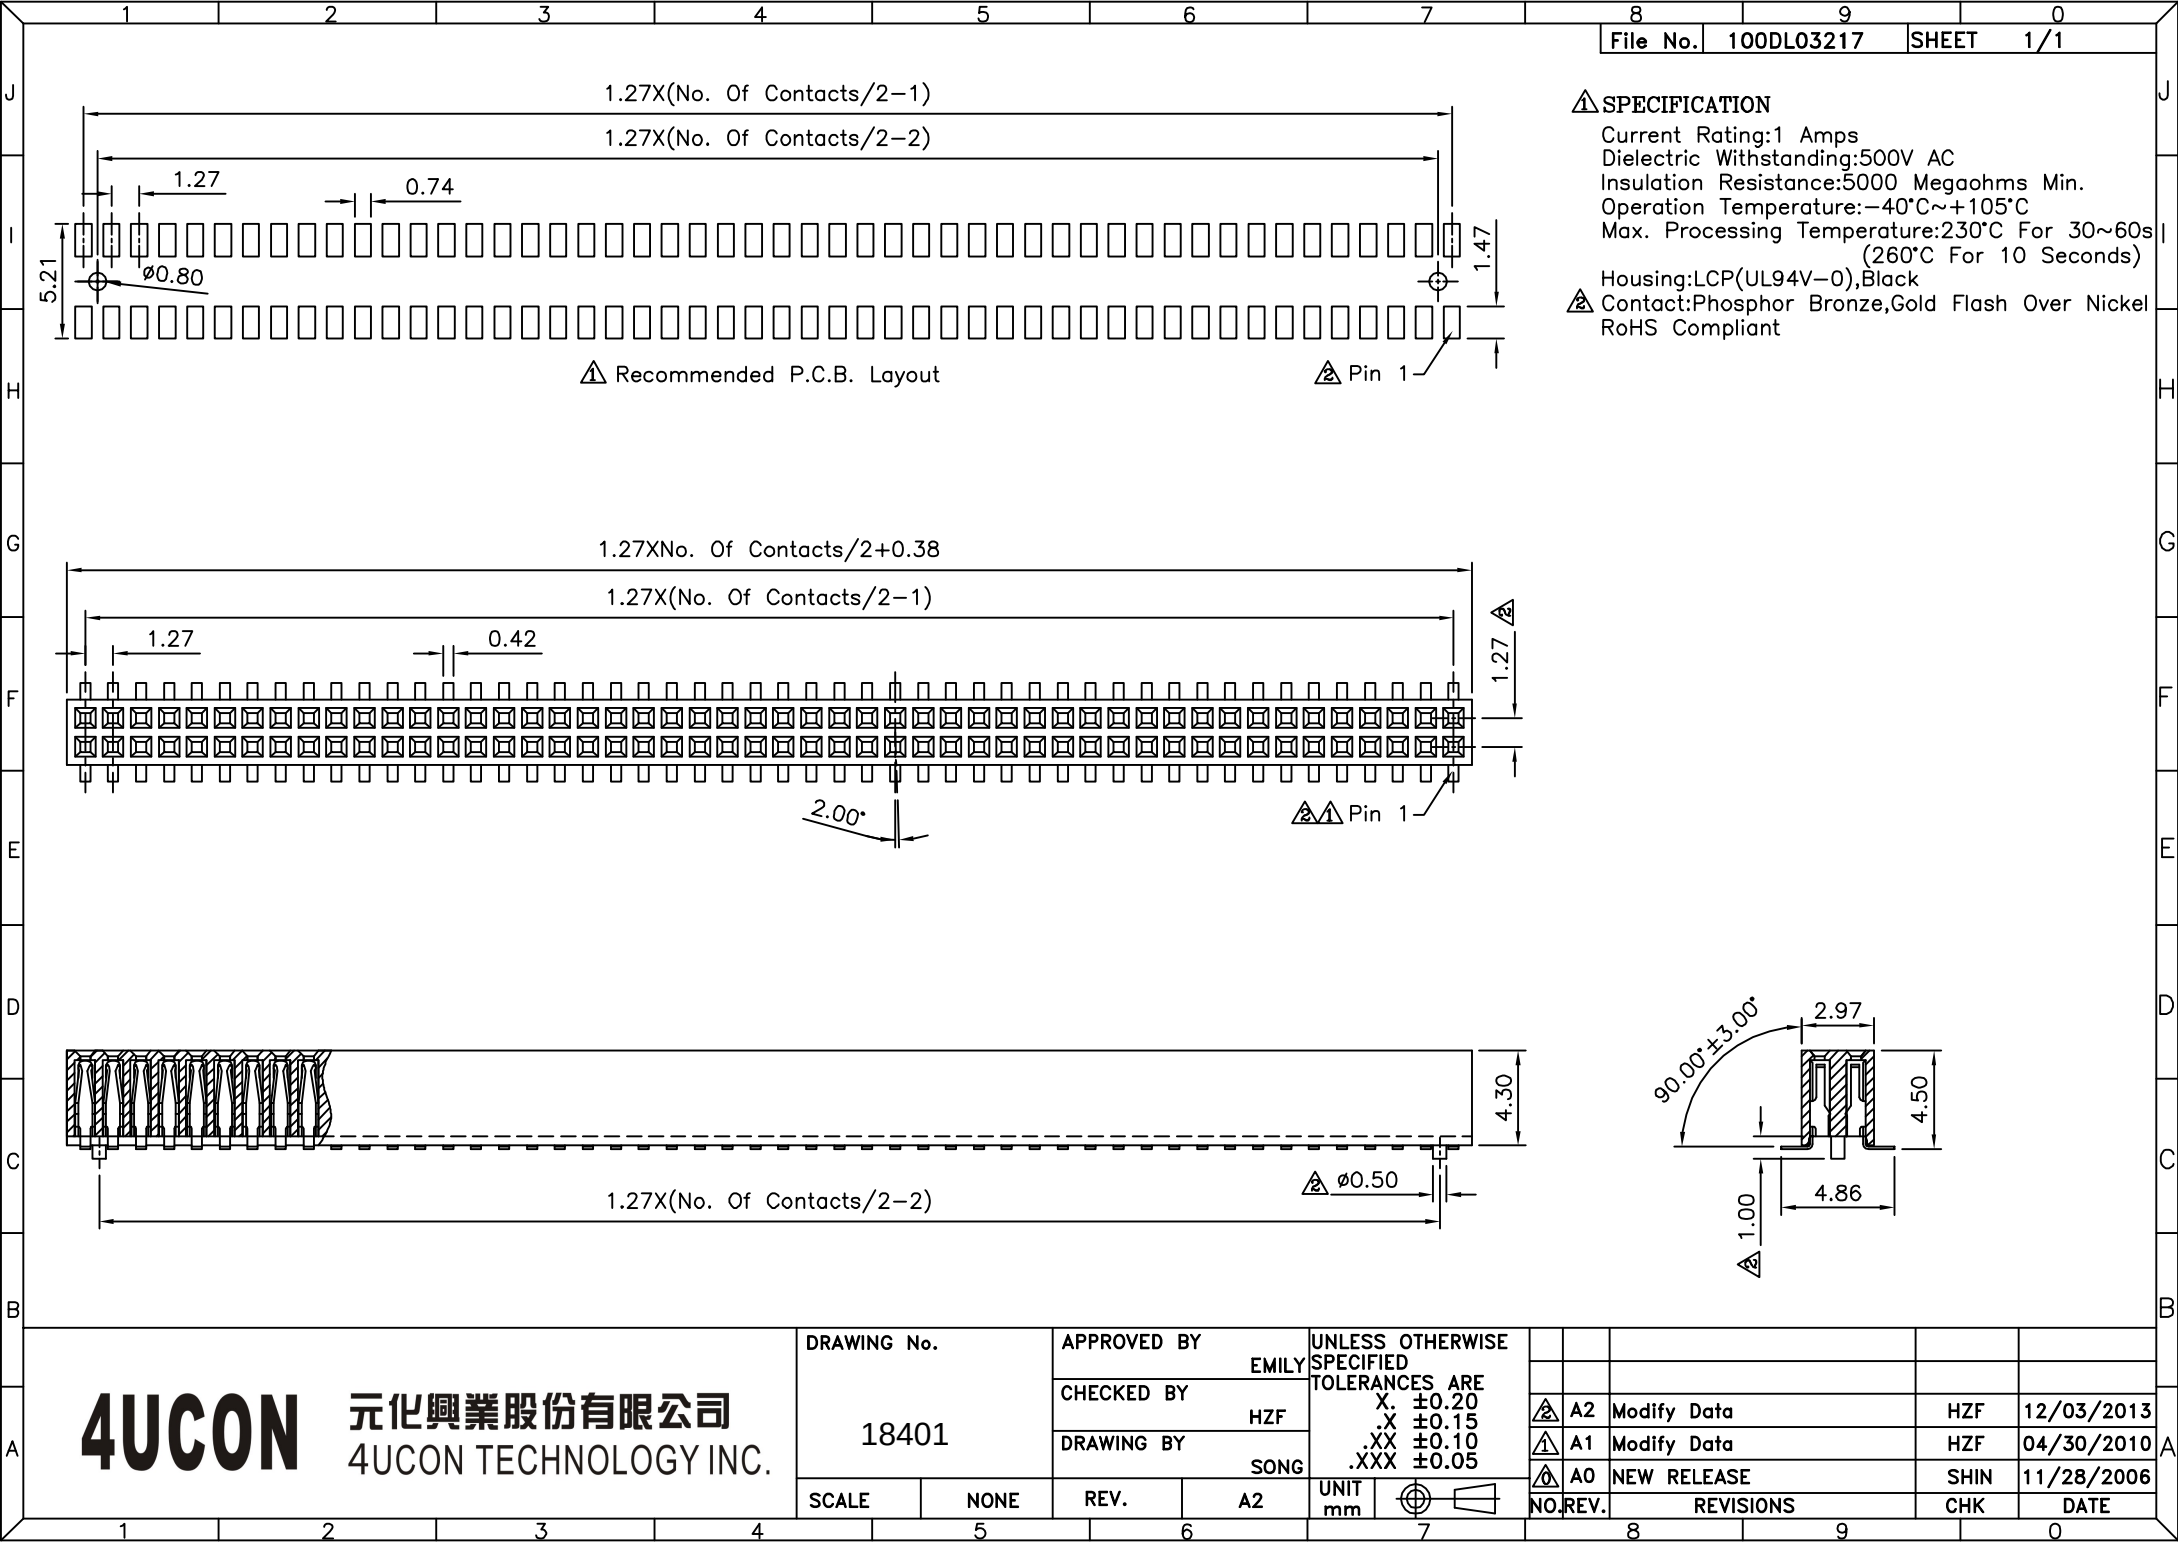

△ SPECIFICATION
Current Rating:1 Amps
Dielectric Withstanding:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Max. Processing Temperature:230°C For 30~60s
(260°C For 10 Seconds)
Housing:LCP(UL94V-0),Black
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 18401		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.20 .X ±0.15 .XX ±0.10 .XXX ±0.05	
		EMILY			
		CHECKED BY	HZF		
		DRAWING BY			
		SONG			
SCALE	NONE	REV.	A2	UNIT mm	

NO.		REV.		REVISIONS		CHK		DATE	
A2		Modify Data		HZF		12/03/2013			
A1		Modify Data		HZF		04/30/2010			
A0		NEW RELEASE		SHIN		11/28/2006			