


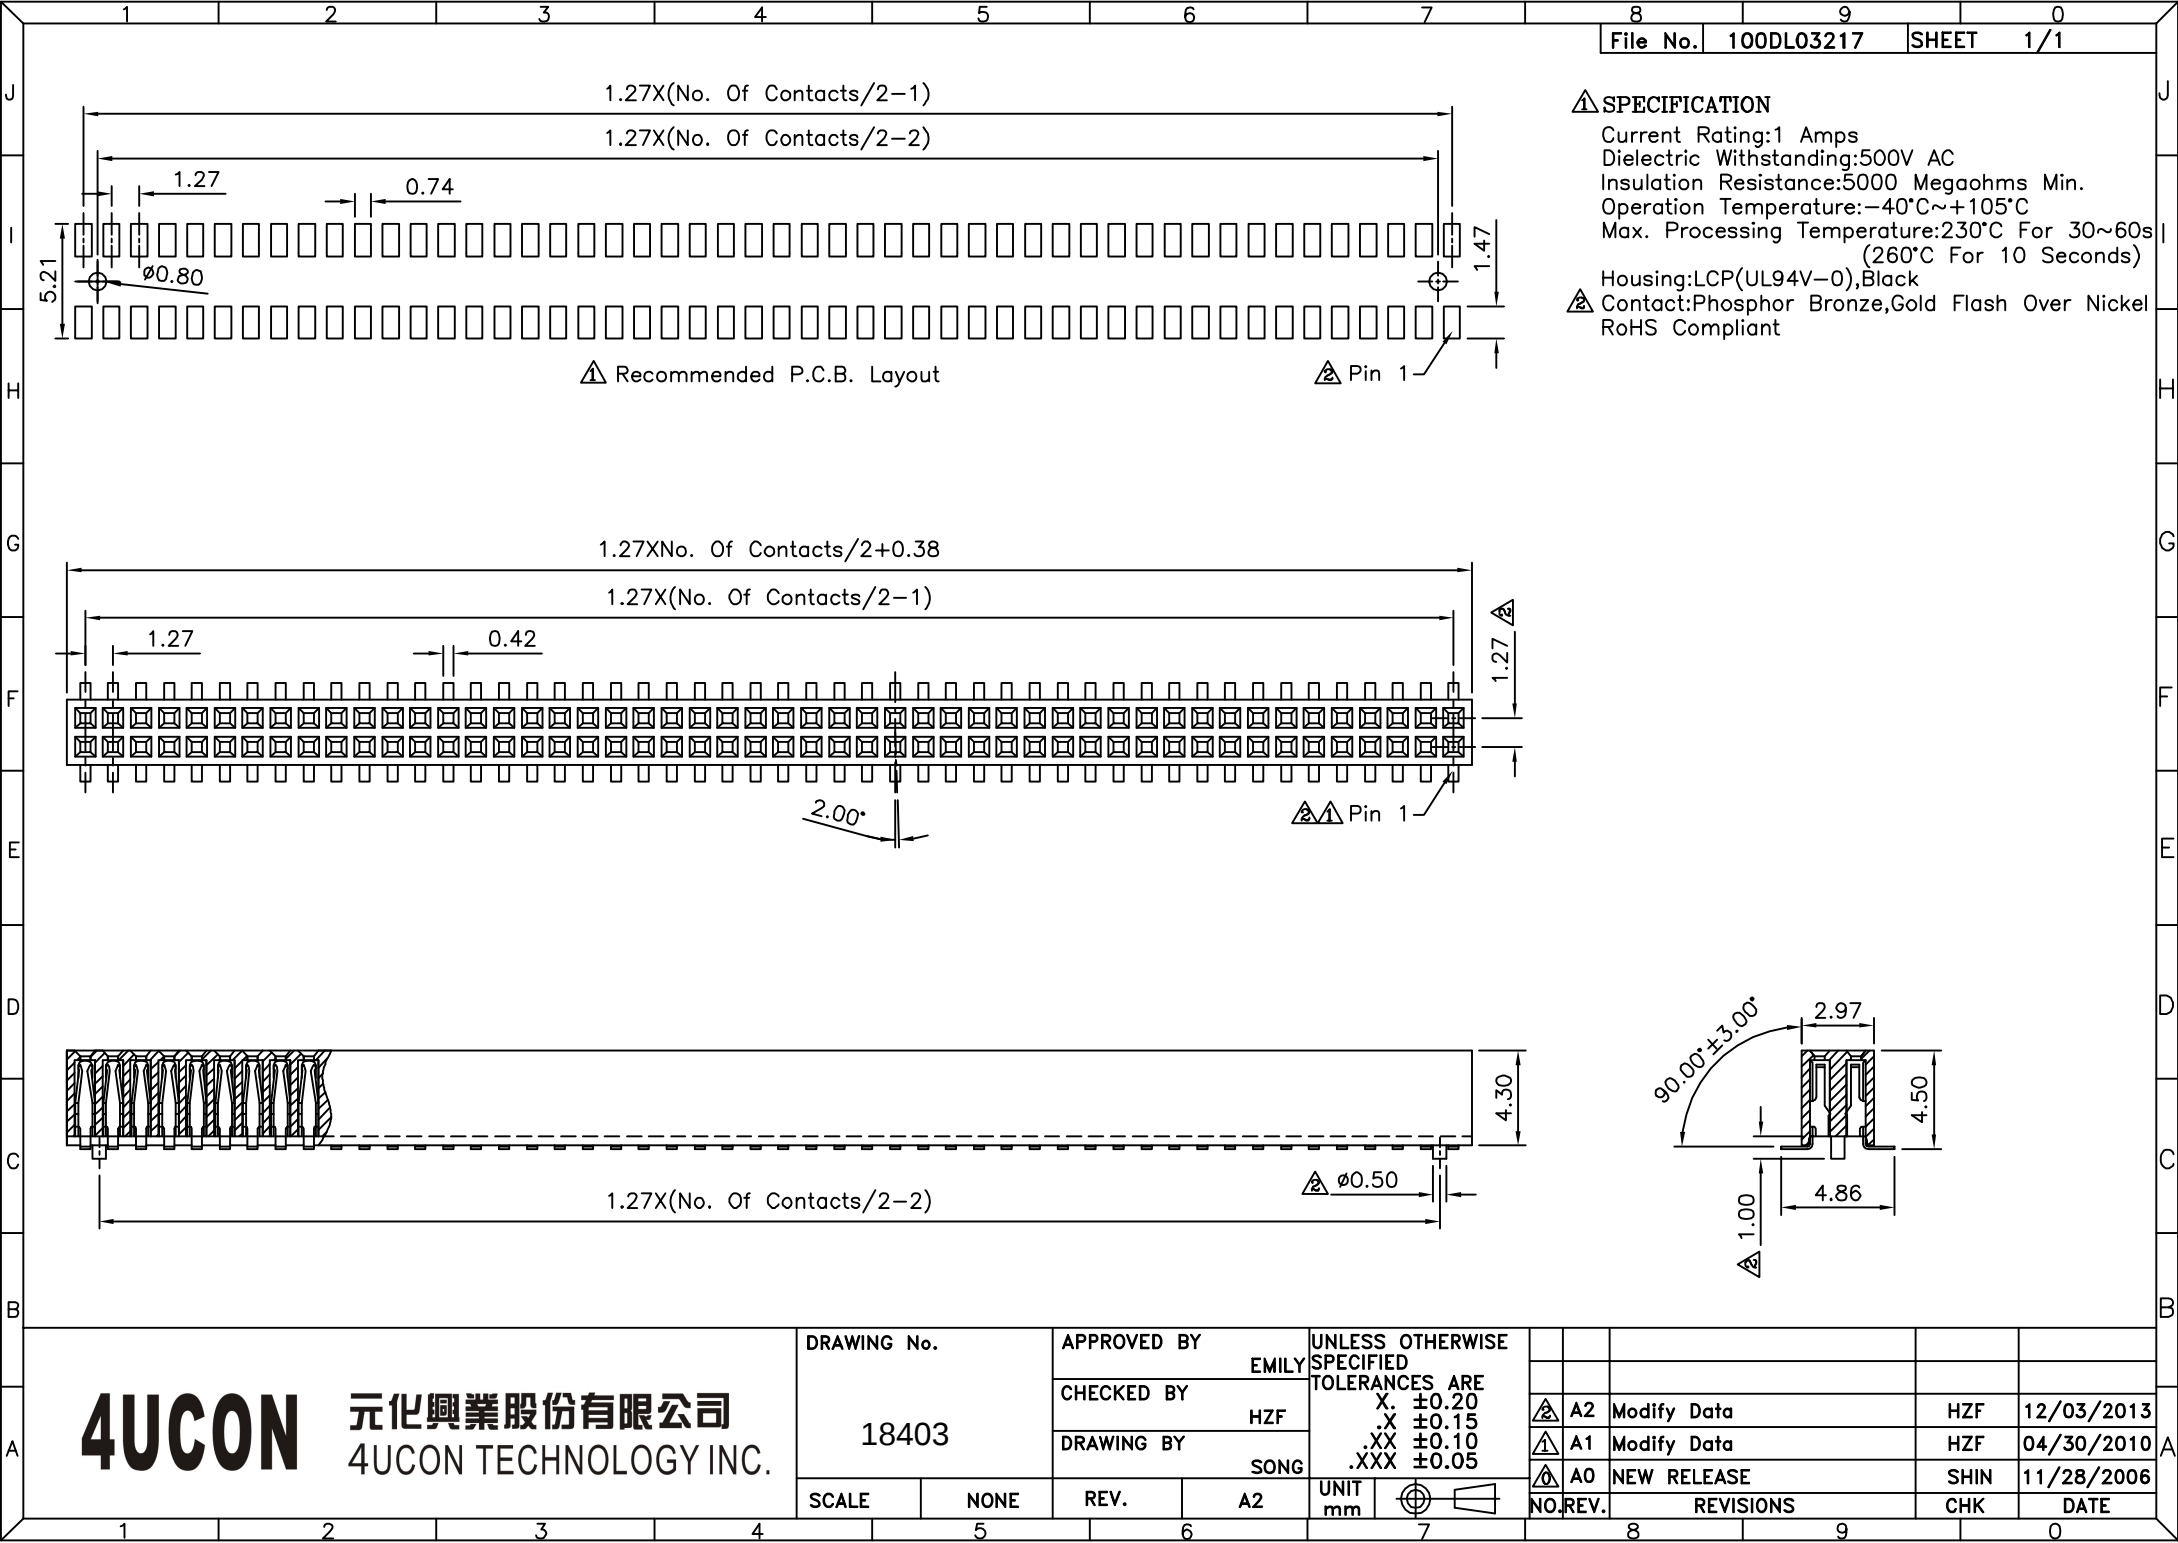

△ SPECIFICATION
Current Rating:1 Amps
Dielectric Withstanding:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Max. Processing Temperature:230°C For 30~60s
(260°C For 10 Seconds)
Housing:LCP(UL94V-0),Black
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 18403		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY SONG	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.20
.X ±0.15
.XX ±0.10
.XXX ±0.05
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	12/03/2013
△ A1		Modify Data	HZF	04/30/2010
△ A0		NEW RELEASE	SHIN	11/28/2006