

△ SPECIFICATION



Current Rating:1 Amps
 Dielectric Withstanding:500V AC
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Max. Processing Temperature:230°C For 30~60s
 (260°C For 10 Seconds)
 Housing:LCP(UL94V-0),Black
 △ Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

△ Recommended P.C.B. Layout

△ Pin 1

△△ Pin 1

△ ∅0.50

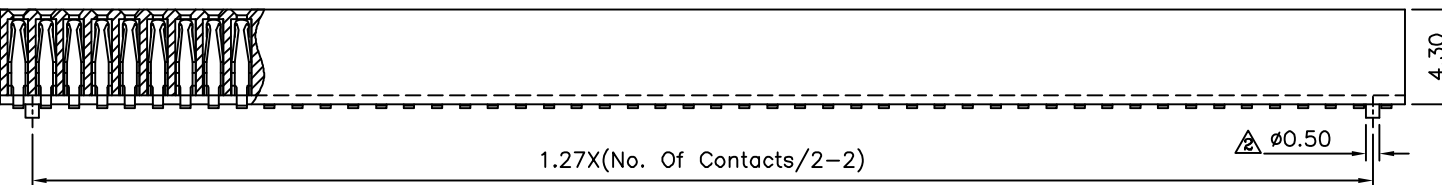

2.00°

1.27XNo. Of Contacts/2+0.38

1.27X(No. Of Contacts/2-1)

1.27X(No. Of Contacts/2-1)

1.27X(No. Of Contacts/2-2)

1.27

0.74

∅0.80

1.47

1.27

4.30

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18407

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.20
 .X ±0.15
 .XX ±0.10
 .XXX ±0.05

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	12/03/2013
△ A1		Modify Data	HZF	04/30/2010
△ A0		NEW RELEASE	SHIN	11/28/2006