


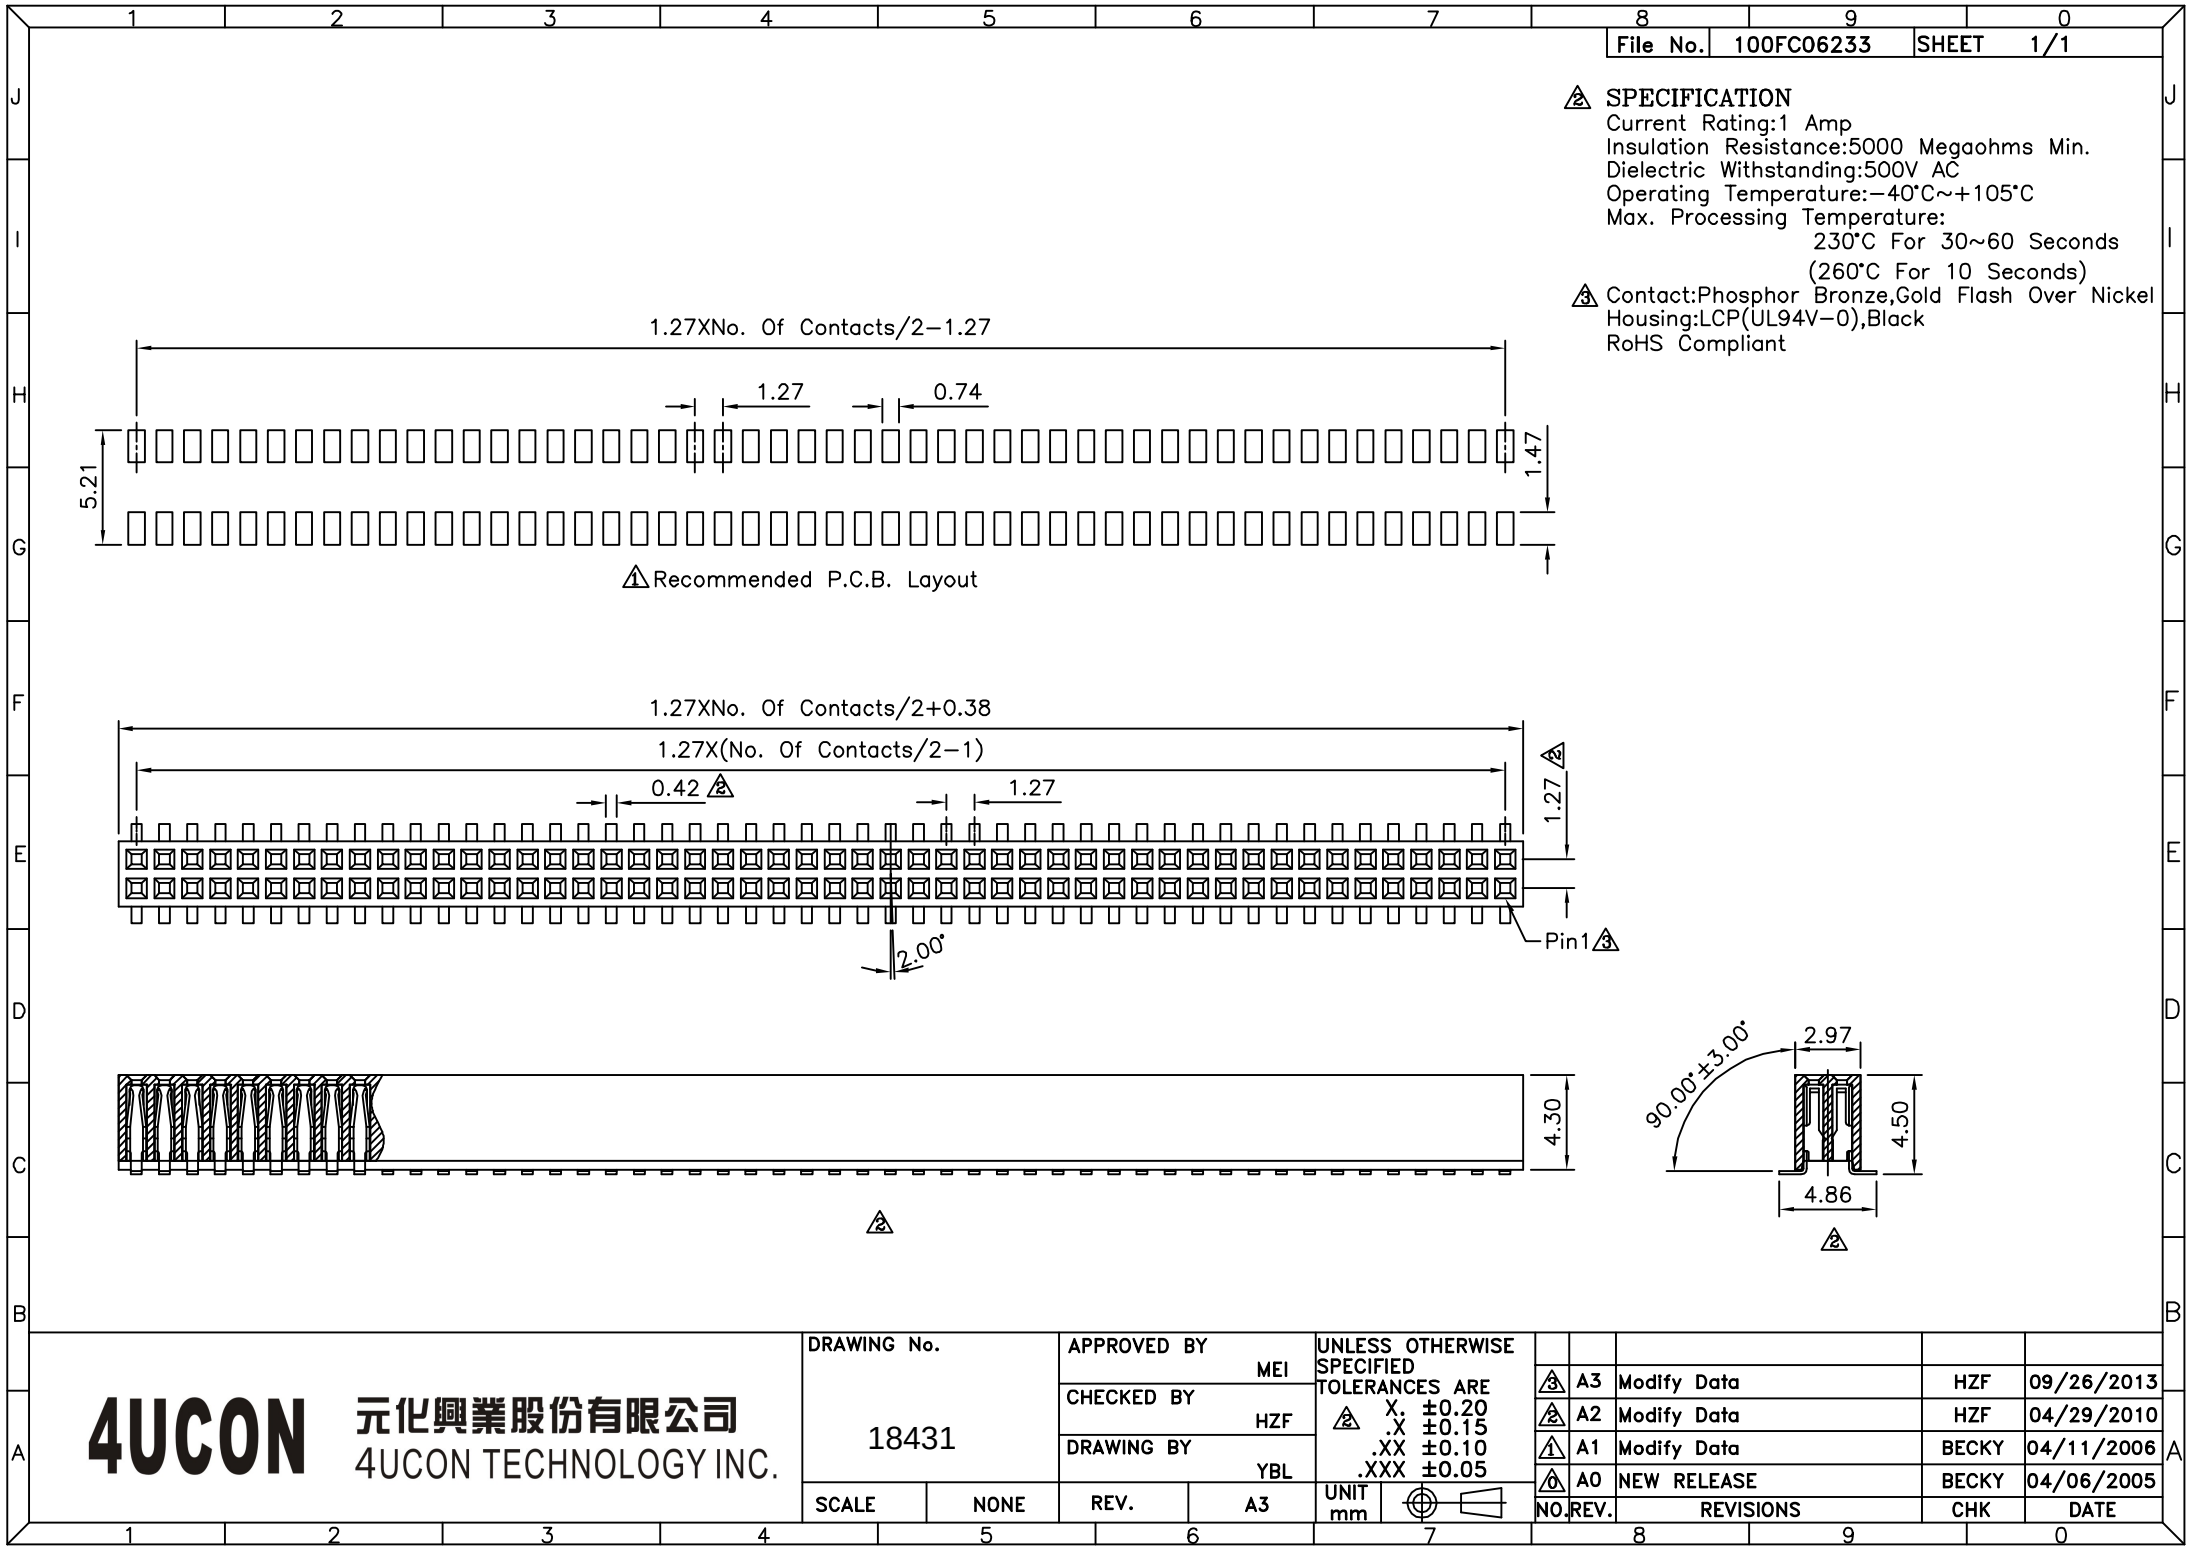

△ SPECIFICATION
Current Rating:1 Amp
Insulation Resistance:5000 Megaohms Min.
Dielectric Withstanding:500V AC
Operating Temperature:−40°C~+105°C
Max. Processing Temperature:
230°C For 30~60 Seconds
(260°C For 10 Seconds)
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
Housing:LCP(UL94V−0),Black
RoHS Compliant

△ Recommended P.C.B. Layout

Pin1△

△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 18431		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.20 .X ±0.15 .XX ±0.10 .XXX ±0.05						
		MEI				Ⓐ A3	Modify Data		HZF	09/26/2013
		CHECKED BY				Ⓐ A2	Modify Data		HZF	04/29/2010
		HZF				Ⓐ A1	Modify Data		BECKY	04/11/2006
		DRAWING BY				Ⓐ A0	NEW RELEASE		BECKY	04/06/2005
YBL										
SCALE	NONE	REV.	A3	UNIT mm		NO. REV.	REVISIONS		CHK	DATE