





2 SPECIFICATION

Current Rating:1 Amp
Insulation Resistance:5000 Megaohms Min.
Dielectric Withstanding:500V AC
Operating Temperature:-40°C~+105°C
Max. Processing Temperature:
230°C For 30~60 Seconds
(260°C For 10 Seconds)

⚠ Contact: Phosphor Bronze, Gold Flash Over Nickel
Housing: LCP (UL94V-0), Black
RoHS Compliant

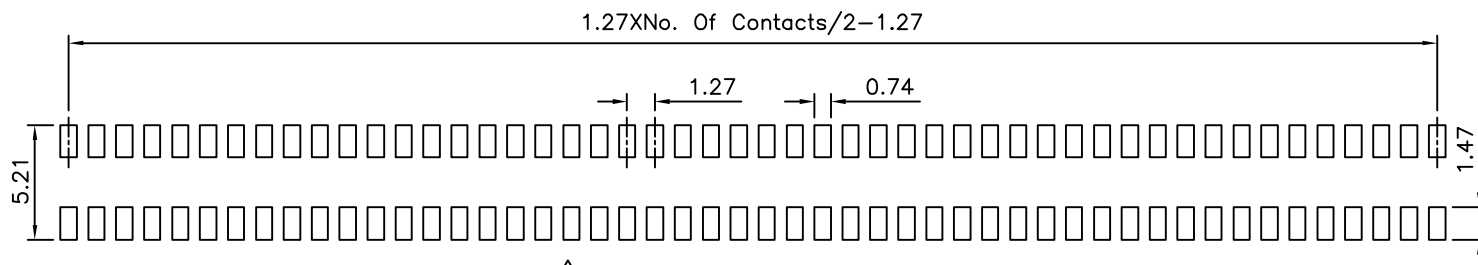

① Recommended P.C.B. Layout

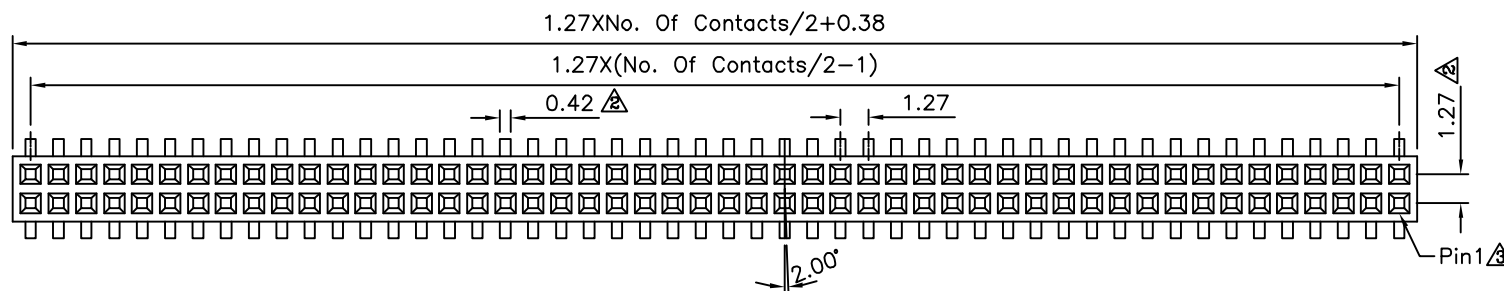

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

18433

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

YBL

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

	X.	±0.20
△2	.X	±0.15
	.XX	±0.10
	.XXX	±0.05

UNIT	mm
------	----



$\triangle 3$	A3
---------------	----

3	Modify Data
---	-------------

$\frac{A}{2}$	A2
---------------	----

2	Modify Data
---	-------------

$\triangle 1$	A1
---------------	----

1	Modify Data
---	-------------

		AC
--	---	----

0	NEW RELEASES
---	--------------

NO.	REV
-----	-----

REV.	REVI
------	------

	HZF
--	-----

	09/26/2013
--	------------

	HZF
--	-----

04/29/2010

BECKY	
-------	--

Y	04/11/2006
---	------------

BECKY	
-------	--

Y	04/06/2005
---	------------

CHK

	DATE
--	------