

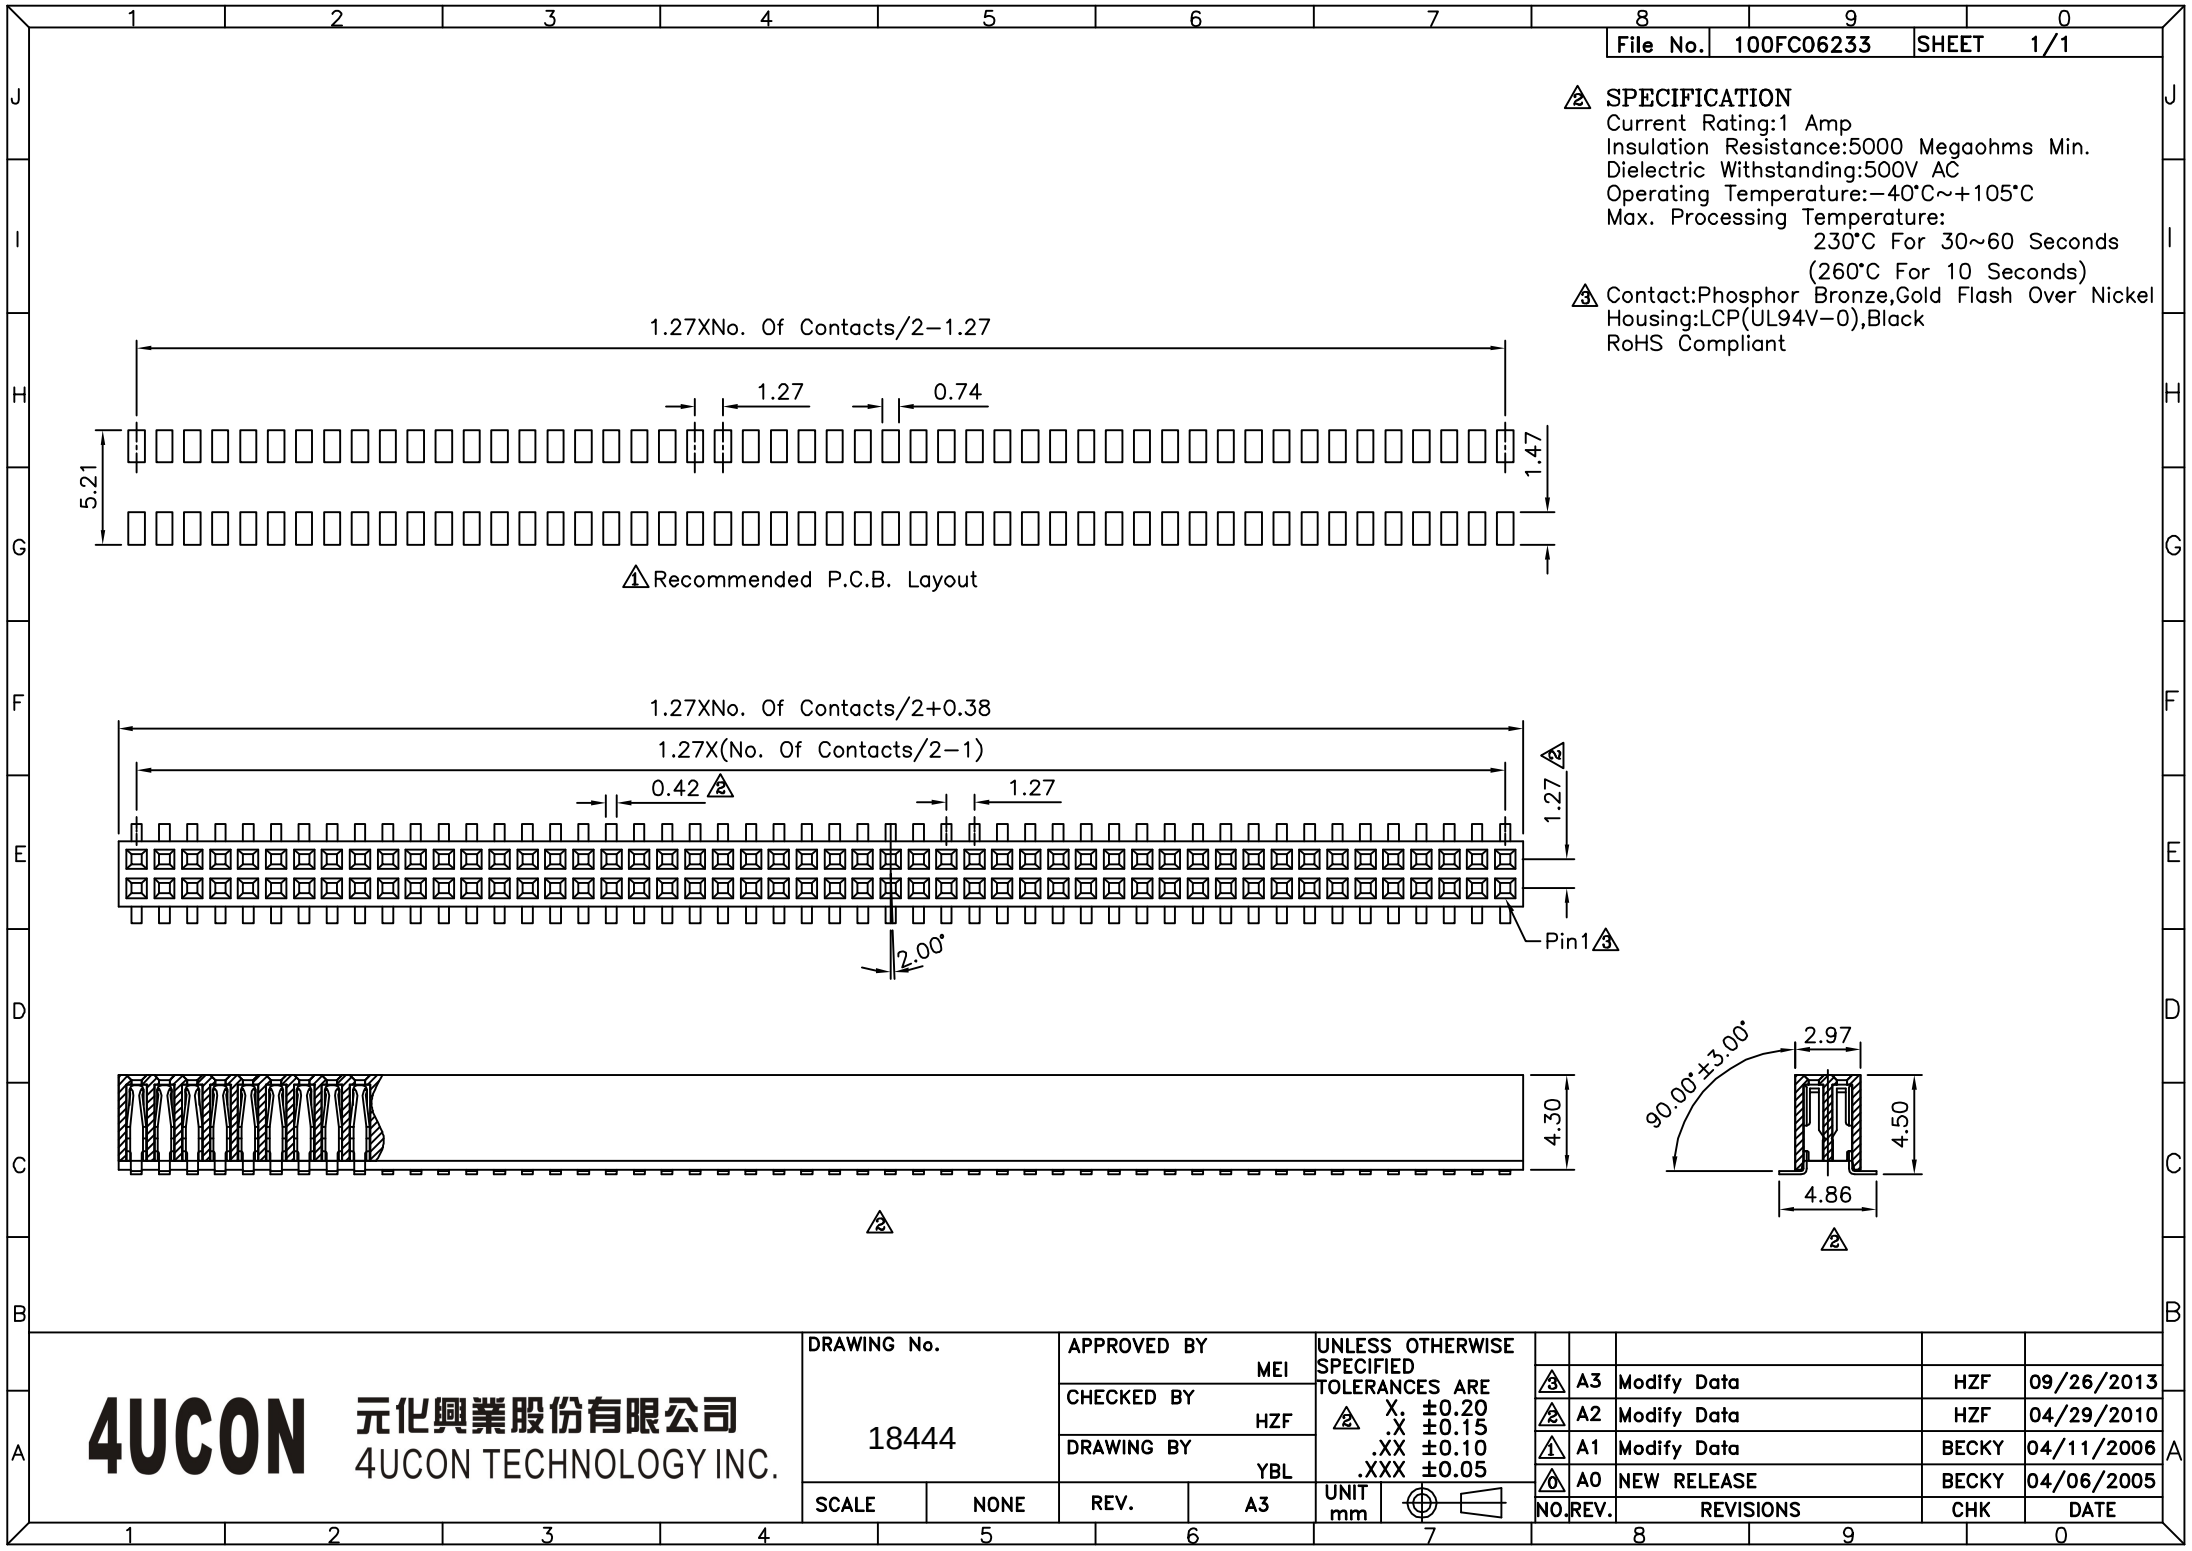

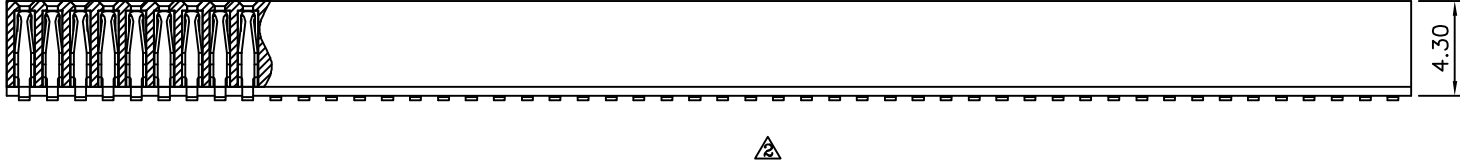


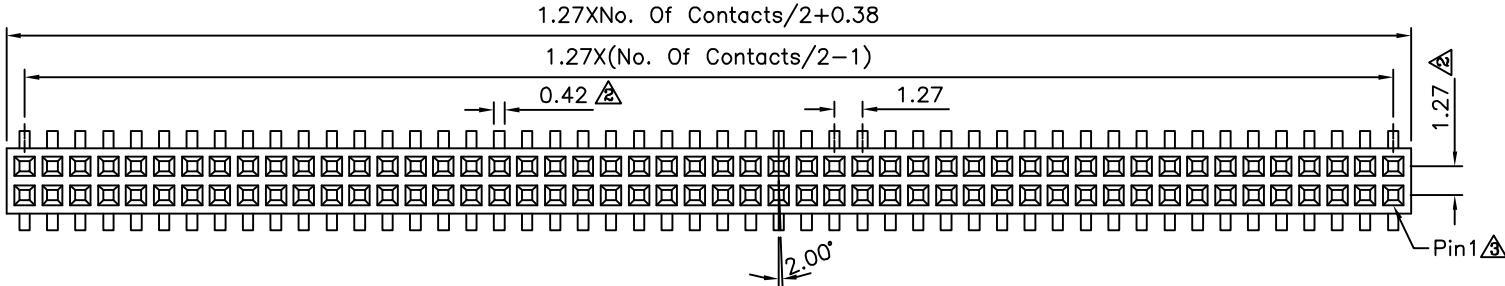

④ SPECIFICATION	
Current Rating:1 Amp	
Insulation Resistance:5000 Megaohms Min.	
Dielectric Withstanding:500V AC	
Operating Temperature:−40°C~+105°C	
Max. Processing Temperature:	
230°C For 30~60 Seconds	
(260°C For 10 Seconds)	
④ Contact:Phosphor Bronze,Gold Flash Over Nickel	
Housing:LCP(UL94V-0),Black	
RoHS Compliant	

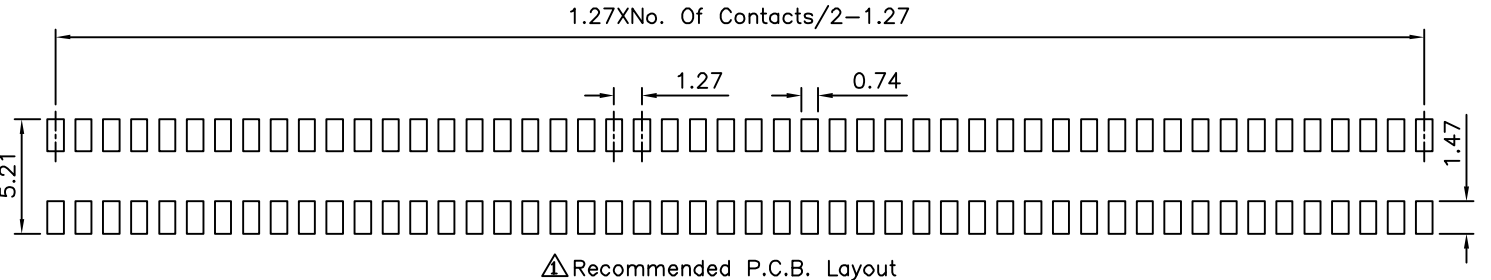

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
18444		MEI		X. ±0.20		△ A3	Modify Data	HZF	09/26/2013
		HZF		.X ±0.15		△ A2	Modify Data	HZF	04/29/2010
		YBL		.XX ±0.10		△ A1	Modify Data	BECKY	04/11/2006
SCALE		NONE		REV.		.XXX ±0.05		△ A0	NEW RELEASE
				A3		UNIT mm		BECKY	04/06/2005
						NO. REV.		REVISIONS	CHK
								DATE	