


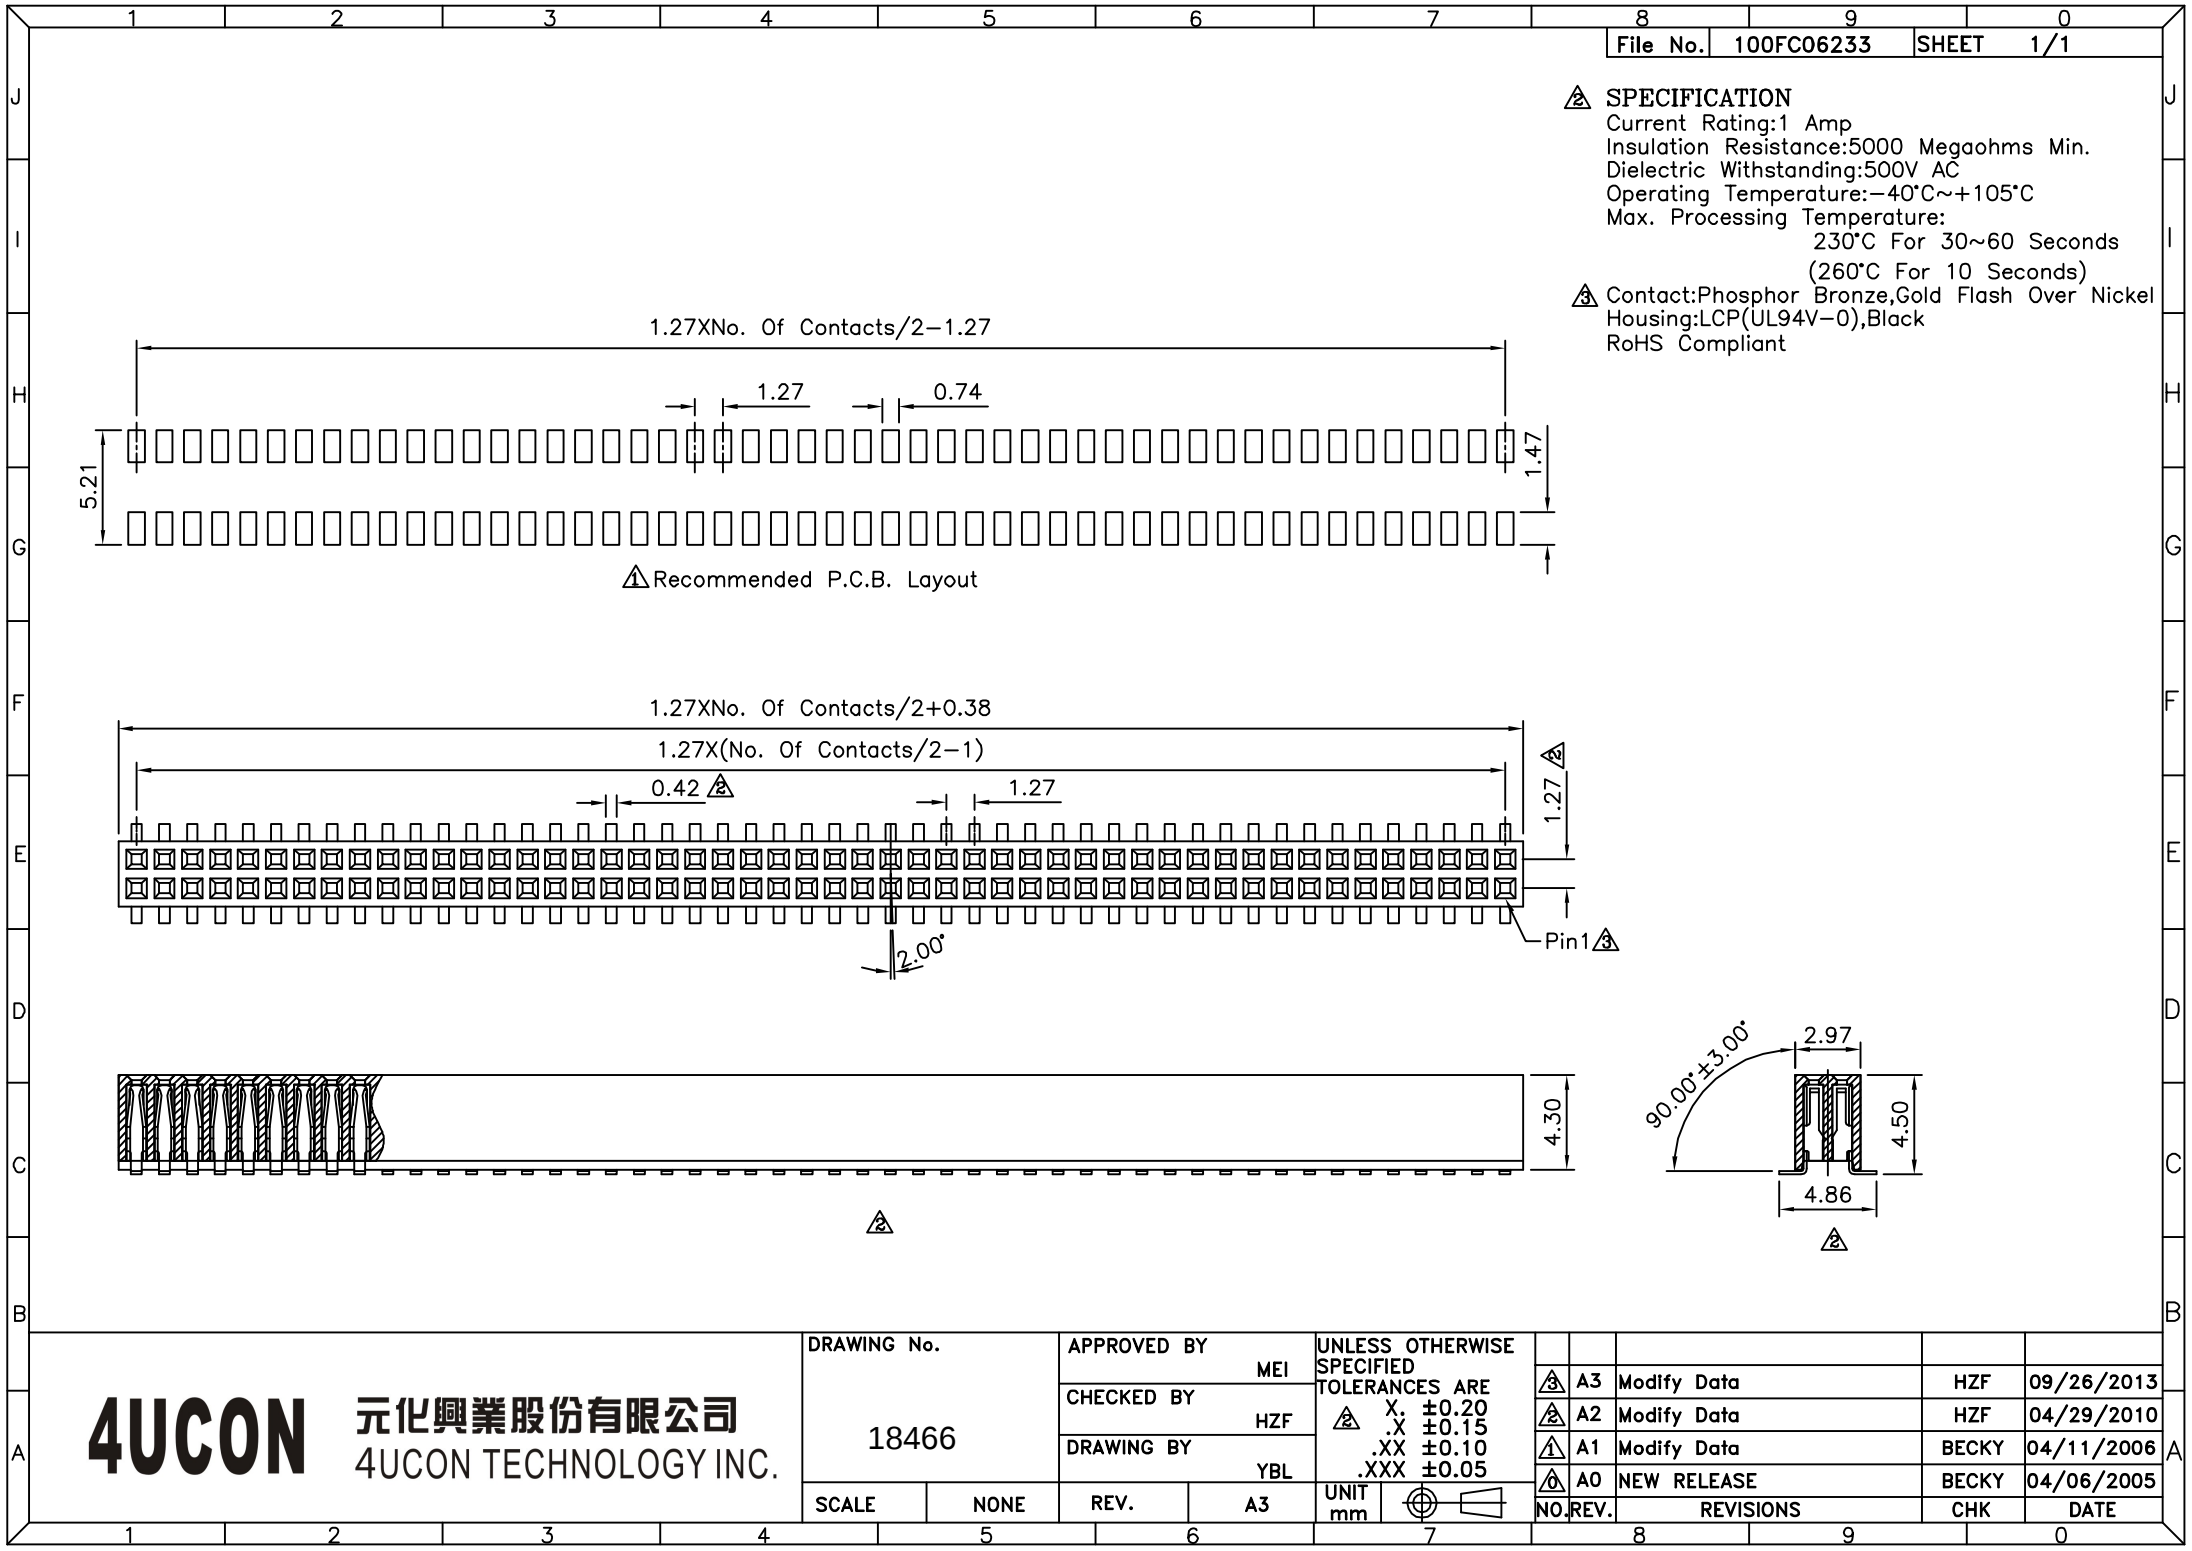

△ SPECIFICATION
Current Rating:1 Amp
Insulation Resistance:5000 Megaohms Min.
Dielectric Withstanding:500V AC
Operating Temperature:−40°C~+105°C
Max. Processing Temperature:
230°C For 30~60 Seconds
(260°C For 10 Seconds)
△ Contact:Phosphor Bronze,Gold Flash Over Nickel
Housing:LCP(UL94V−0),Black
RoHS Compliant

△ Recommended P.C.B. Layout

Pin1 **△**

△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
18466		HZF	
		DRAWING BY	
		YBL	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
△ X.	±0.20
△ .X	±0.15
△ .XX	±0.10
△ .XXX	±0.05
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	09/26/2013
△ A2		Modify Data	HZF	04/29/2010
△ A1		Modify Data	BECKY	04/11/2006
△ A0		NEW RELEASE	BECKY	04/06/2005